



**PASSENGER CAR & LIGHT TRUCK
TYRES CATALOG**

ZAFCO's first in-house brand, **ZEETEX** was born in 2005 and is now sold in over 132 countries.

ZEETEX has been a key player in the replacement tire industry since its inception. With unique tread patterns, enhanced control, silica compound, and environmentally friendly solutions, the **ZEETEX** brand is committed to providing the best value for money to our customers. Whether it is integration with cutting-edge technology in tire production, or first-class supply-chain management, we strive to ensure every tire reaches the end user in perfect condition.

ZEETEX's proven performance and continuous efforts to offer consumers a value-driven proposition and ride satisfaction has led to growth at a tremendous pace.

PASSENGER

ULTRA HIGH PERFORMANCE

SPORT UTILITY VEHICLE

4X4

LIGHT TRUCK



ZT5000 *max*

THE NEXT-GEN PASSENGER TIRE

For Passenger Cars


SUMMER RANGE UTQG500 A A

ZT5000 max

This next-gen passenger tire offers enhanced performance during wet conditions. A closed shoulder block design allows better steering response and tire longevity.



Wide positioning of four main grooves eject water at a faster rate for improved wet grip

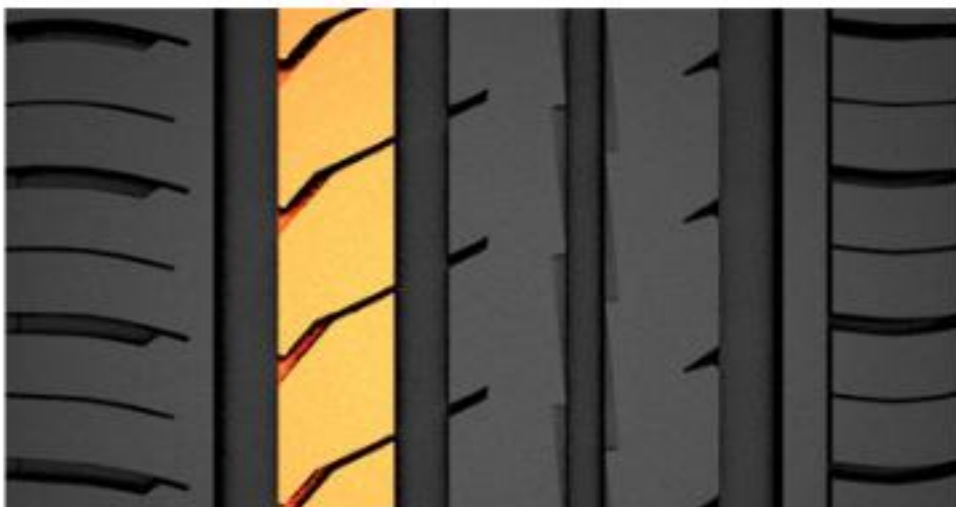

Angular sipes and rigid blocks on the inner side increase road grip and traction while cornering



Closed shoulder blocks enhance steering response and stability while preventing irregular wear

Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
70 Series	175/70R14	88H	XL	560	50	5.0	177	602	7.6
	185/70R14	88H		560	44	5.5	189	616	7.6
	195/70R14	95H	XL	690	50	6.0	201	625	7.6
	205/70R15	96H		710	44	6.0	209	664	7.8
	215/70R15	98H		750	44	6.5	221	678	7.8
65 Series	165/65R14	79H		437	44	5.0	170	565	7.0
	175/65R14	82H		475	44	5.0	177	584	7.6
	185/65R14	86H		530	44	5.5	189	596	7.6
	185/65R15	88H		560	44	5.5	189	616	7.8
	195/65R15	91H		615	44	6.0	201	630	7.8
	205/65R15	94V		670	44	6.0	209	642	7.8
	205/65R16	95V		690	44	6.0	209	672	7.8
	215/65R16	98H		750	44	6.5	221	686	7.8
60 Series	175/60R15*	81H		462	44	5.0	177	586	7.8
	185/60R15	84H		500	44	5.5	189	598	7.8
	195/60R15	88H		560	44	6.0	201	610	7.8
	205/60R15	91V		615	44	6.0	209	622	7.8
	195/60R16	89H		580	44	6.0	201	640	7.8
	205/60R16	92V		630	44	6.0	209	648	7.8
	215/60R16	99V	XL	775	50	6.5	221	664	7.8
	225/60R16	102V	XL	850	50	6.5	228	671	7.8
	215/60R17	96H		710	44	6.5	221	690	7.8
	225/60R17	99V		775	44	6.5	228	697	8.3
55 Series	185/55R15*	82V		475	44	6.0	194	580	7.8

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For Passenger Cars

SUMMER RANGE UTQG500 A A

ZT5000 max



This next-gen passenger tire offers enhanced performance during wet conditions. A closed shoulder block design allows better steering response and tire longevity.





Performance results against Tier 2 & Tier 3 brands tested in IDIADA, Spain

Tire size tested: 225/60R17 99V



Internal Noise on Smooth Road @ 37.2 mph (60 kph)

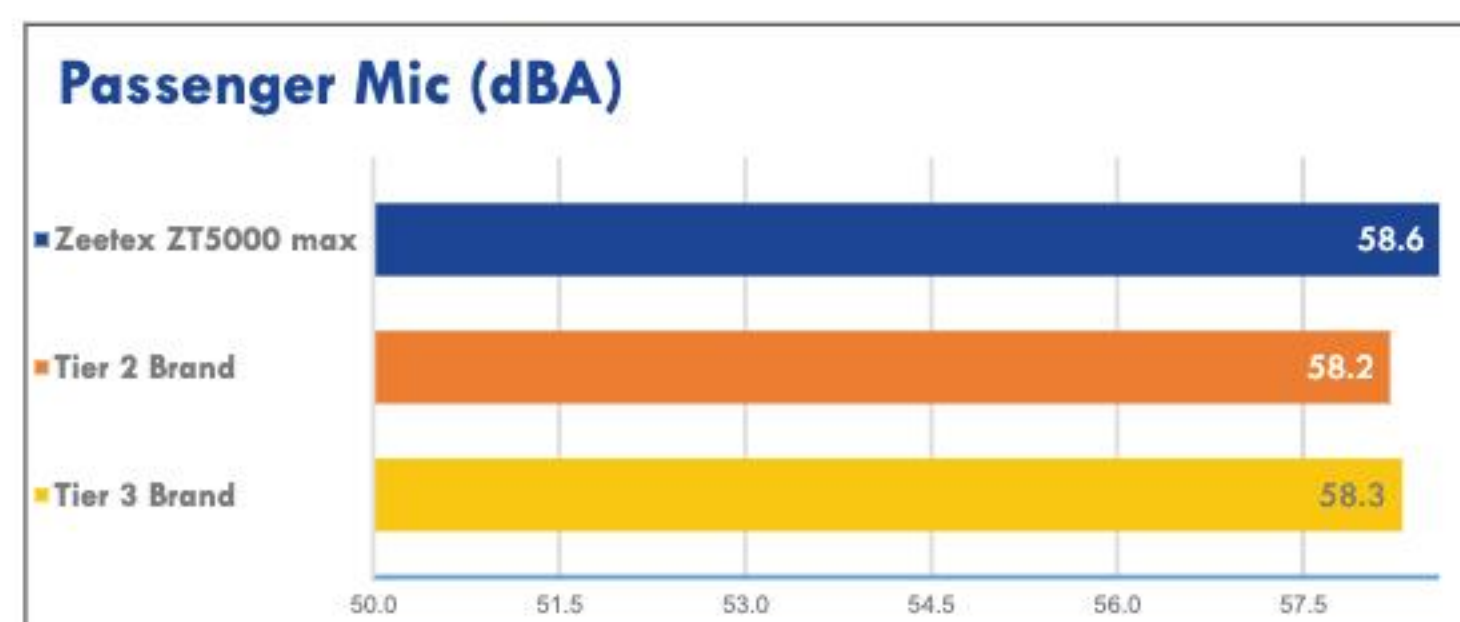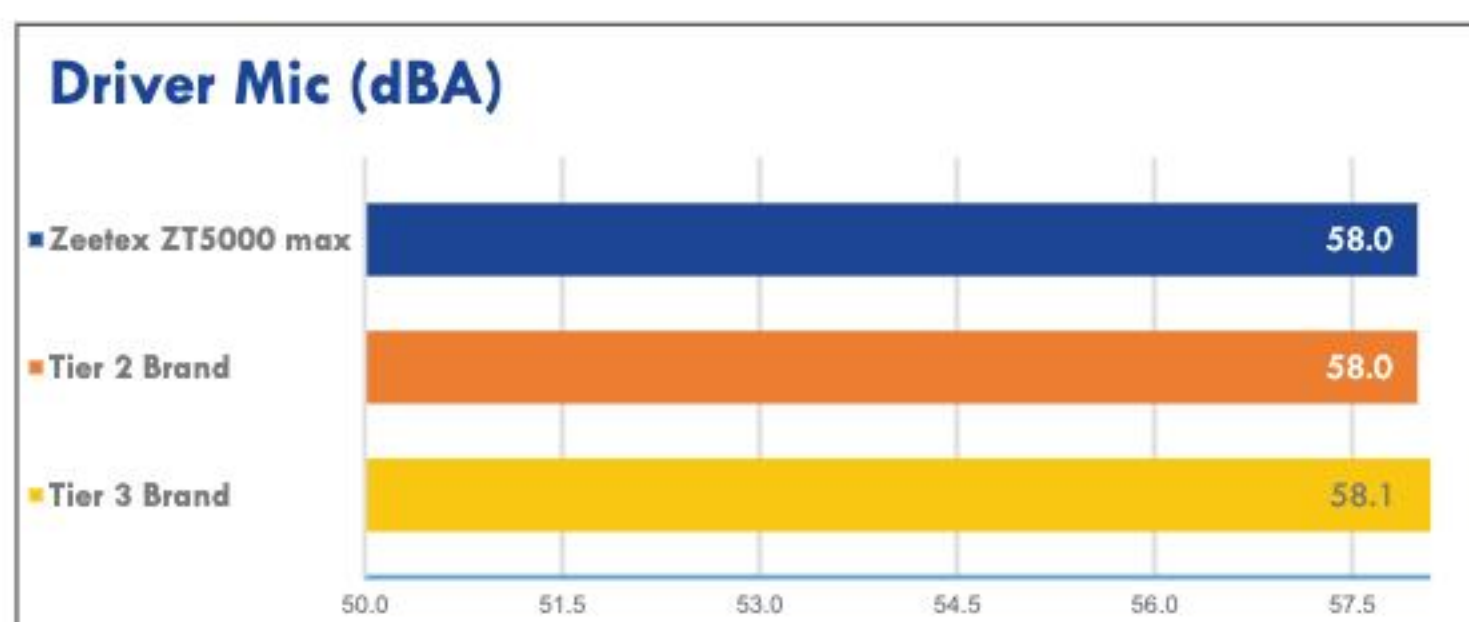



Internal Noise on Smooth Road @ 49.7 mph (80 kph)

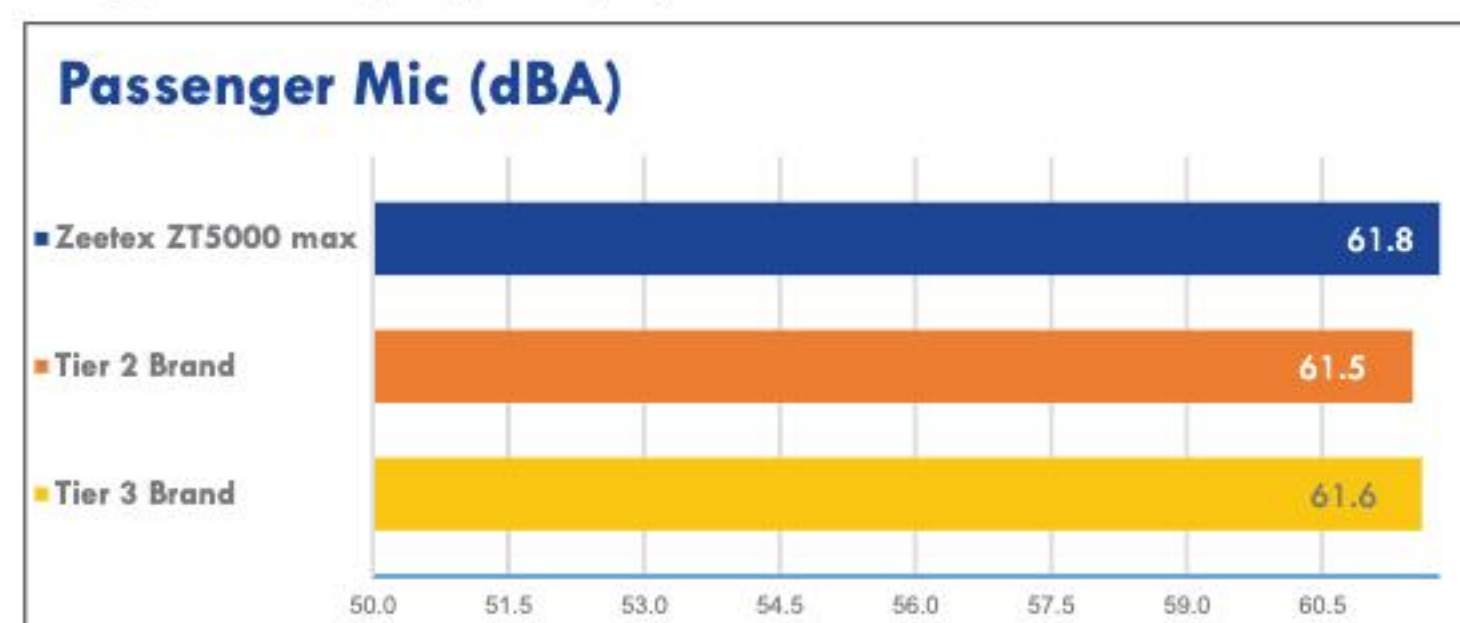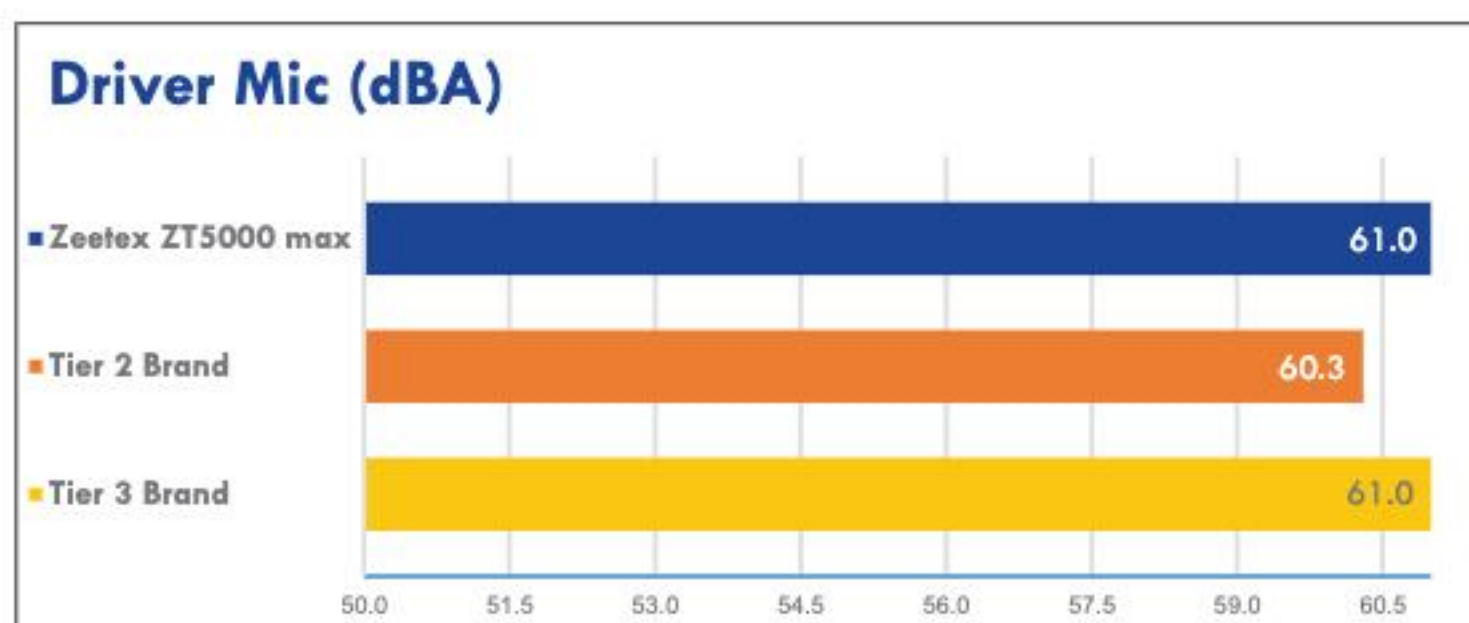


Internal Noise on Rough Road @ 37.2 mph (60 kph)

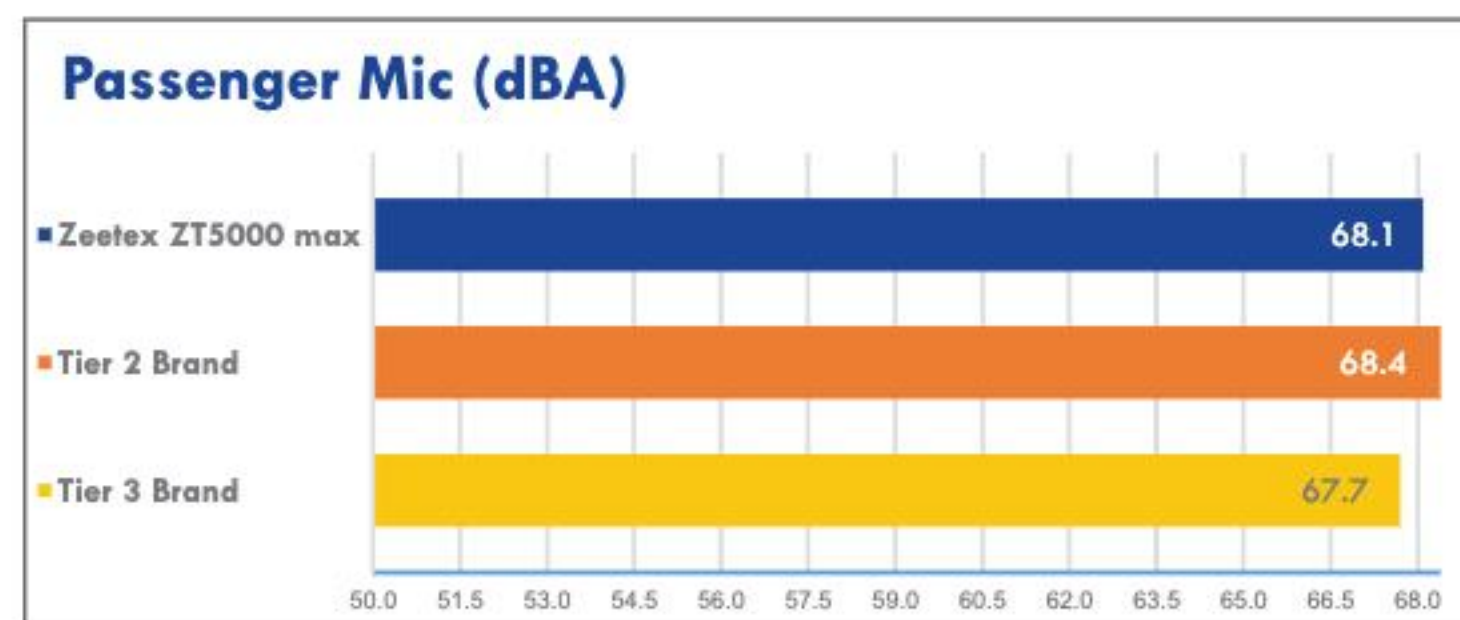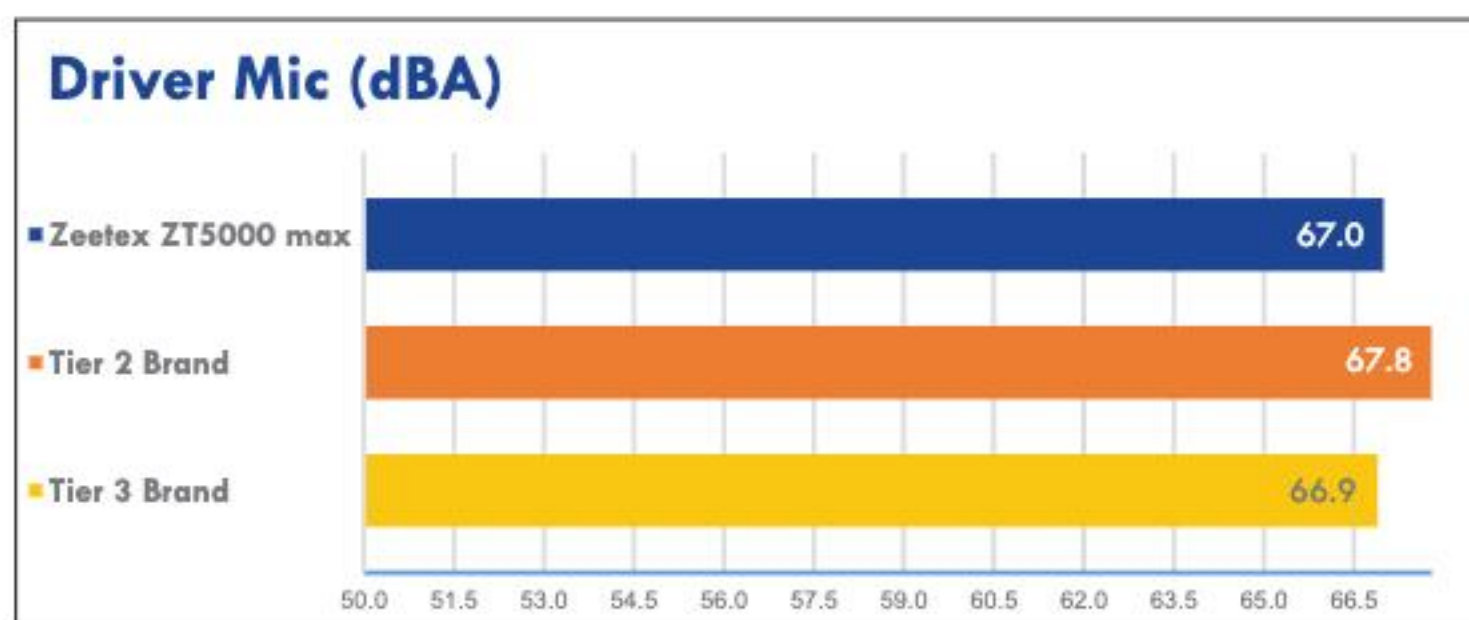


Internal Noise on Rough Road @ 49.7 mph (80 kph)

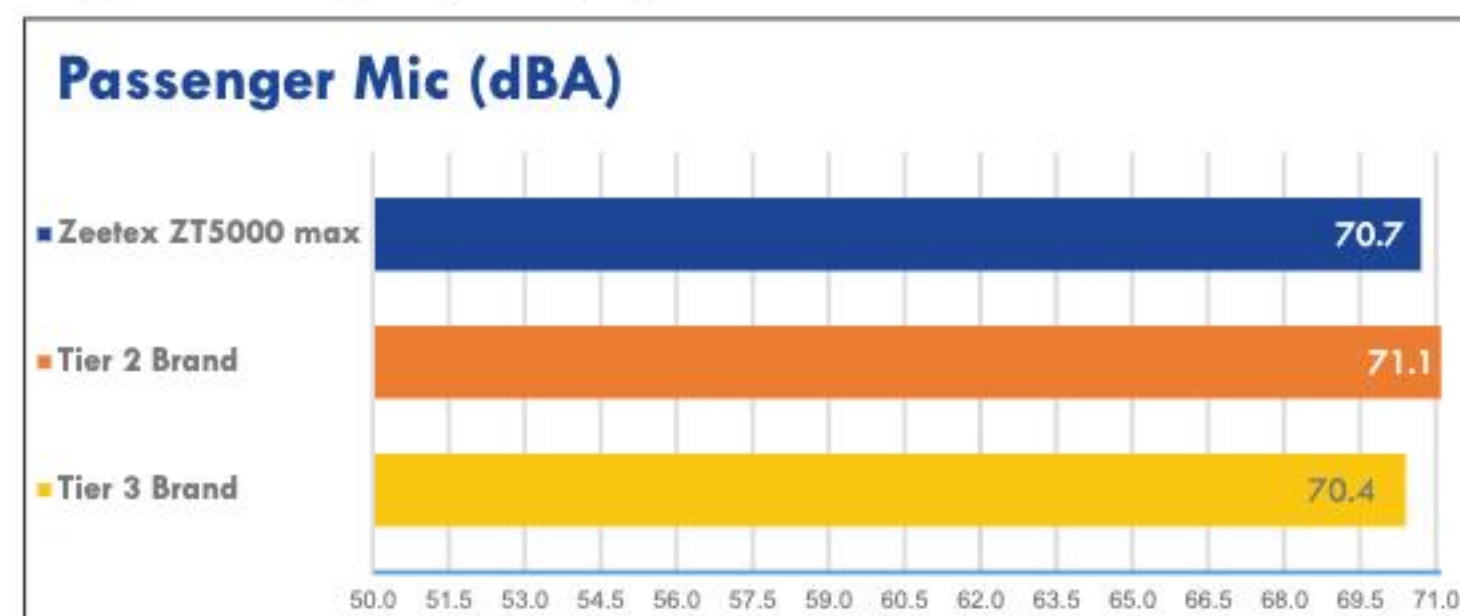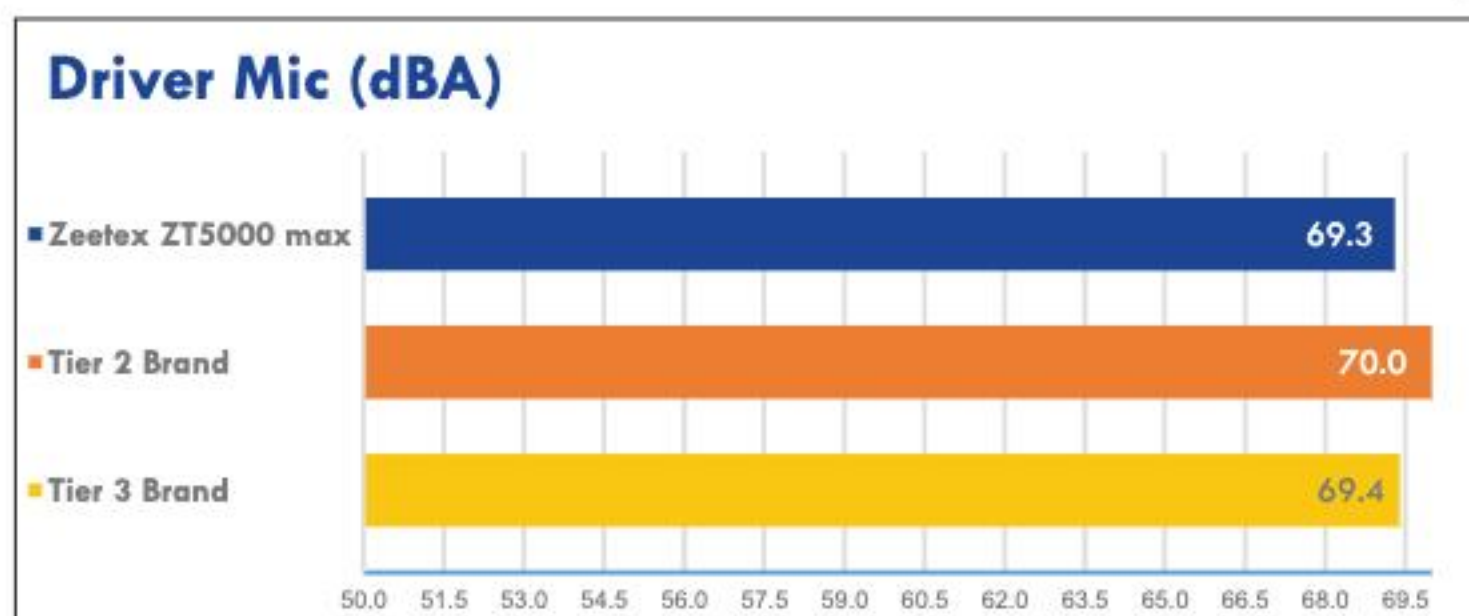


Dry Braking Distance in Feet

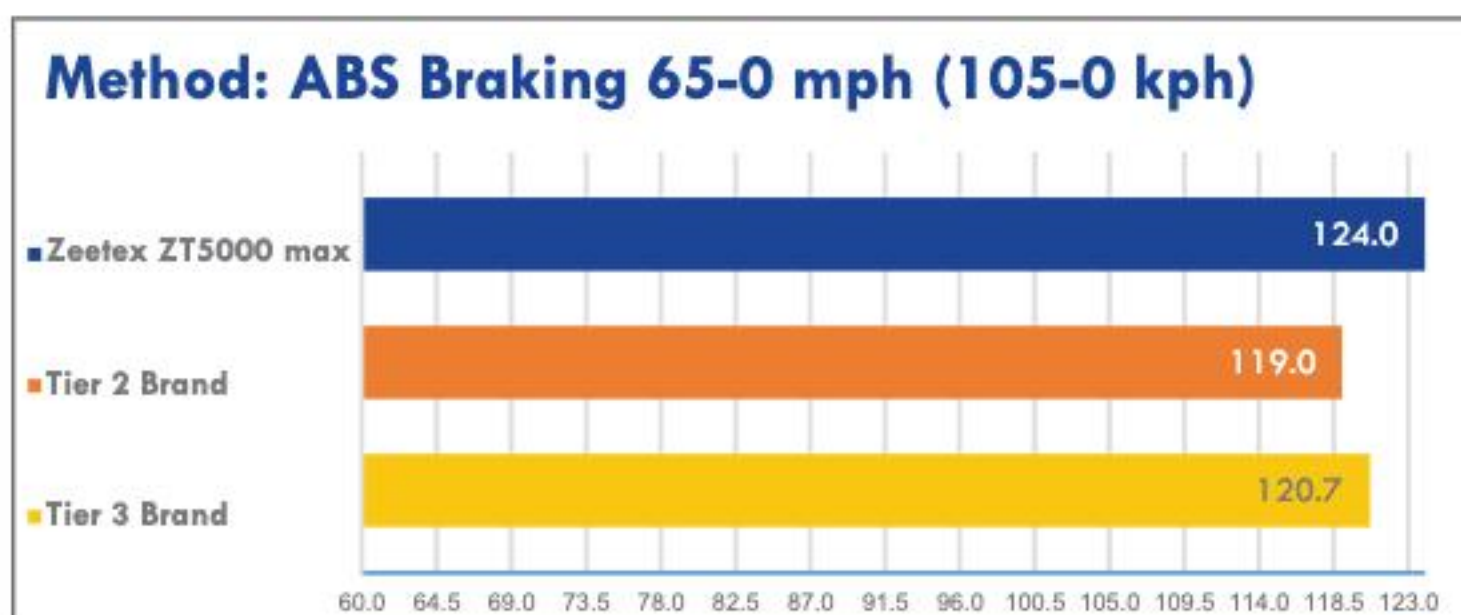

Dry Handling

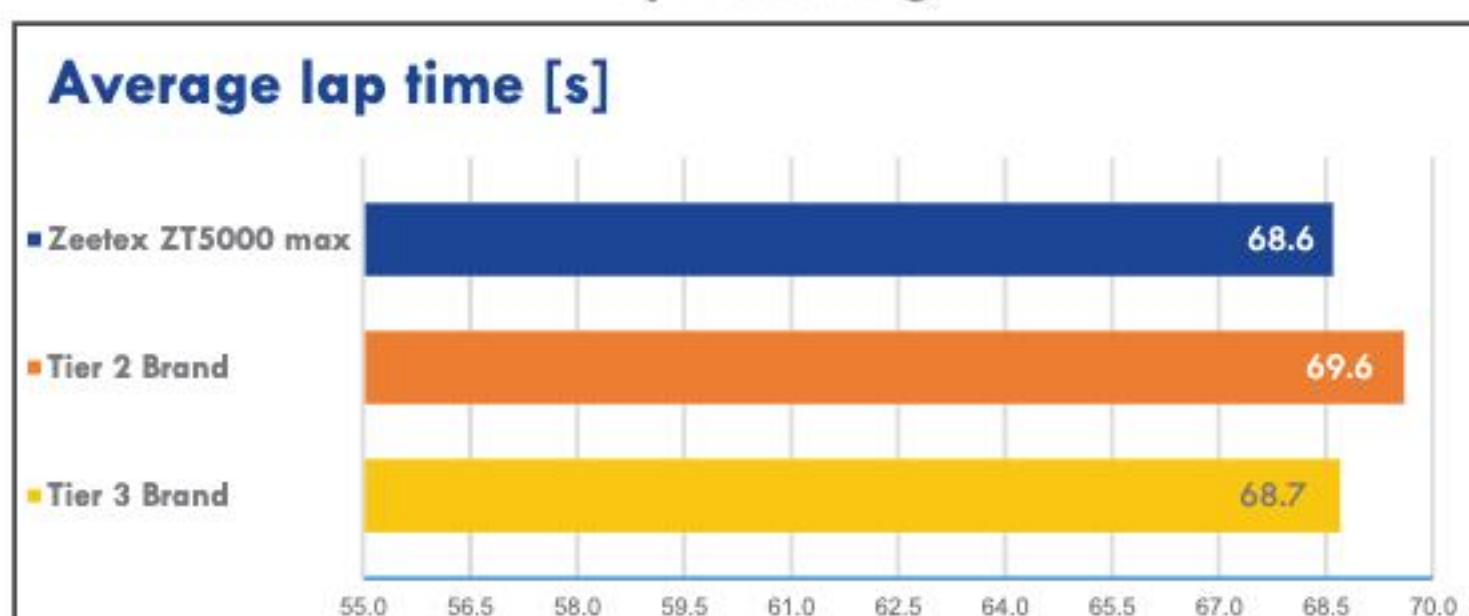

Wet Handling

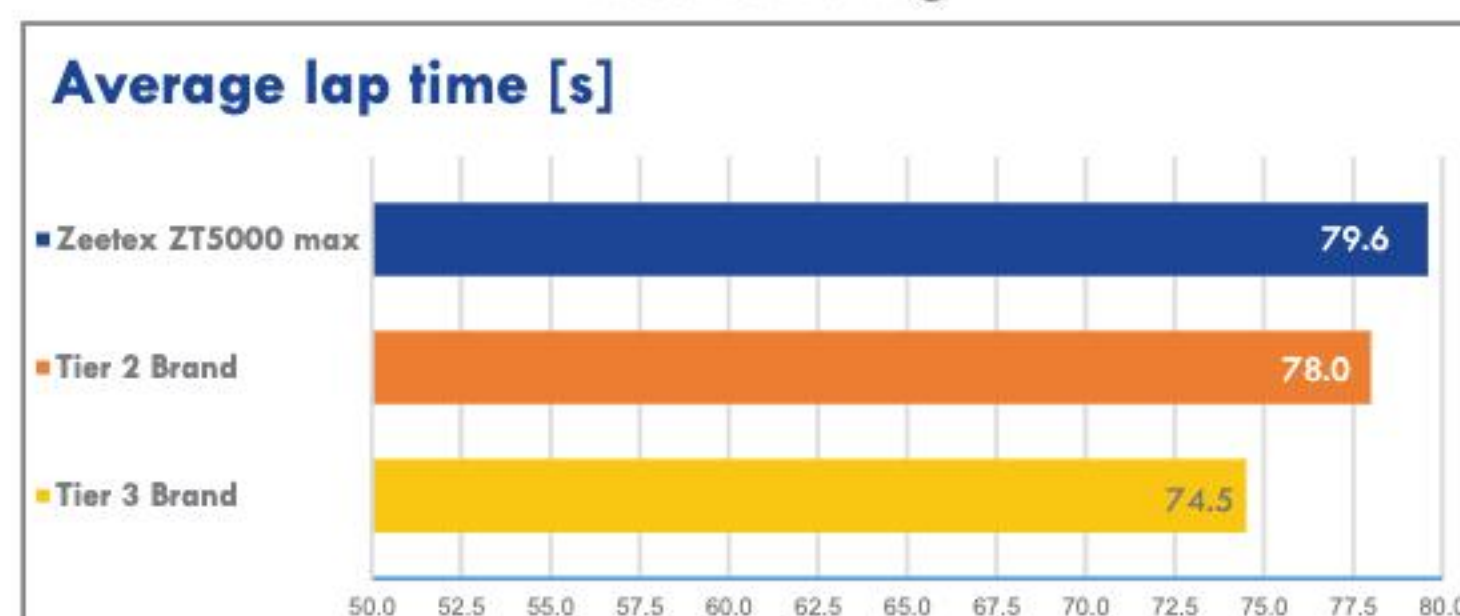



AT5000 max


For 4x4's on All Terrain

SUMMER RANGE UTQG 500 A B

AT5000 max



Aggressive, interlocking center blocks Dense interlocking tread blocks improve on-road stability and handling while maintaining strong off-road traction in mud and dirt.

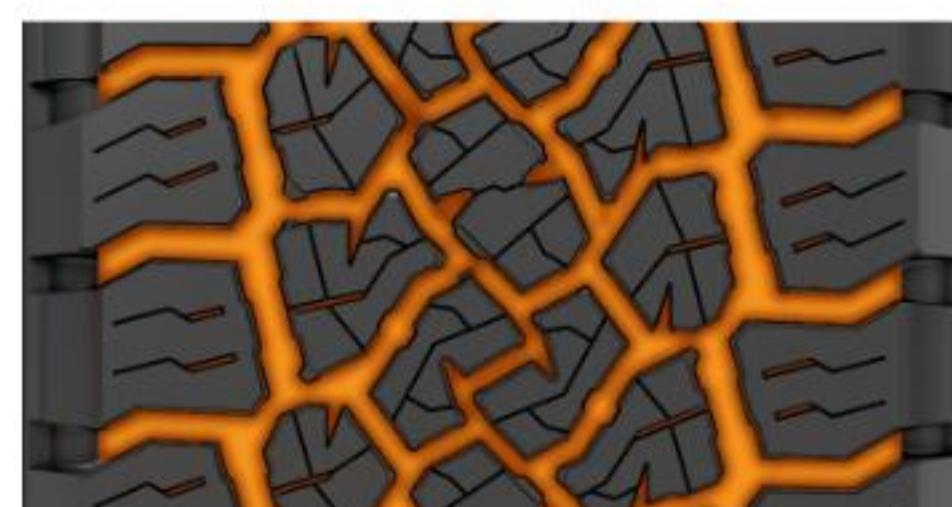

High void ratio and circumferential grooves Wide grooves and high void ratio enhance wet-road resistance and quickly evacuate mud and water for consistent traction.



Deep shoulder blocks with aggressive sidewall styling Larger, deeper shoulder blocks provide strong grip, better cornering traction, and effective self-cleaning to remove debris.

							P METRIC	
Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	265/70R16	116T XL	1250	50	8.0	272	778	10.4
	265/70R17	116T XL	1250	50	8.0	272	804	10.4
	285/70R17	117T	1285	44	8.5	292	832	10.4
65 Series	265/65R17	116T XL	1250	50	8.0	272	776	10.4
	265/65R18	114T	1180	44	8.0	272	801	10.4
	275/65R18	116T	1250	44	8.0	279	815	10.4
60 Series	265/60R18	110T	1060	44	8.0	272	770	10.4
	285/60R18	120S XL	1400	50	8.5	292	794	10.4
55 Series	275/55R20	117T XL	1285	50	8.5	284	810	10.4
50 Series	265/50R20	111T XL	1090	50	8.5	277	774	10.4

									LT METRIC	
Series	Size	PR	Load & Speed Index	Maximum Load (Single)	Maximum Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
85 Series	LT 235/85R16	10	120/116S	1380	1260	80	6.5	235	806	13.7
75 Series	LT 265/75R16	10	123/120S	1550	1400	80	7.5	267	804	13.7
	LT 285/75R16	10	126/123S	1700	1550	80	8.0	286	834	13.7
70 Series	LT 255/70R15	8	113/110S	1150	1060	65	7.5	260	739	13.7
	LT 265/70R17	10	121/118S	1450	1320	80	8.0	272	804	13.7
	LT 285/70R17	10	121/118S	1450	1320	80	8.5	292	832	13.7
	LT 315/70R17	10	126/123S	1700	1550	65	9.5	323	874	13.7
65 Series	LT 265/65R17	10	120/117S	1400	1285	80	8.0	272	775	13.7
	LT 285/65R18	10	125/122S	1650	1500	80	8.5	292	827	13.7
60 Series	LT 265/60R18	10	119/116S	1360	1250	80	8.0	272	770	13.7
	LT 285/60R18	10	122/119S	1500	1360	80	8.5	292	794	13.7

Pattern availability may slightly vary based on country, please reach out to your account manager for details.




CT5000 max

For Vans and Transport Vehicles

SUMMER RANGE

CT5000 max

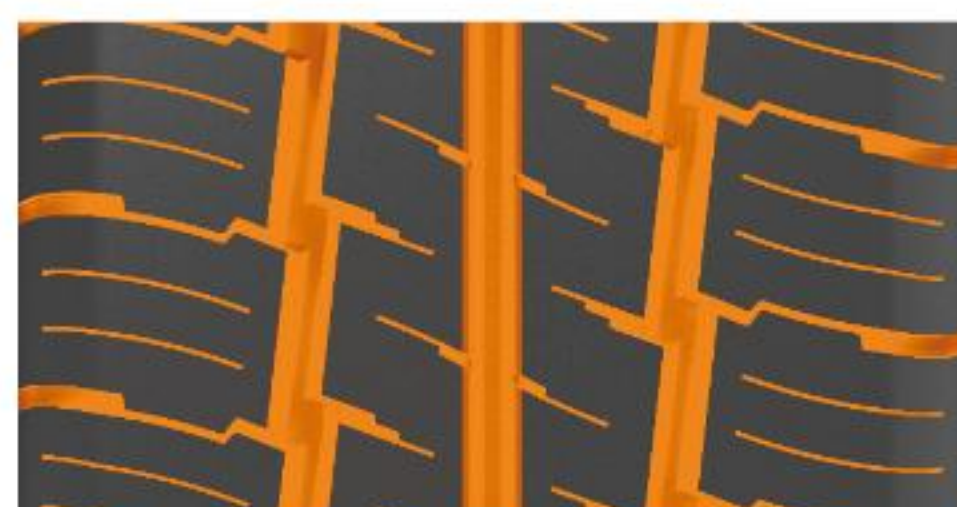


Deep circumferential grooves & multiple sipes

Deep grooves and dense sipes enhance water evacuation, reducing hydroplaning and improving traction on wet and dry roads.



Robust center ribs & interlocking shoulder blocks

Solid center ribs and interlocking shoulder blocks improve stability, load distribution, and steering response for heavy-duty use.

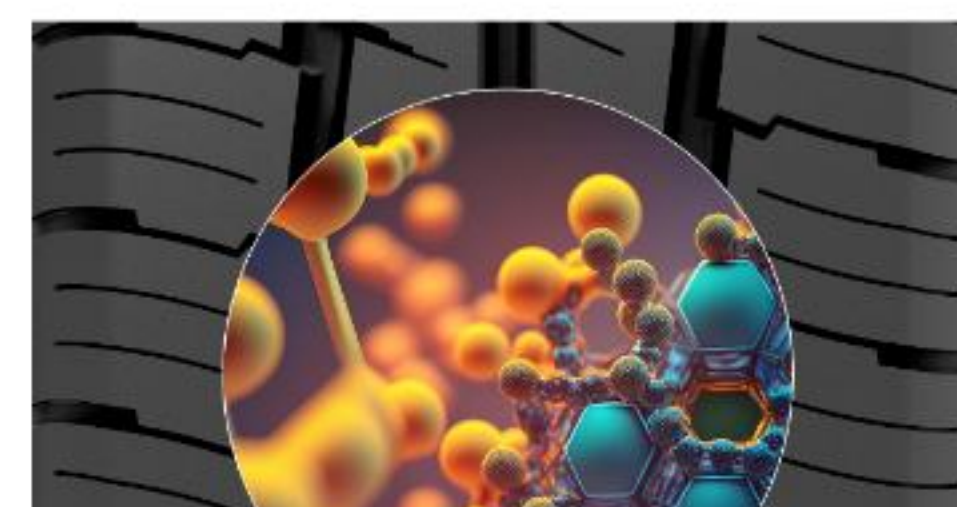

Optimized tread compound & block geometry

Uniform block design with a durable compound ensures even wear, longer tread life, and better fuel efficiency.

Series	Size	PR	Load & Speed Index	Maximum Load (Single)	Maximum Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
75 Series	205/75R14C	8	109/107S	1030	975	69	5.5	203	664	8.8
	205/75R16C	8	110/108T							
	205/75R16C	10	113/111T	1150	1090	77	5.5	203	714	8.8
70 Series	215/70R15C	8	109/107T	1030	975	65	6.5	221	678	8.8
	225/70R15C	8	112/110T	1120	1060	65	6.5	228	697	9.5
	215/70R16C	8	108/106T	1000	950	55	6.5	221	708	8.8
65 Series	215/65R16C	8	109/107T	1030	975	69	6.5	221	681	8.8
	235/65R16C	8	115/113T							
	235/65R16C	10	121/119R	1450	1360	83	7.0	240	712	8.8
LTRC	185R14C	8	102/100T	850	800	65	5.5	188	650	8.8
	195R14C	8	106/104T	950	900	65	5.5	198	666	8.8
	195R15C	8	106/104S	950	900	65	5.5	200	690	8.8
	205R16C	8	110/108T	1060	1000	65	6.0	208	736	8.8

Pattern availability may slightly vary based on country, please reach out to your account manager for details.



HP5000 max

THE NEXT-GEN ULTRA-HIGH PERFORMANCE TIRE

For High-performance and Luxury Vehicles


SUMMER RANGE UTQG340 A A

HP5000 max

This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique “helical” main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.



Ultra-modern tread and sidewall design suitable for modern vehicles and roads

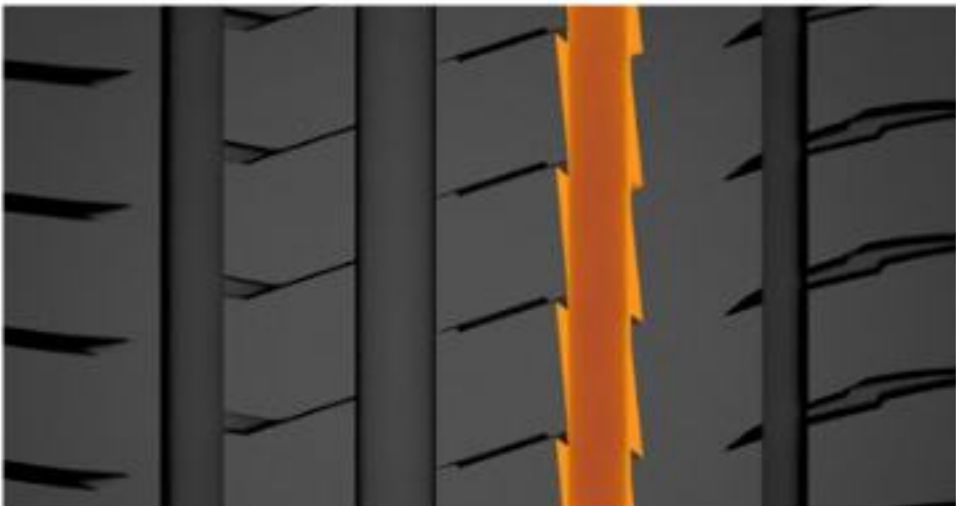

All new “helical” main groove combined with three main grooves allow rapid water ejection by adding an extra swirling effect



Soft tread appearance delivers a very quiet drive

Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
55 Series	195/55R15	89V	XL	580	50	6.0	206	593	7.8
	195/55R16	91V	XL	615	50	6.0	201	615	7.8
	205/55R16	94W	XL	670	50	6.5	214	632	7.8
	215/55R16	97W	XL	730	50	7.0	226	637	7.8
	205/55R17*	95V	XL	690	50	6.5	214	653	7.8
	205/55R17*	95W	XL						
	215/55R17	98W	XL	750	50	7.0	226	669	7.8
	225/55R17	101W	XL	825	50	7.0	233	675	7.8
	235/55R17*	103V	XL						
	235/55R17	103W	XL	875	50	7.5	245	685	7.8
50 Series	195/50R15*	82V		475	44	6.0	201	572	7.8
	195/50R16	88V	XL	560	50	6.0	201	597	7.8
	205/50R16	91W	XL	615	50	6.5	223	608	7.8
	205/50R17	93Y	XL	650	50	6.5	214	633	7.8
	215/50R17	95W	XL	690	50	7.0	226	648	7.8
	225/50R17	98W	XL	750	50	7.0	233	658	7.8
	225/50R18	99W	XL	775	50	7.0	233	678	7.8
	235/50R18	101Y	XL	825	50	7.5	245	688	7.8
45 Series	205/45R16	87W	XL	545	50	7.0	206	590	7.8
	205/45R17	88W	XL	560	50	7.0	206	616	7.8
	215/45R17	91Y	XL	615	50	7.0	213	626	7.8
	225/45R17	94Y	XL	670	50	7.5	225	634	7.8
	235/45R17	97Y	XL	730	50	8.0	236	644	7.8
	245/45R17	99Y	XL	775	50	8.0	243	652	7.8
	225/45R18	95Y	XL	690	50	7.5	225	659	7.8
	235/45R18	98Y	XL	750	50	8.0	247	669	7.8
	245/45R18	100Y	XL	800	50	8.0	243	677	7.8
	225/45R19*	96Y	XL	710	50	7.5	225	685	8.0
	245/45R19	102Y	XL	850	50	8.0	243	703	8.0

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For High-performance and Luxury Vehicles

SUMMER RANGE UTQG340 A A

HP5000 max

This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique "helical" main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.



Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
40 Series	245/40R17	95Y XL	690	50	8.5	248	628	7.8
	225/40R18	92Y XL	630	50	8.0	230	637	7.8
	235/40R18	95Y XL	690	50	8.5	241	640	7.8
	245/40R18	97Y XL	730	50	8.5	260	648	7.8
	225/40R19	93Y XL	650	50	8.0	230	663	8.0
	235/40R19*	96Y XL	710	50	8.5	241	666	8.0
	245/40R19	98Y XL	750	50	8.5	260	677	8.0
	255/40R19	100Y XL	800	50	9.0	260	687	8.0
	275/40R19	105Y XL	925	50	9.5	278	703	8.0
	245/40R20	99Y XL	775	50	8.5	248	699	8.0
	255/40R20	101Y XL	825	50	9.0	260	707	8.0
35 Series	255/35R18	94Y XL	670	50	9.0	260	630	7.8
	265/35R18	97Y XL	730	50	9.5	283	636	8.0
	275/35R18	99Y XL	775	50	9.5	288	650	8.0
	235/35R19	91Y XL	615	50	8.5	257	642	8.0
	245/35R19	93Y XL	650	50	8.5	248	650	8.0
	255/35R19	96Y XL	710	50	9.0	260	661	8.0
	265/35R19	98Y XL	750	50	9.5	271	669	8.0
	275/35R19	100Y XL	800	50	9.5	278	670	8.0
	235/35R20	92Y XL	630	50	8.5	241	667	8.0
	245/35R20	95Y XL	690	50	8.5	257	675	8.0
	255/35R20	97Y XL	730	50	9.0	260	681	8.0
	265/35R20	99Y XL	775	50	9.5	271	690	8.0
	275/35R20	102Y XL	850	50	9.5	278	695	8.0
	295/35R20	105Y XL	925	50	10.5	301	709	8.3
	245/35R21	96Y XL	710	50	8.5	248	705	8.0
30 Series	265/30R19	93Y XL	650	50	9.5	271	643	8.0
	275/30R20	97Y XL	730	50	9.5	287	675	8.0

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For High-performance and Luxury Vehicles

SUMMER RANGE **UTQG340 A A**

HP5000 max

This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique “helical” main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.




Performance results against Tier 2 brands tested in IDIADA, Spain

Tire size tested: 225/55R17 101W


Internal Noise on Smooth Road @ 60Km/h



Internal Noise on Smooth Road @ 80Km/h

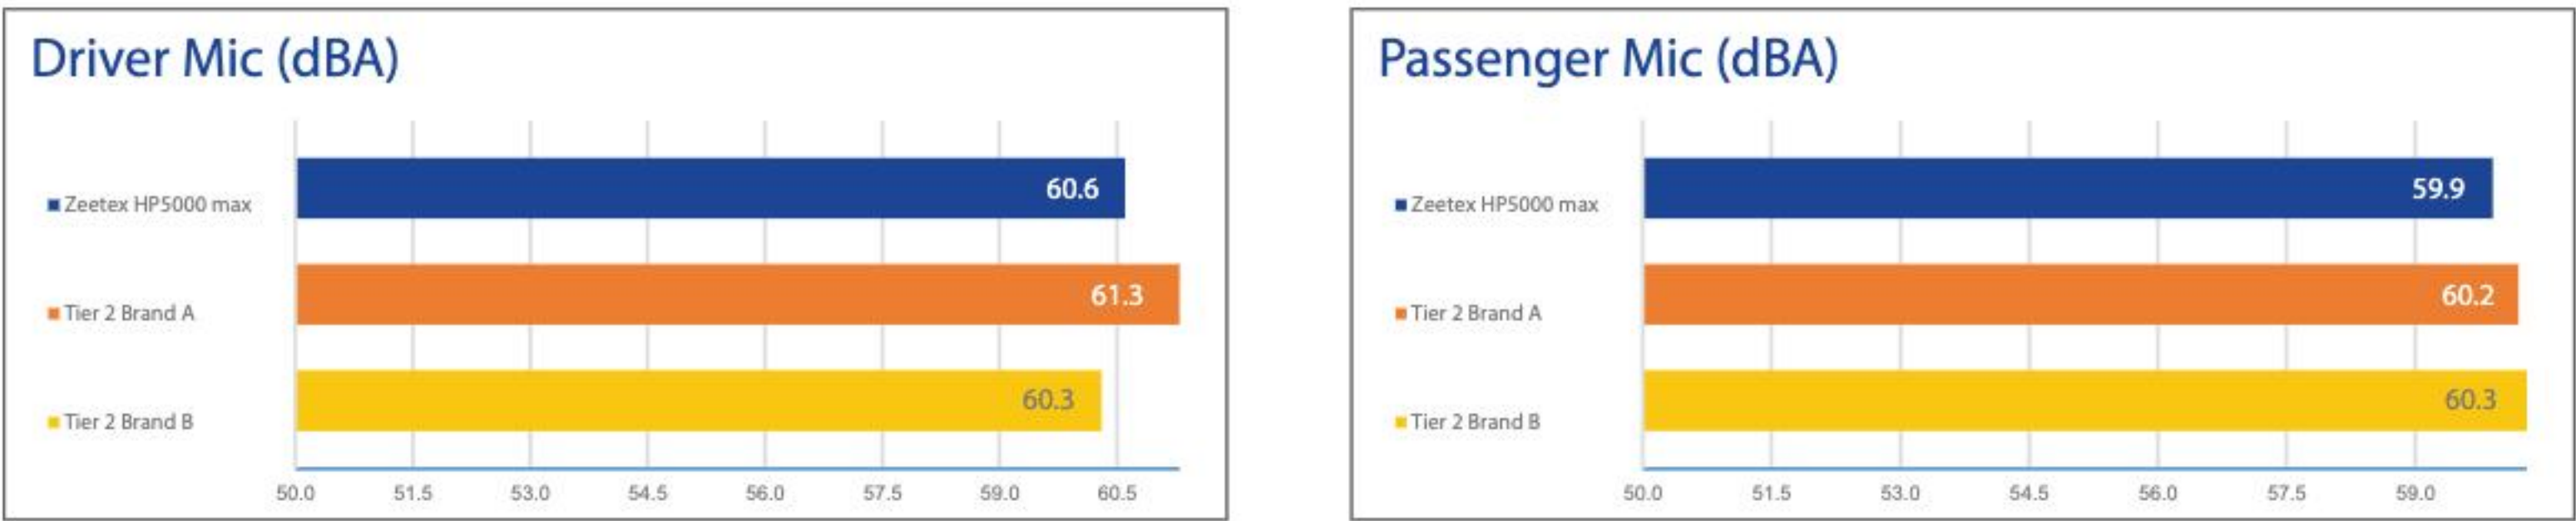


Internal Noise on Rough Road @ 60Km/h

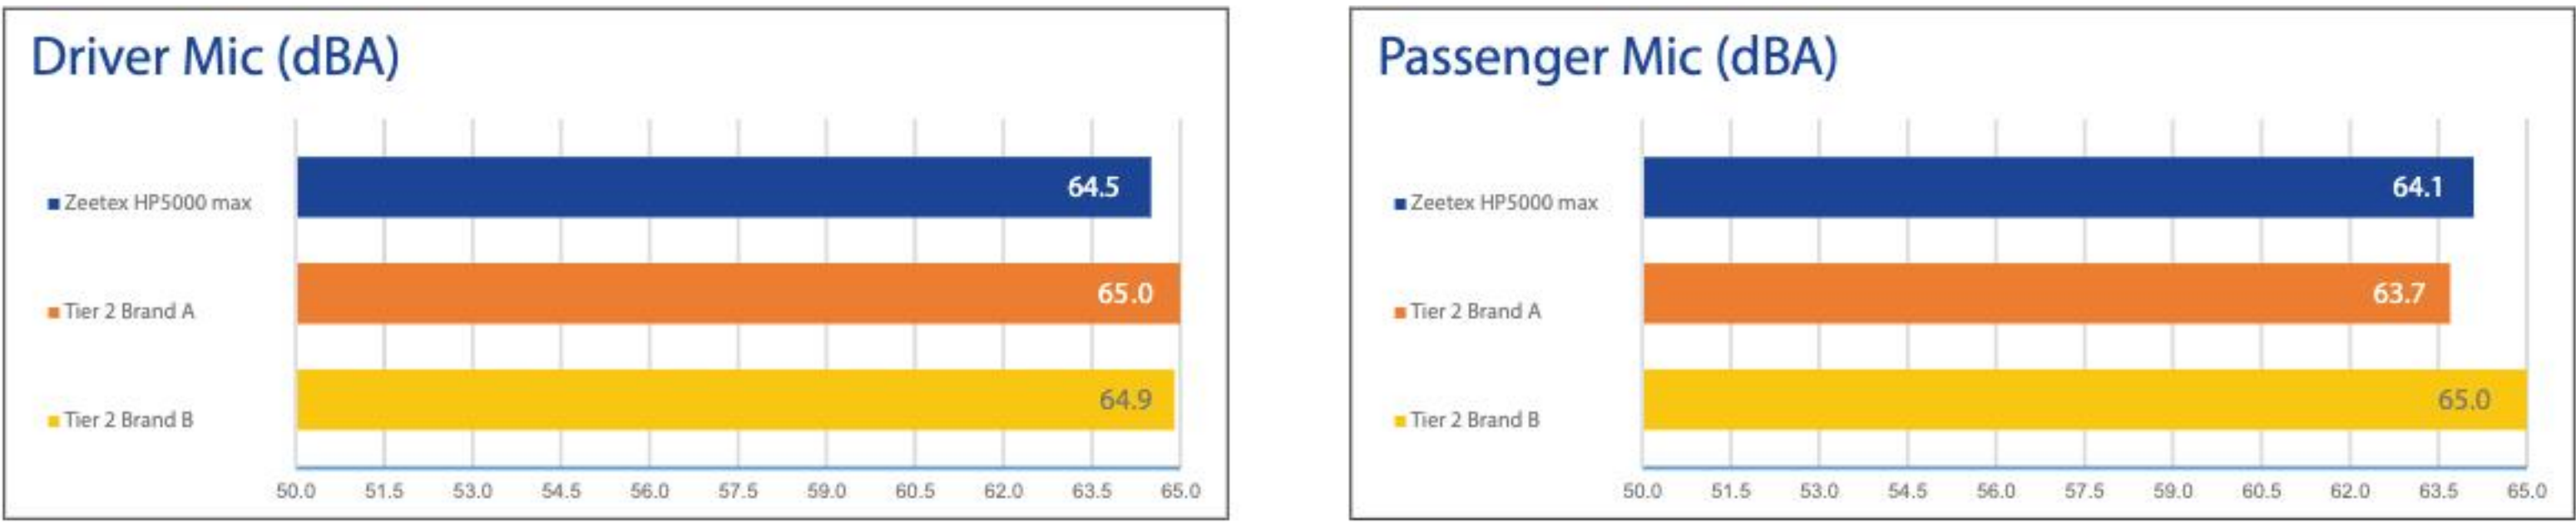


Internal Noise on Rough Road @ 80Km/h




Dry Braking Distance in Meters

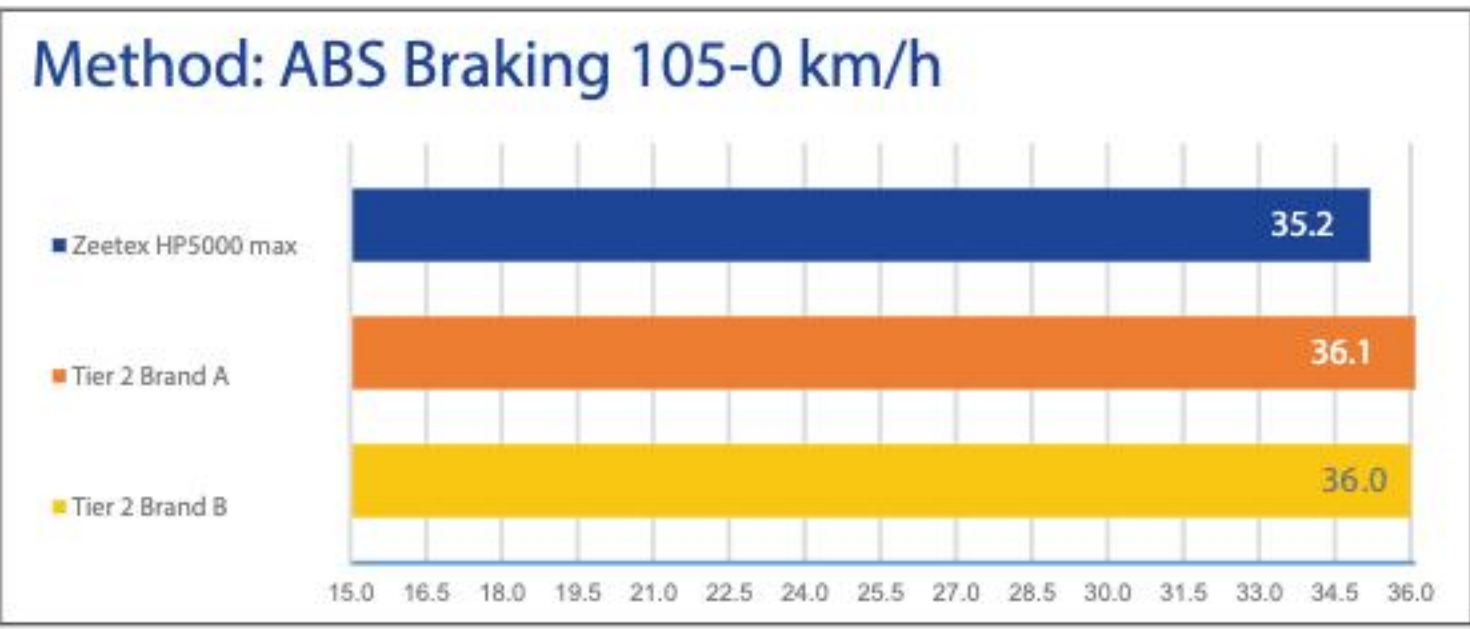

Dry Handling

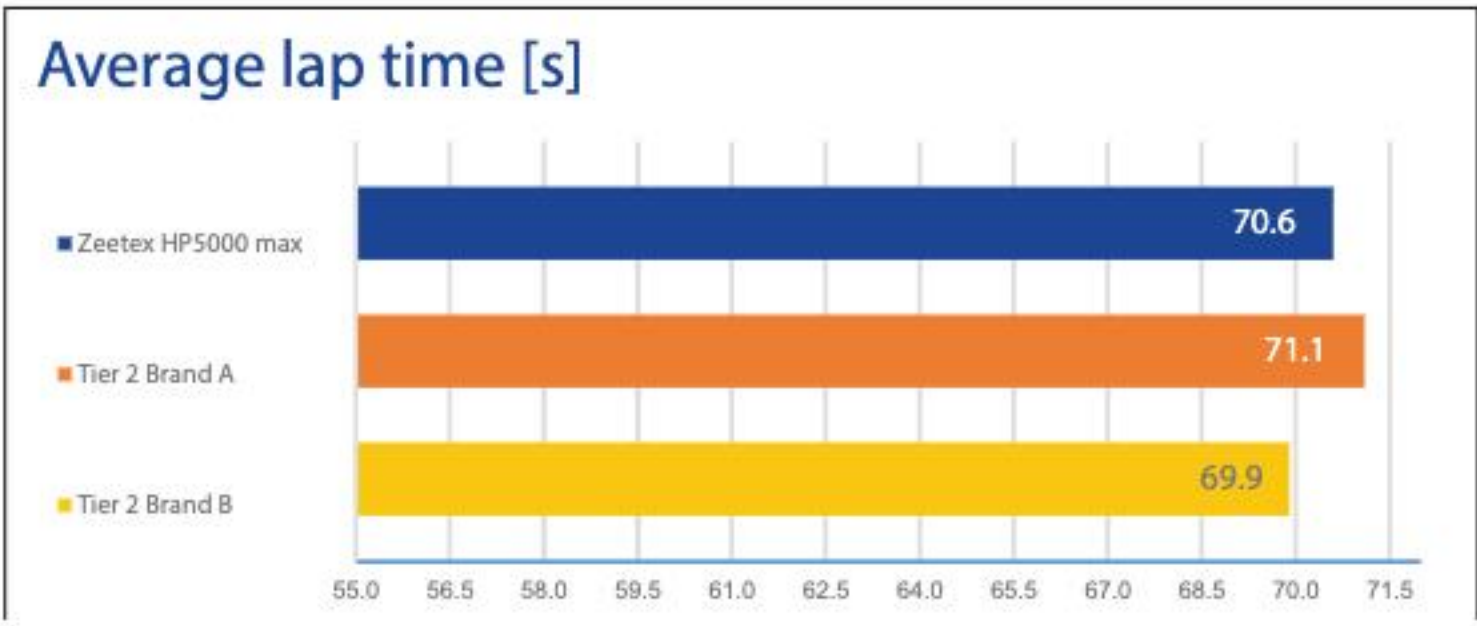

Wet Handling

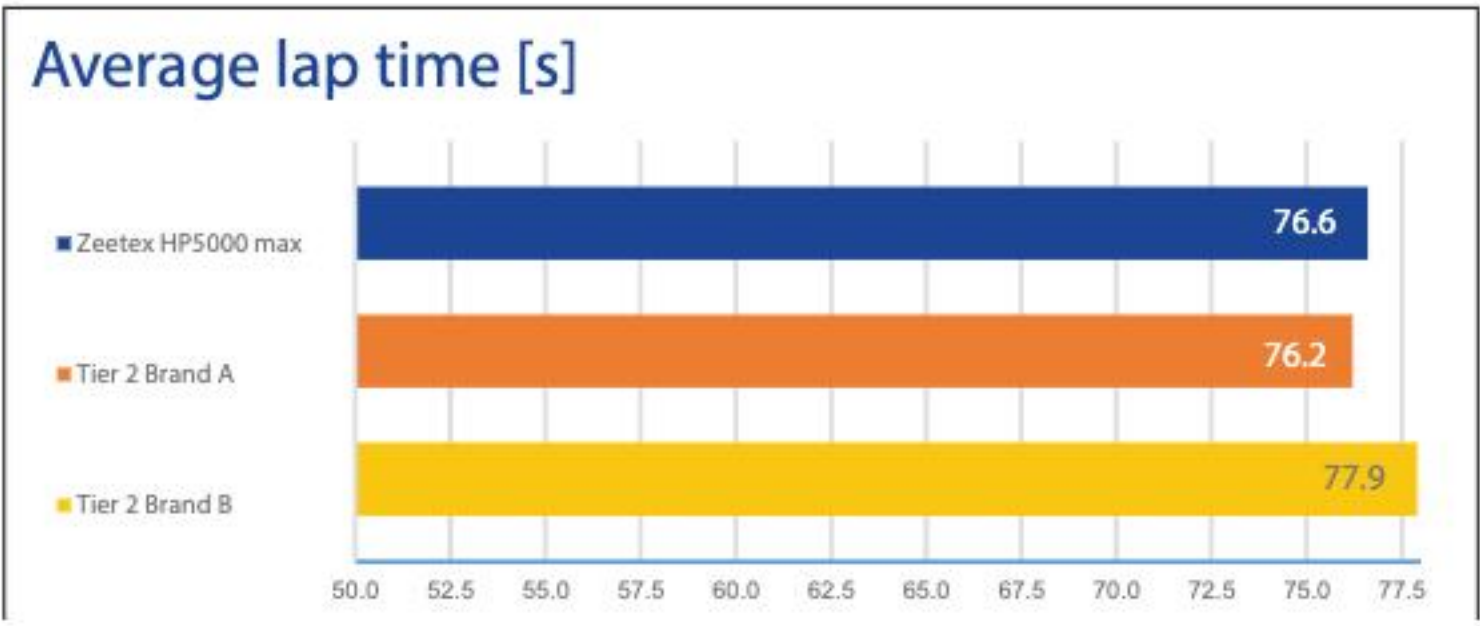



HT5000 max

THE NEXT-GEN HIGHWAY TERRAIN TIRE

For 4x4's on Highway Terrain

SUMMER RANGE UTQG 500 A A

HT5000 max

This next-gen highway terrain tire is a trendsetter that features a unique asymmetrical pattern and a distinct sidewall design uncommon for a 4x4 tire. The HT5000 max is designed to maximize stability and handling while offering extra grip and a silent drive.



A unique asymmetrical tread design with a distinct sidewall enhances the appearance of any 4x4 vehicle



Zig-zag, multi-waves and straight sipes increase grip on wet and dry roads



Four circumferential main grooves offer better stability and handling and reduce noise while driving on highways

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	245/75R16	111T	1090	44	7.0	248	769	8.5
	265/75R16	116T	1250	44	7.5	267	799	8.5
70 Series	215/70R16	100H	800	44	6.5	221	703	8.5
	225/70R16	103H	875	44	6.5	228	717	8.5
	235/70R16	106H	950	44	7.0	240	731	8.5
	245/70R16	111H XL	1090	50	7.0	248	745	8.5
	255/70R16	111H	1090	44	7.5	260	759	8.5
	265/70R16	112H	1120	44	8.0	272	773	8.5
	265/70R17	115H	1215	44	8.0	272	799	8.5
	255/70R18	113H	1150	44	7.5	260	810	8.5
	265/70R18	116H	1250	44	8.0	272	829	8.5
65 Series	245/65R17	111H XL	1090	50	7.0	248	745	8.5
	265/65R17	112H	1120	44	8.0	272	771	8.5
	275/65R17	115H	1215	44	8.0	279	790	8.0
	285/65R17	116H	1250	44	8.5	292	802	8.3
	265/65R18	114H	1180	44	8.0	272	796	8.5

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For 4x4's on Highway Terrain

SUMMER RANGE UTQG 500 A A

HT5000 max



This next-gen highway terrain tire is a trendsetter that features a unique asymmetrical pattern and a distinct sidewall design uncommon for a 4x4 tire. The HT5000 max is designed to maximize stability and handling while offering extra grip and a silent drive.





Performance results against Tier 2 brands tested in IDIADA, Spain

Tire size tested: 265/65R17 112H



Internal Noise on Smooth Road @ 60Km/h

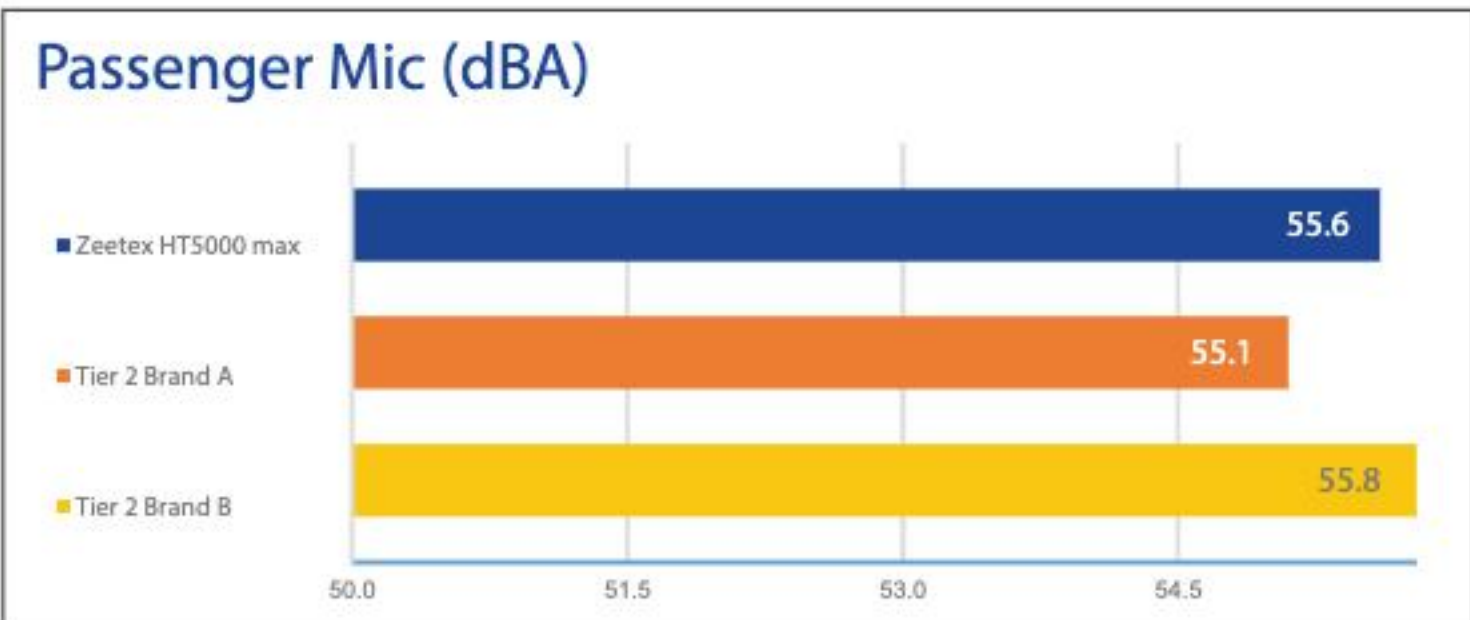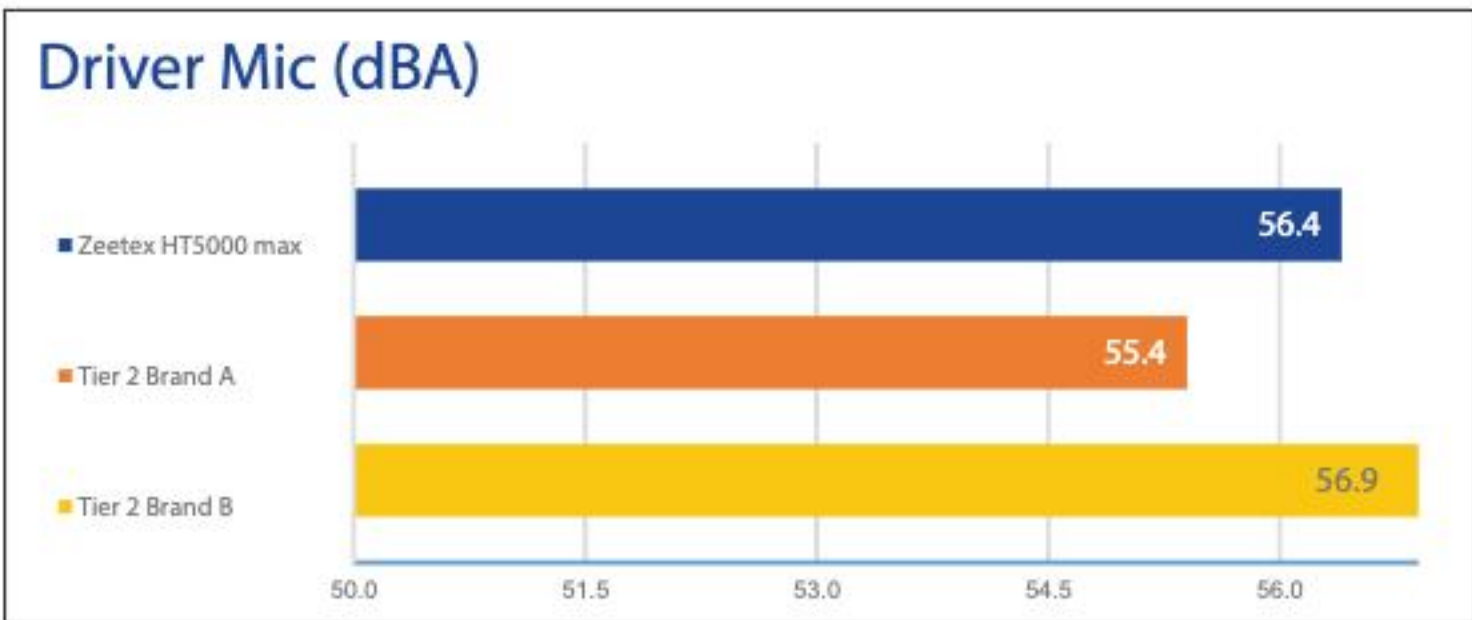



Internal Noise on Smooth Road @ 80Km/h

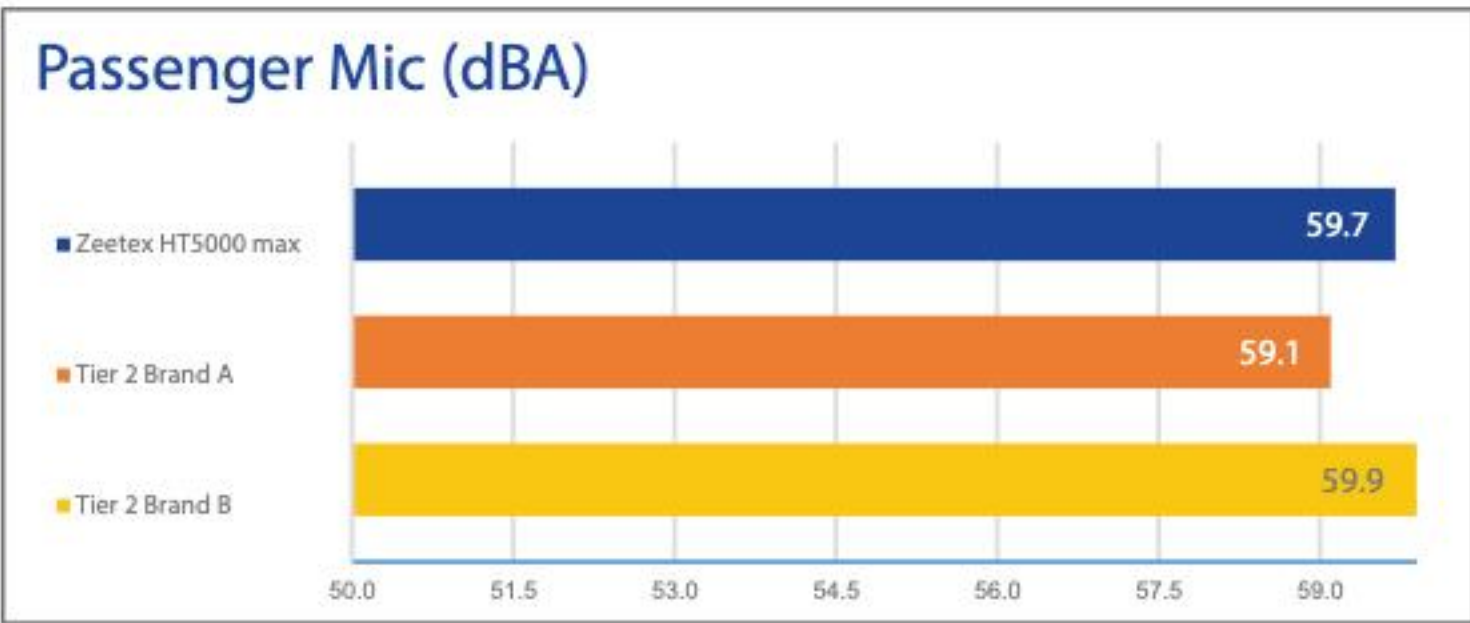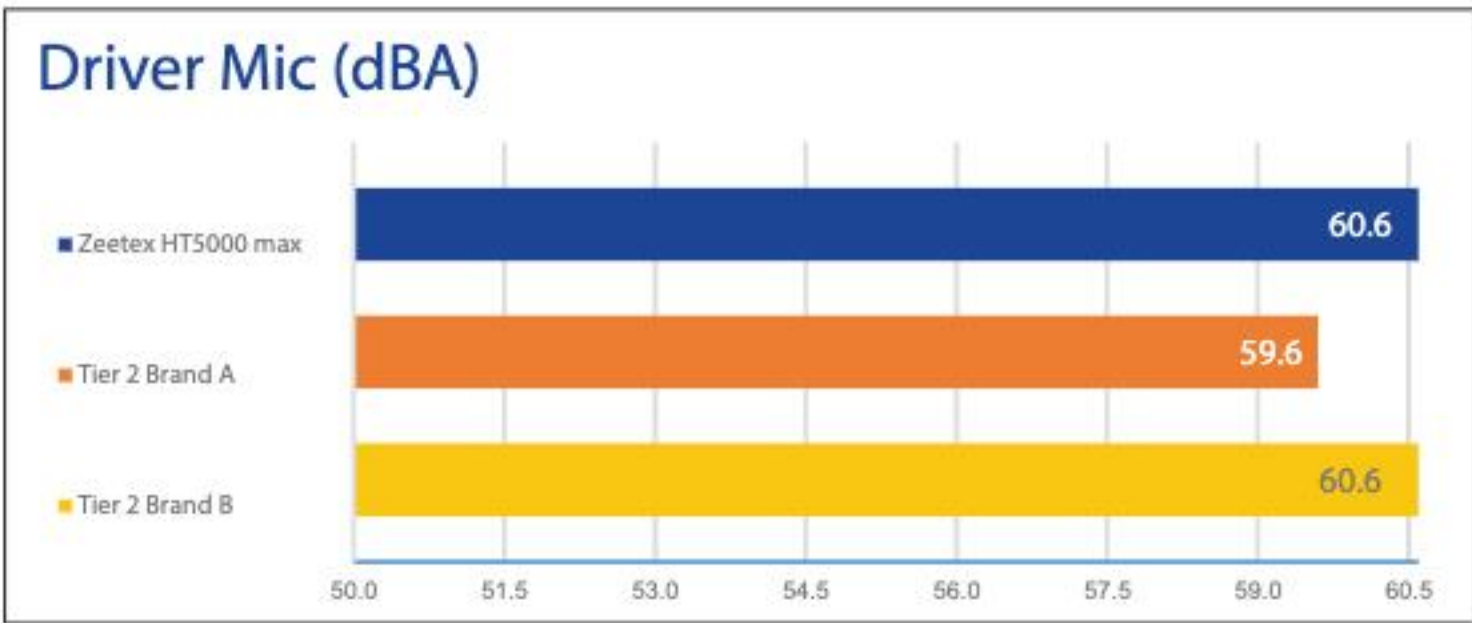


Internal Noise on Rough Road @ 60Km/h

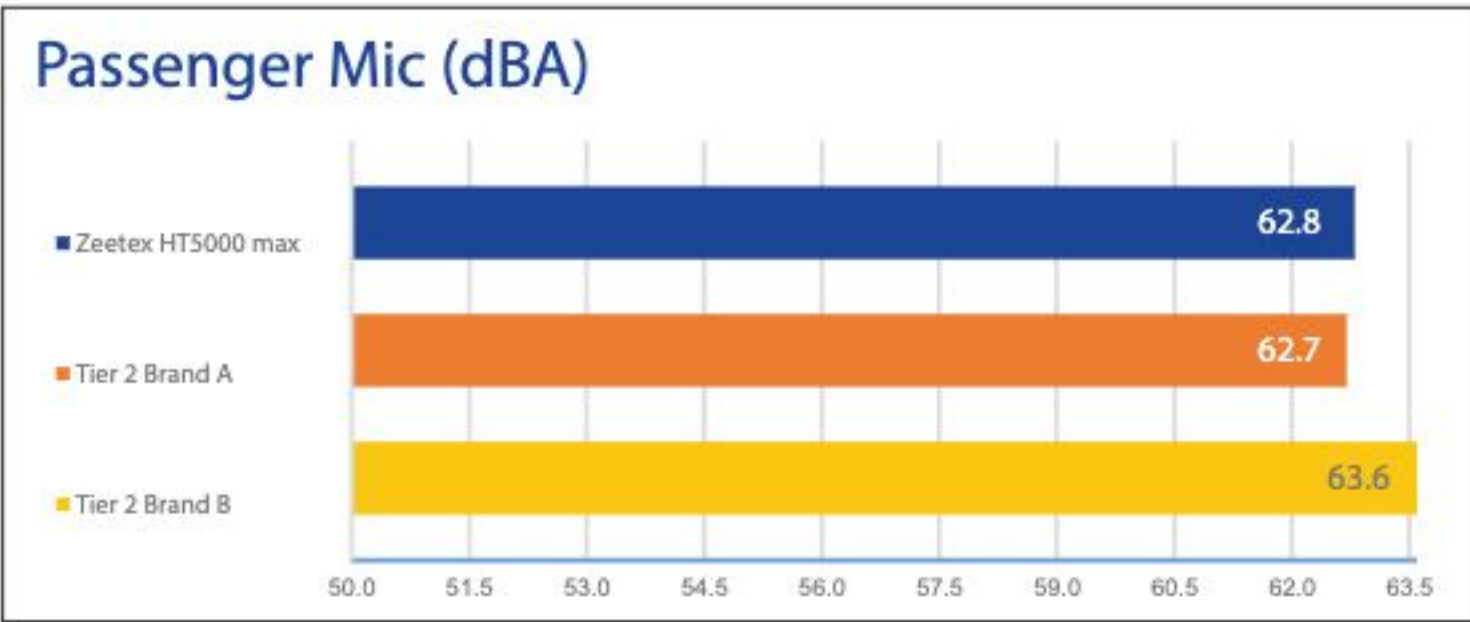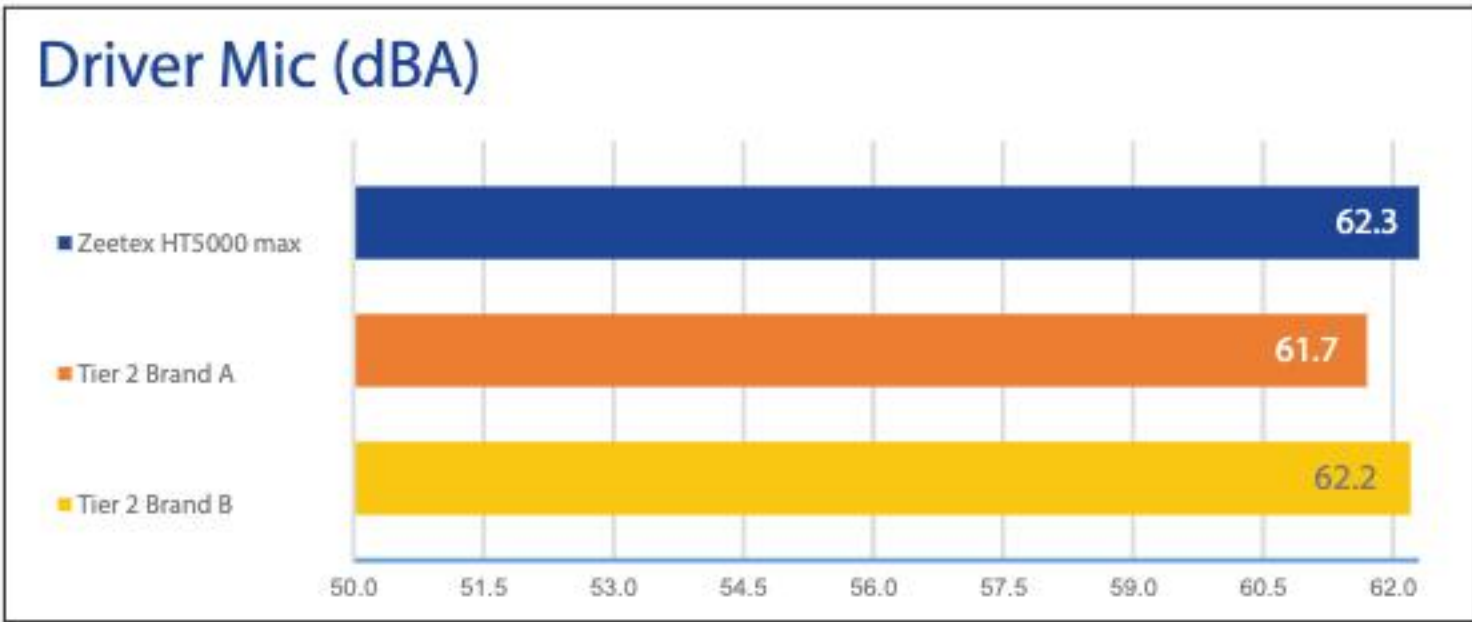


Internal Noise on Rough Road @ 80Km/h

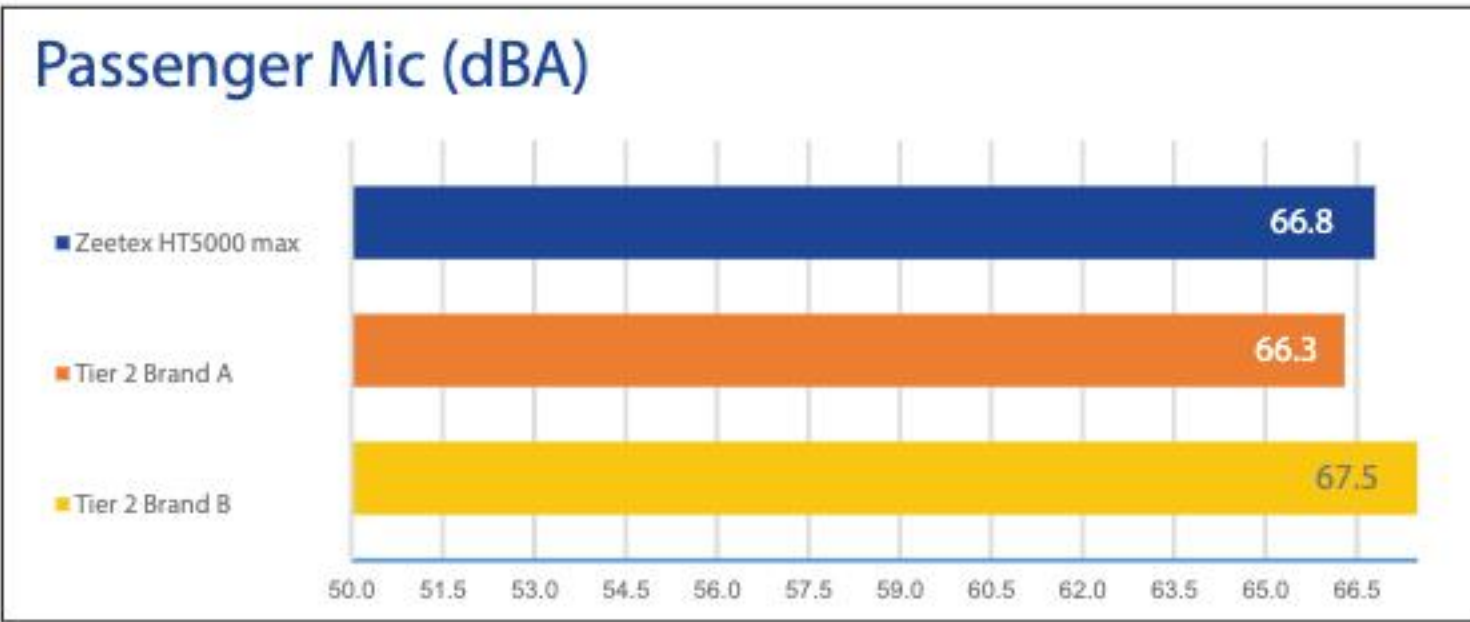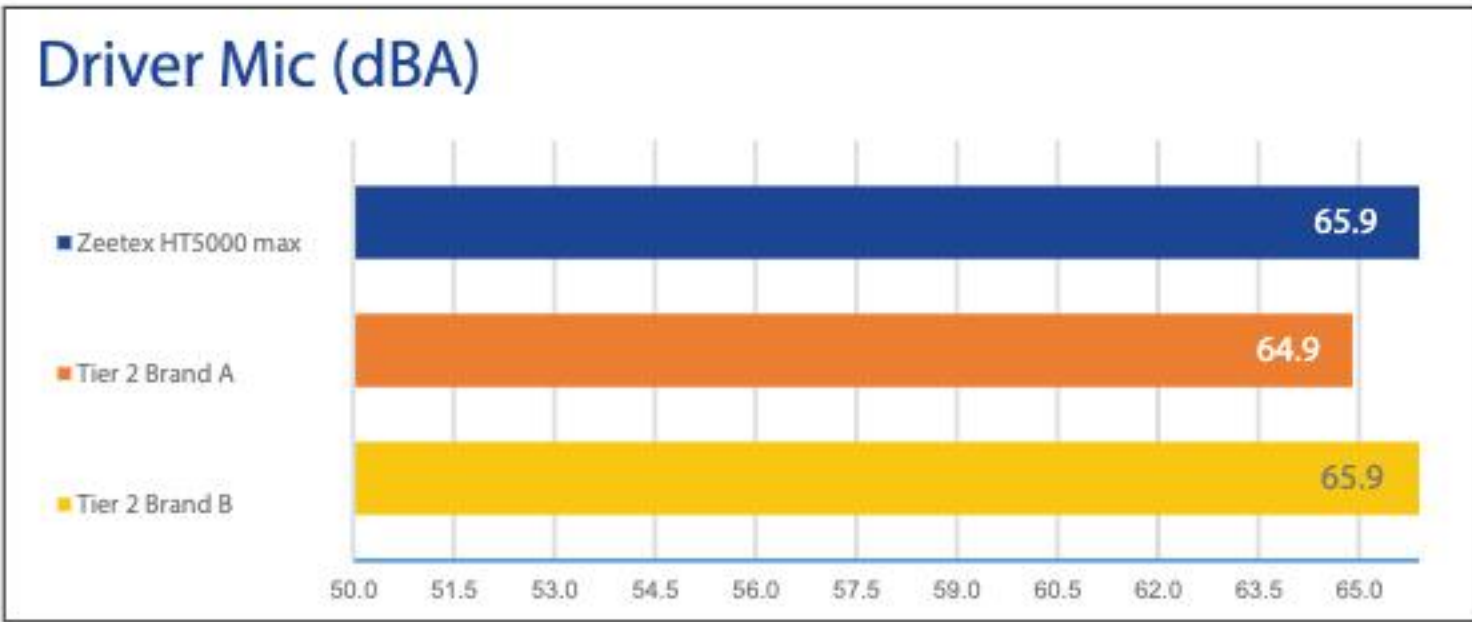

Dry Braking Distance in Meters

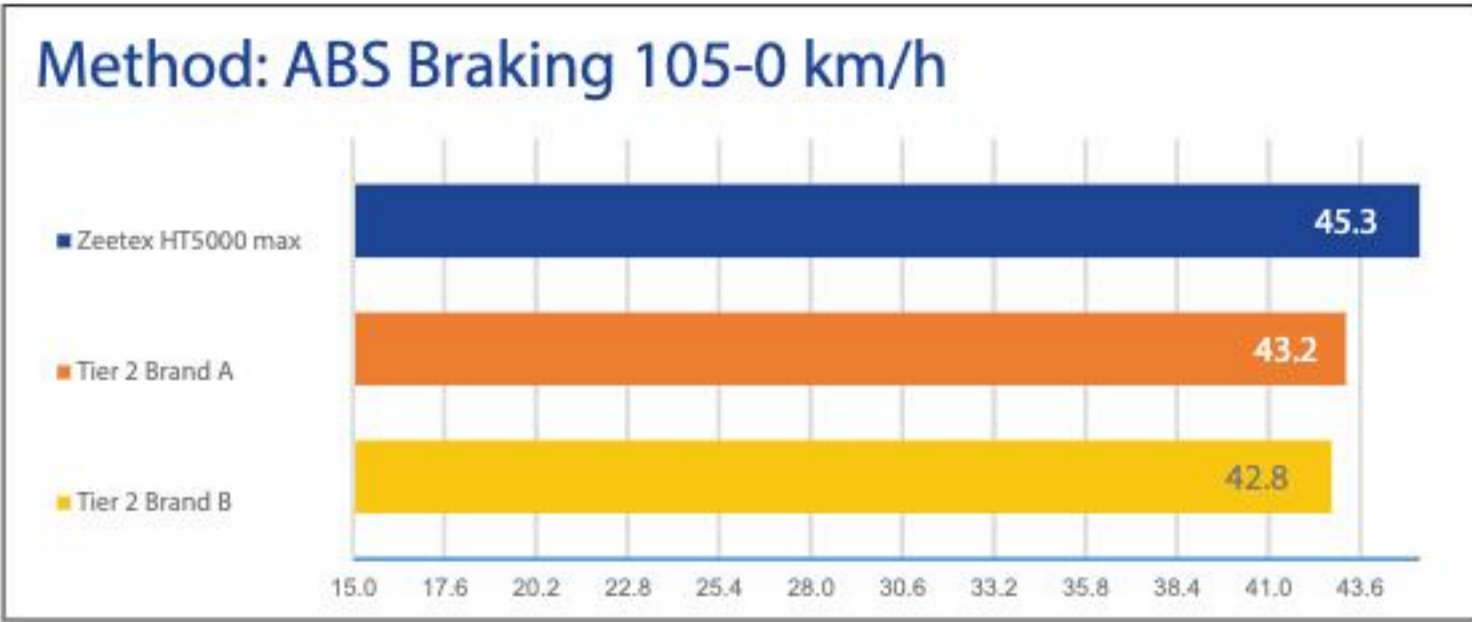

Dry Handling

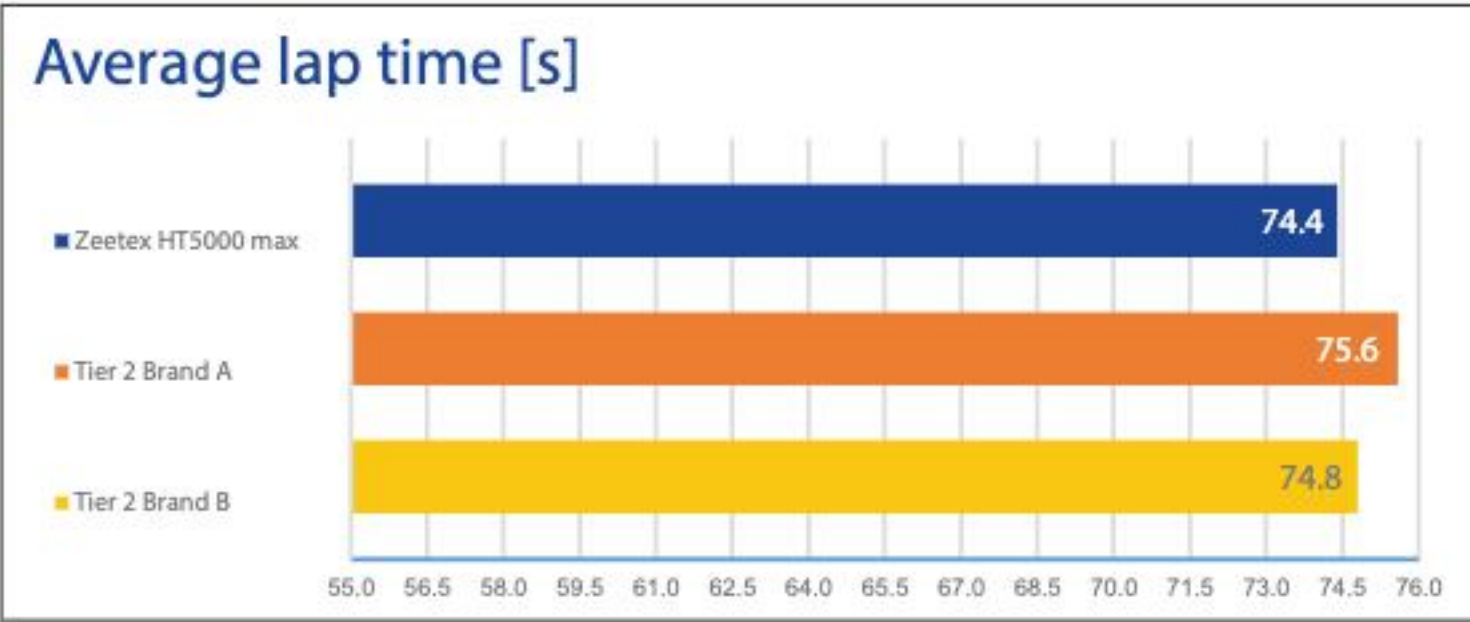



SU5000 max

THE NEXT-GEN SUV TIRE

For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 440 A A

SU5000 max

The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Positioning of extra wide ribs with four main grooves enhance road contact area for better performance and fuel efficiency



Impressively engineered with a modern sipe style and positioning for a quiet and comfortable drive



Sporty aesthetic and performance delivers a striking aesthetic seen on modern SUVs & Crossovers

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
65 Series	225/65R17	102H	850	44	6.5	230	719	8.0
	235/65R17	108V XL	1000	50	7.0	240	733	8.0
	275/65R18	116H	1250	44	8.0	279	810	8.0
60 Series	205/60R17*	97W XL	730	50	6.0	209	678	7.8
	235/60R17	102V	850	44	7.0	240	709	8.0
	235/60R18	103V	875	44	7.0	240	734	8.0
	245/60R18	105V	925	44	7.0	248	751	8.0
	255/60R18	112W XL	1120	50	7.5	260	763	8.0
	265/60R18	110V	1060	44	8.0	272	770	8.0
	285/60R18	116V	1250	44	8.5	310	799	9.0
	275/60R20	115V	1215	44	8.0	279	833	9.0
55 Series	215/55R18	99V XL	775	50	7.0	226	693	7.8
	215/55R18*	99W XL						
	225/55R18*	102Y XL	850	50	7.0	233	700	8.0
	225/55R18*	98V						
	235/55R18	104Y XL	900	50	7.5	245	710	8.0
	255/55R18	109Y XL	1030	50	8.0	265	732	8.0
	225/55R19*	103Y XL	875	50	7.0	233	731	8.0
	235/55R19	105Y XL	925	50	7.5	245	736	8.0
	255/55R19	111W XL	1090	50	8.0	265	763	8.0
	275/55R19	111W	1090	44	8.5	304	780	8.3
	235/55R20	102W	850	44	7.5	245	761	8.0
	255/55R20	110Y XL	1060	50	8.0	265	783	8.0
	265/55R20*	113V XL	1150	50	8.5	287	798	8.0
	275/55R20	117V XL	1285	50	8.5	290	805	9.0
50 Series	235/50R19	103W XL	875	50	7.5	245	719	8.0
	255/50R19	107W XL	975	50	8.0	265	734	8.0
	265/50R19	110Y XL	1060	50	8.5	277	744	8.0
	245/50R20	105W XL	925	50	7.5	253	749	8.0
	255/50R20	109Y XL	1030	50	8.0	265	759	8.0
	265/50R20	111V XL	1090	50	8.5	277	769	8.0
	275/50R20	113W XL	1150	50	8.5	301	779	8.3
	285/50R20	116V XL	1250	50	9.0	297	794	9.0

* Newly added size

For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 440 A A

SU5000 max

The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
50 Series	275/50R21	113Y	XL	1150	50	8.5	284	809	8.3
	275/50R22	115V	XL	1215	50	8.5	284	830	8.3
45 Series	235/45R19*	99Y	XL	775	50	8.0	236	695	8.0
	245/45R20	103Y	XL	875	50	8.0	243	723	8.0
	255/45R20	105W	XL	925	50	8.5	268	734	8.0
	265/45R20	108Y	XL	1000	50	9.0	266	746	8.0
	275/45R20	110Y	XL	1060	50	9.0	273	751	8.3
	265/45R21*	108Y	XL	1000	50	9.0	266	766	8.0
	275/45R21	110Y	XL	1060	50	9.0	273	781	8.3
	285/45R22*	114W	XL	1180	50	9.5	285	815	9.0
40 Series	275/40R20	106Y	XL	950	50	9.5	278	728	8.0
	265/40R21	105Y	XL	925	50	9.5	282	740	8.0
	295/40R21	111Y	XL	1090	50	10.5	301	769	8.3
	265/40R22	106Y	XL	950	50	9.5	271	771	8.0
	275/40R22	108Y	XL	1000	50	9.5	278	779	8.3
	285/40R22	110Y	XL	1060	50	10.0	303	781	8.3
	305/40R22	114W	XL	1180	50	11.0	319	803	9.0
35 Series	315/35R20	110Y	XL	1060	50	11.0	320	728	9.0
	295/35R21	107Y	XL	975	50	10.5	301	739	8.3
	265/35R22	102Y	XL	850	50	9.5	271	740	8.0
	285/35R22	106Y	XL	950	50	10.0	297	758	8.3

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 440 A A

SU5000 max

The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Performance results against Tier 2 brands tested in IDIADA, Spain

Tire size tested: 245/45R20 103Y


Internal Noise on Smooth Road @ 60Km/h




Internal Noise on Smooth Road @ 80Km/h




Internal Noise on Rough Road @ 60Km/h

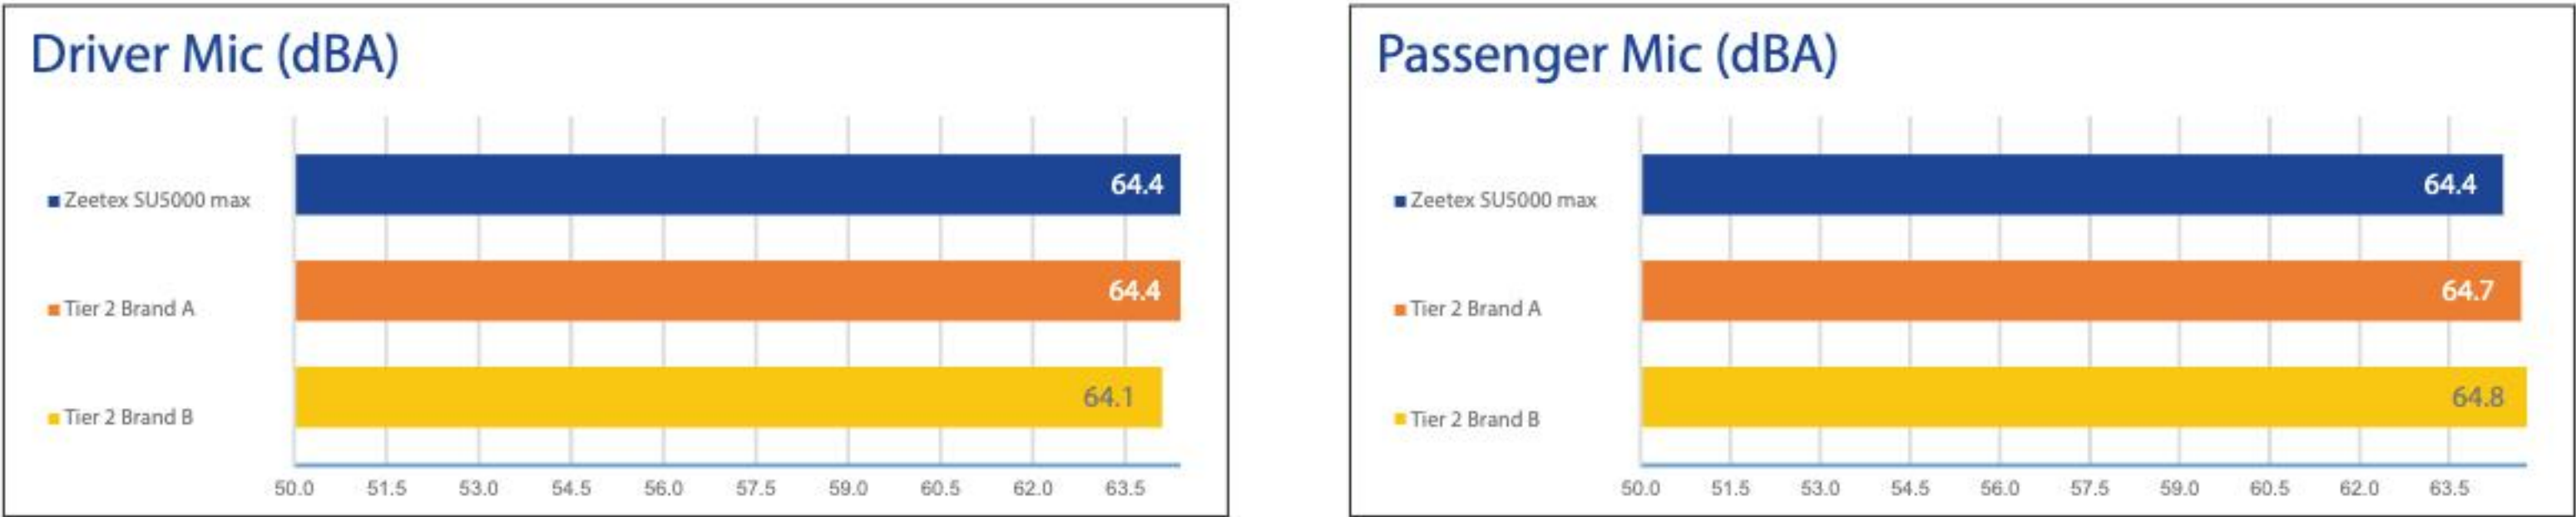


Internal Noise on Rough Road @ 80Km/h

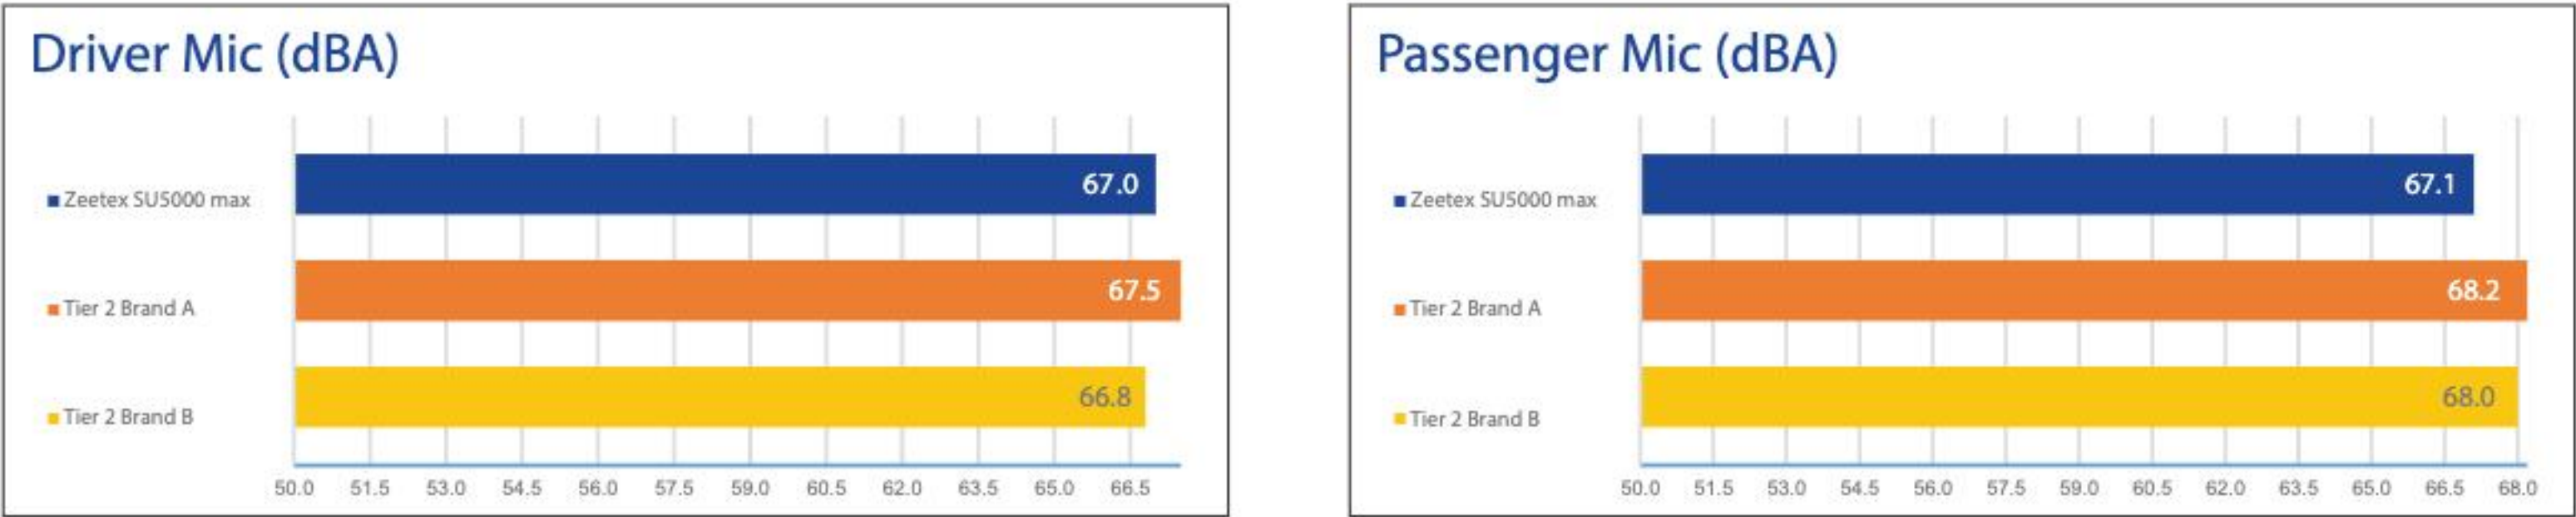


Dry Braking Distance in Meters

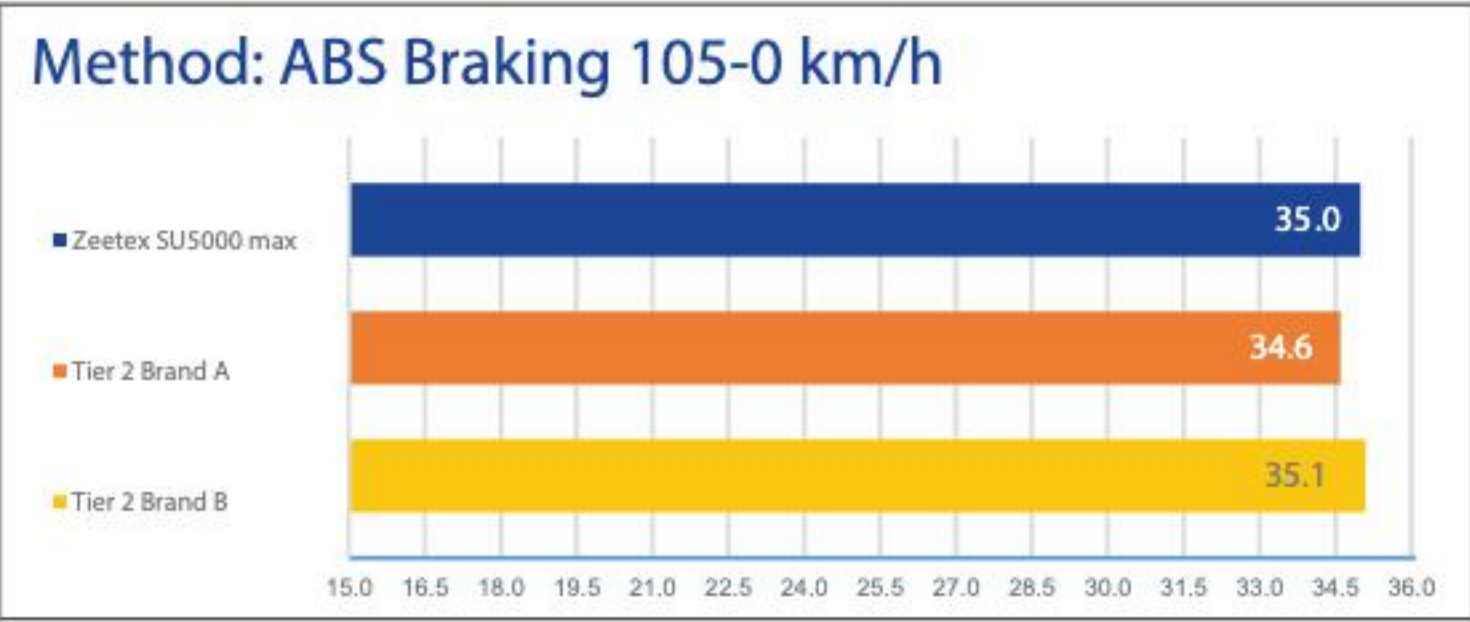

Dry Handling

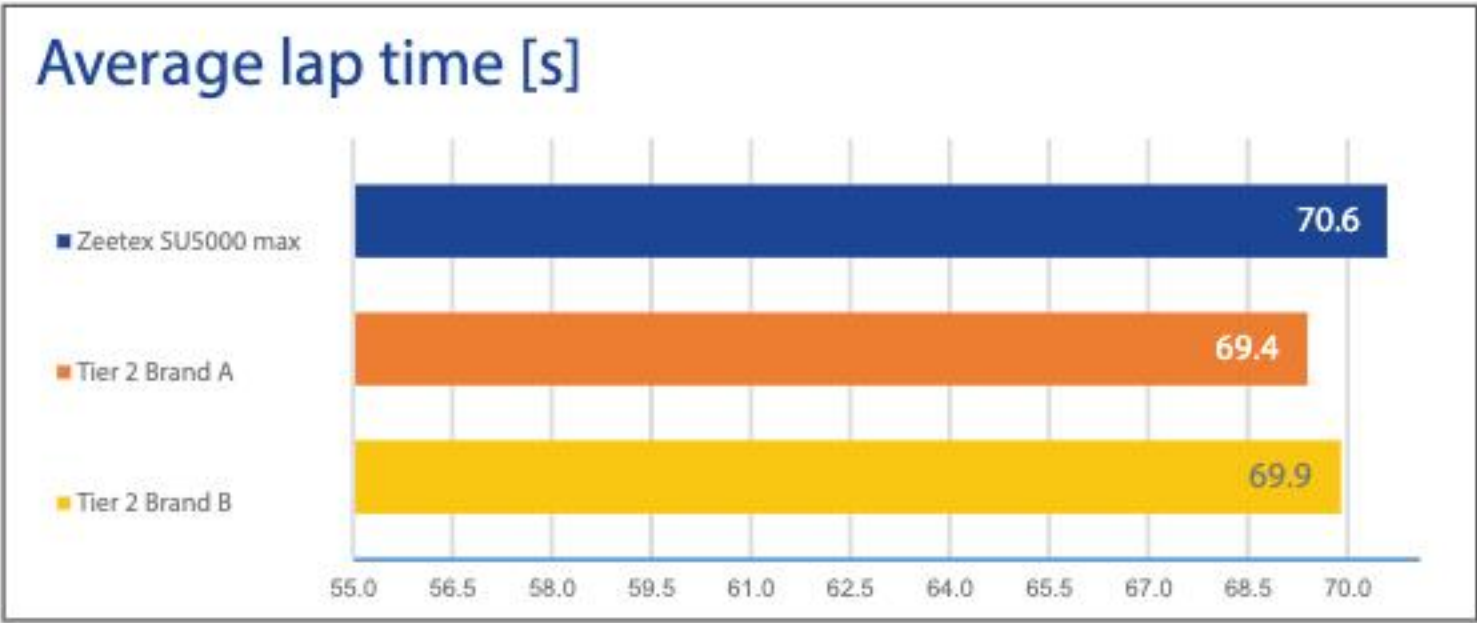

Wet Handling

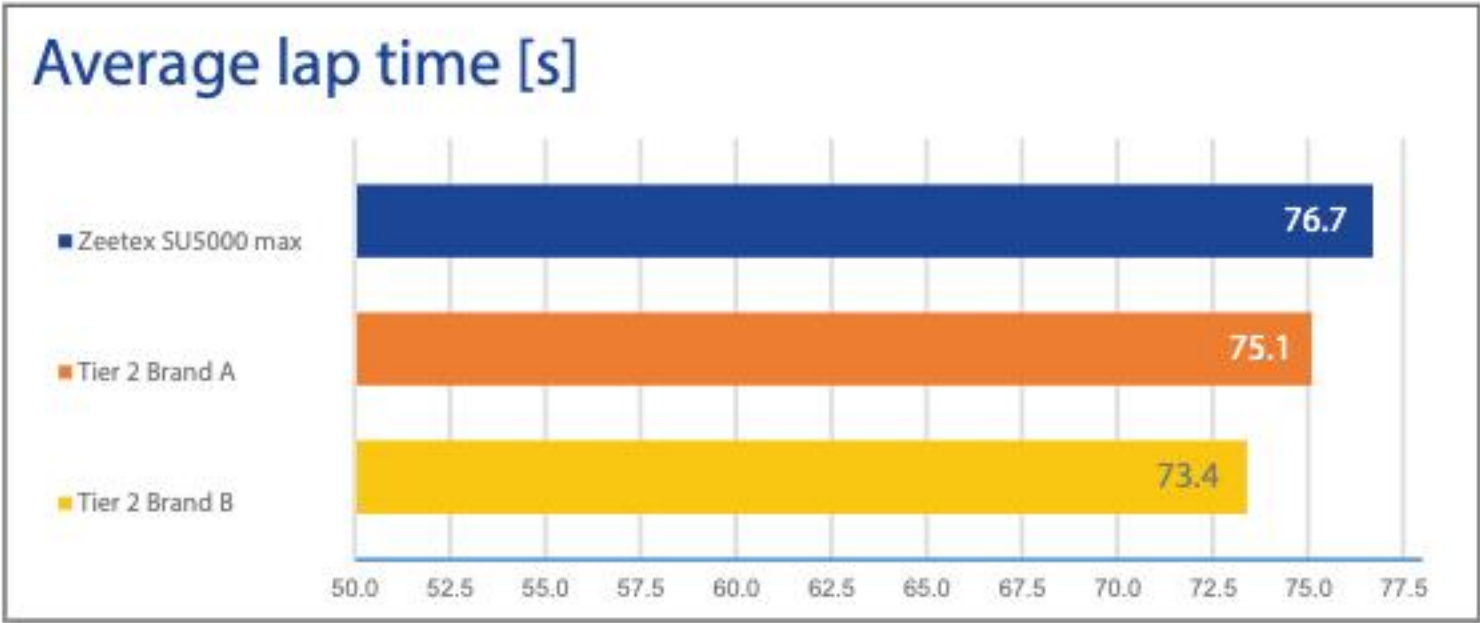


For Vans and Transport Vehicles

SUMMER RANGE

CT6000 eco



Rugged construction helps in withstanding challenging conditions in cargo transport

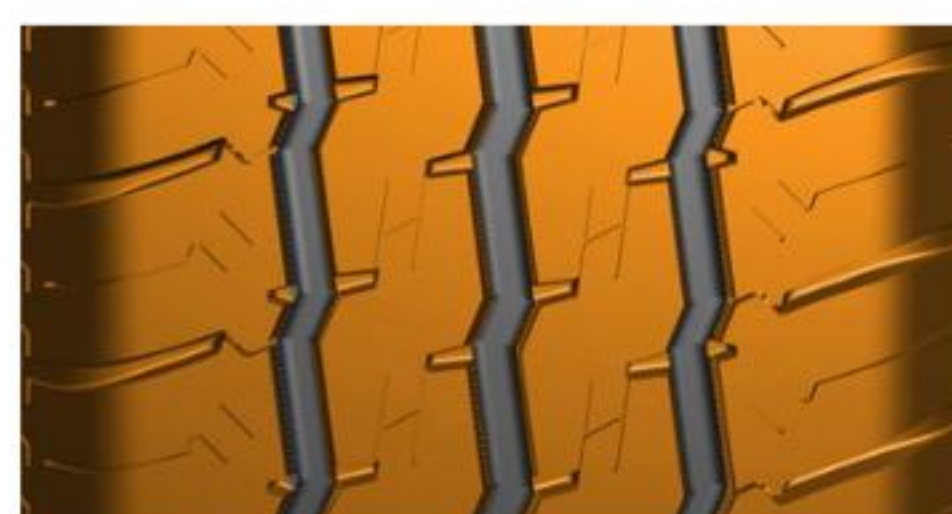

Specially designed tread pattern with shoulder lugs provides better cornering, stability & resistance against off-road abuse



Zig-zag circumferential grooves help in quicker water evacuation to overcome aquaplaning and providing extra-ordinary road grip in wet conditions

Series	Size	PR	Load & Speed Index	Maximum Load (Single)	Maximum Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
75 Series	185/75R16C	8	104/102T	900	850	69	5.0	184	684	8.0
	195/75R16C	8	107/105T	975	925	69	5.5	196	698	8.0
	205/75R16C	8	110/108T	1060	1000	69	5.5	203	714	8.0
	215/75R16C	8	113/111T	1150	1090	69	6.0	216	728	8.0
70 Series	175/70R14C	8	95/93T	690	650	54	5.0	177	602	8.0
	195/70R15C	8	104/102T	900	850	65	6.0	201	655	8.0
	205/70R15C*		106/104T	950	900	65	6.0	209	644	8.0
	215/70R15C	8	109/107T	1030	975	65	6.5	221	683	8.0
	225/70R15C	8	112/110T	1120	1060	65	6.5	228	697	8.0
65 Series	205/65R15C	6	102/100T	850	800	54	6.0	209	647	8.0
	215/65R15C*	8	104/102T	900	850	54	6.5	221	661	8.0
	195/65R16C	8	104/102T	900	850	69	6.0	201	660	8.0
	205/65R16C	8	107/105T	975	925	69	6.0	209	672	8.0
	215/65R16C	8	109/107T	1030	975	69	6.5	221	686	8.0
	225/65R16C	8	112/110T	1120	1060	69	6.5	228	698	8.0
	235/65R16C	8	115/113T	1215	1150	69	7.0	240	712	8.0
60 Series	215/60R16C*	8	103/101T	1000	950	69	6.5	221	664	8.0
	215/60R17C*	8	109/107T	1030	975	69	6.5	221	690	8.0
LTRC	185R14C	8	102/100T	850	800	65	5.5	189	652	8.0
	195R14C	8	106/104T	950	900	65	5.5	196	668	8.0

* Newly added sizes

Pattern availability may slightly vary based on country, please reach out to your account manager for details.


For Vans and Transport Vehicles

SUMMER RANGE


CT6001 eco



Wider tread design for excellent riding stability, which ensures safety and high mileage

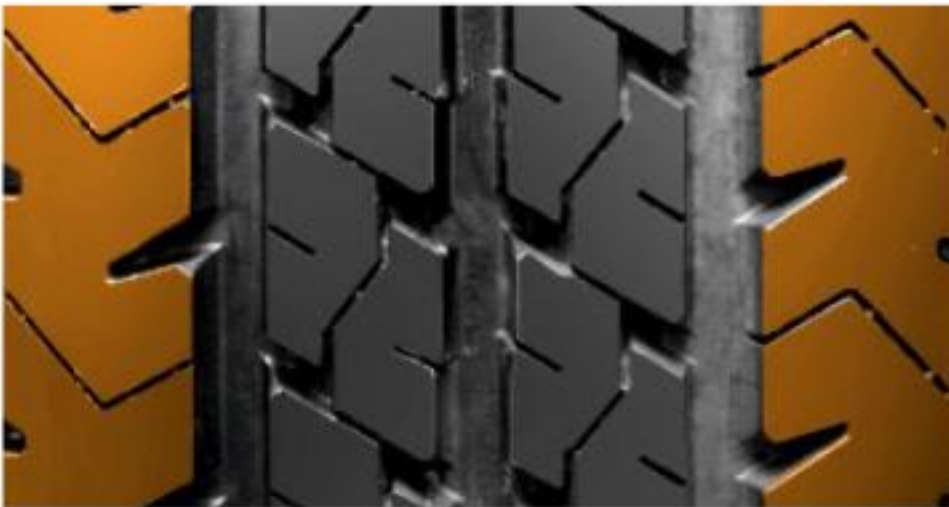

Optimal footprint due to wider shoulders' profile for enhanced stability

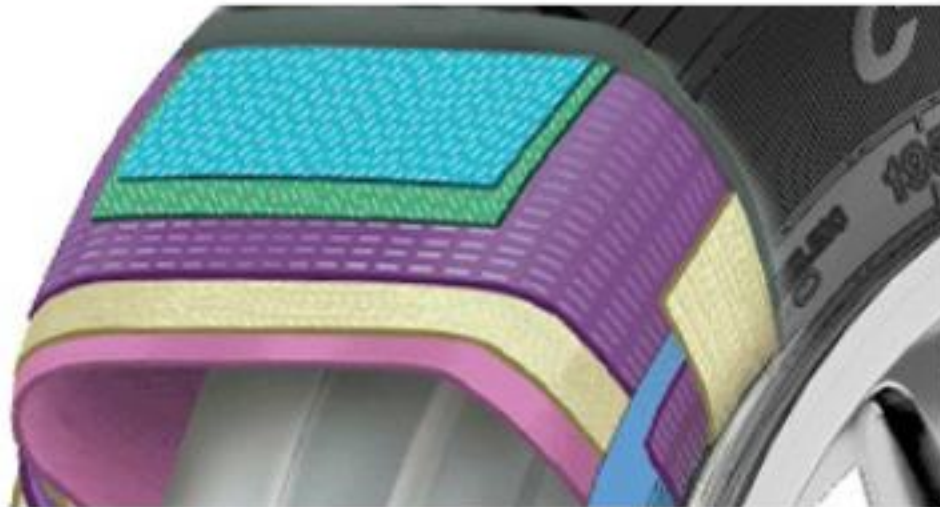

Heavy duty casing construction that can withstand overload; stone ejectors to prevent casing damage


Series	Size	PR	Load & Speed Index	Maximum Load (Single)	Maximum Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
LTRC	195R15C	8	106/104R	920	875	65	5.5	196	693	9.0

Pattern availability may slightly vary based on country, please reach out to your account manager for details.


For High-performance and Luxury Vehicles

SUMMER RANGE UTQG420 A A

HP6000 eco

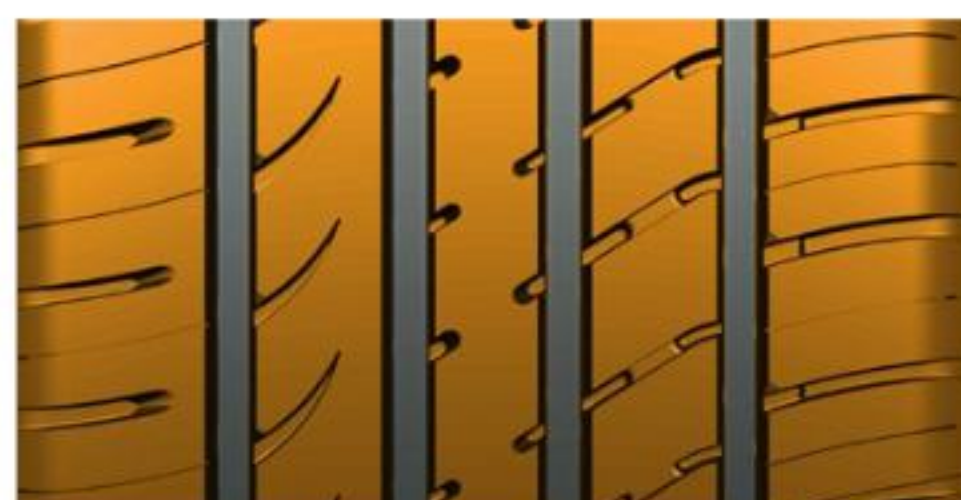

Serrations on the groove wall reduce pipe resonance, delivering an exceptionally silent ride

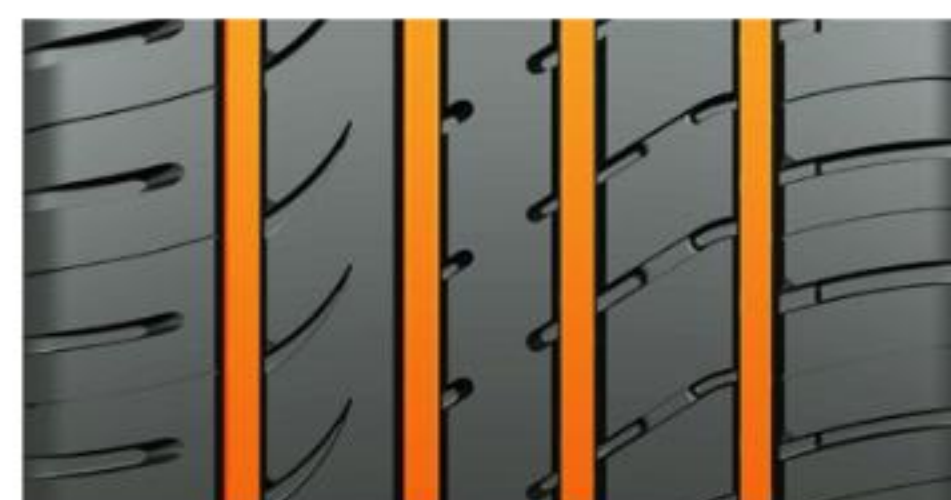

Absorption of road inputs delivers extra-ordinary driving comfort



Improved vehicle stability & reduced braking distance in wet & dry conditions

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
65 Series	205/65R16*	95H	690	44	6.0	209	672	8.2
60 Series	215/60R17	96H	710	44	6.5	221	690	8.2
	225/60R17	99H	775	44	6.5	228	702	8.2
	235/60R18	103H	875	44	7.0	240	739	8.2
55 Series	205/55ZR16	91W	600	44	6.5	214	632	7.6
	215/55R16	97V XL	725	49	7.0	226	642	7.6
	225/55ZR16	95W	775	51	7.0	266	654	7.6
	205/55ZR17	95W XL	690	49	6.5	214	658	7.6
	215/55ZR17	98W XL	750	51	7.0	226	668	7.6
	225/55ZR17	101W XL	825	51	7.0	233	680	7.6
	235/55ZR17	103W XL	775	44	7.5	245	690	7.6
	215/55ZR18	99W XL	775	49	7.0	226	693	7.6
	225/55R18	98V	750	44	7.0	233	705	7.6
	235/55ZR18	104W XL	900	49	7.5	245	715	7.6
	235/55ZR19	101W	825	44	7.5	245	741	7.6
	245/55ZR19*	103W	875	44	7.5	253	753	7.6
	235/55ZR20*	105W XL	925	49	7.5	245	766	7.6
50 Series	195/50R16	88V XL	500	44	6.0	201	602	7.6
	205/50ZR16	91W XL	545	44	6.5	214	612	7.6
	205/50ZR17	93W XL	650	49	6.5	214	638	7.6
	215/50ZR17	95W XL	615	44	7.0	226	648	7.6
	225/50ZR17	98W XL	750	51	7.0	233	658	7.6
	235/50ZR18	101W XL	825	51	7.5	245	693	7.6
	245/50R18*	104W XL	900	49	7.5	253	703	7.6
	255/50ZR19	107W XL	975	49	8.0	265	739	7.6
	265/50R19*	110W XL	1060	49	8.5	277	749	7.6
	245/50ZR20*	102W	925	49	7.5	253	754	7.6
	275/50R20*	113W XL	1150	49	8.5	284	784	7.6
	205/45ZR16	87W XL	545	49	7.0	206	590	7.6
45 Series	205/45ZR17	88W XL	560	49	7.0	206	616	7.6
	215/45ZR17	91W XL	615	51	7.0	213	626	7.6
	225/45ZR17	94Y XL	670	49	7.5	225	634	7.6
	235/45ZR17	97W XL	730	51	8.0	236	644	7.6
	245/45ZR17	99W XL	775	51	8.0	243	652	7.6

* Newly added size

For High-performance and Luxury Vehicles

SUMMER RANGE UTQG420 A A

HP6000 eco



Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
45 Series	215/45ZR18	93W	XL	650	49	7.0	213	651	7.6
	225/45ZR18	95Y	XL	690	49	7.5	225	659	7.6
	235/45ZR18	98W	XL	750	49	8.0	236	669	7.6
	245/45ZR18	100Y	XL	800	51	8.0	243	677	7.6
	225/45ZR19*	92W		630	44	7.5	225	685	7.6
	245/45ZR19	102W	XL	850	49	8.0	243	703	7.6
	245/45ZR20	103W	XL	875	49	8.0	243	728	7.6
	275/45ZR21	110W	XL	1060	49	9.0	273	781	7.6
40 Series	205/40ZR17	84W	XL	500	51	7.5	212	596	7.6
	225/40ZR18	92Y	XL	630	51	8.0	230	637	7.6
	235/40ZR18	95Y	XL	690	51	8.5	241	645	7.6
	245/40ZR18	97Y	XL	730	51	8.5	248	653	7.6
	255/40ZR18	99W	XL	775	49	9.0	260	661	7.6
	225/40ZR19	93W	XL	650	49	8.0	230	663	7.6
	235/40ZR19	96W	XL	710	49	8.5	241	671	7.6
	245/40ZR19	98W	XL	750	49	8.5	248	679	7.6
	255/40ZR19	100Y	XL	800	49	9.0	260	687	7.6
	275/40ZR19	105W	XL	925	49	9.5	278	703	7.6
	275/40ZR20*	106W	XL	950	51	9.5	278	728	7.6
	295/40ZR21*	111W	XL	1090	49	10.5	301	769	7.6
35 Series	215/35ZR18*	84W	XL	500	49	7.5	218	607	7.6
	265/35ZR18	97W	XL	730	49	9.5	271	643	7.6
	235/35ZR19	91W	XL	615	49	8.5	241	647	7.6
	245/35ZR19	93W	XL	650	49	8.5	248	655	7.6
	255/35ZR19*	96W	XL	710	49	9.0	260	661	7.6
	275/35ZR19	100W	XL	800	49	9.5	278	675	7.6
30 Series	275/30ZR20	97W	XL	730	49	9.5	278	674	7.6

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For 4x4's on Highway Terrain

SUMMER RANGE UTQG 400 A A


HT6000 eco



Symmetrical tread design with large shoulders blocks for optimized footprint and increased stability



Four zigzag grooves offers enhanced handling and drive comfort

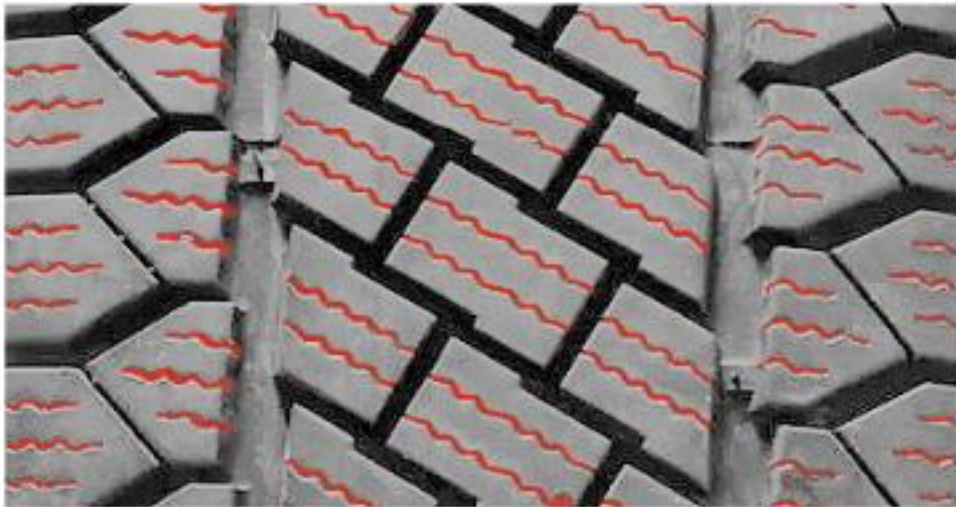

Multi-type sipes for optimal grip on different highway roads conditions


Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	245/70R17	108H	1000	44	7.0	248	776	9.0
	265/70R17	113H	1150	44	8.0	272	804	9.0
65 Series	225/65R17	102H	850	44	6.5	228	724	9.0
	245/65R17	105H	925	44	7.0	248	750	9.0
	265/65R17	110H	1060	44	8.0	272	776	9.0
	285/65R17	115H	1215	44	8.5	292	802	9.0
	275/65R18	114H	1180	44	8.0	279	815	9.0
55 Series	275/55R20	117H XL	1285	49	8.5	284	810	9.0

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For 4x4's on Highway Terrain

SUMMER RANGE UTQG 620 A B


HT6001 eco

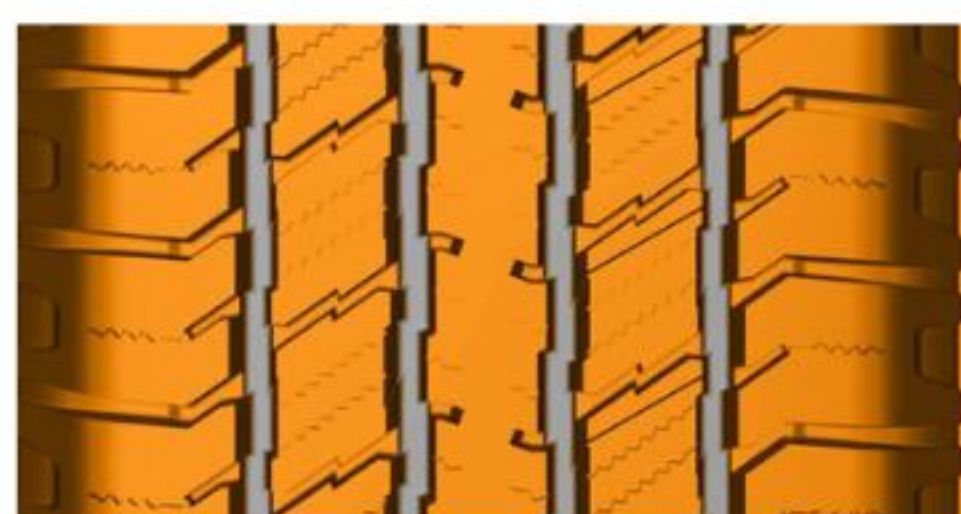

Optimized tread pattern
provide great ride comfort,
lower noise levels & handling
on the road



Solid center rib with optimal
provide steering stability
performance at high speed

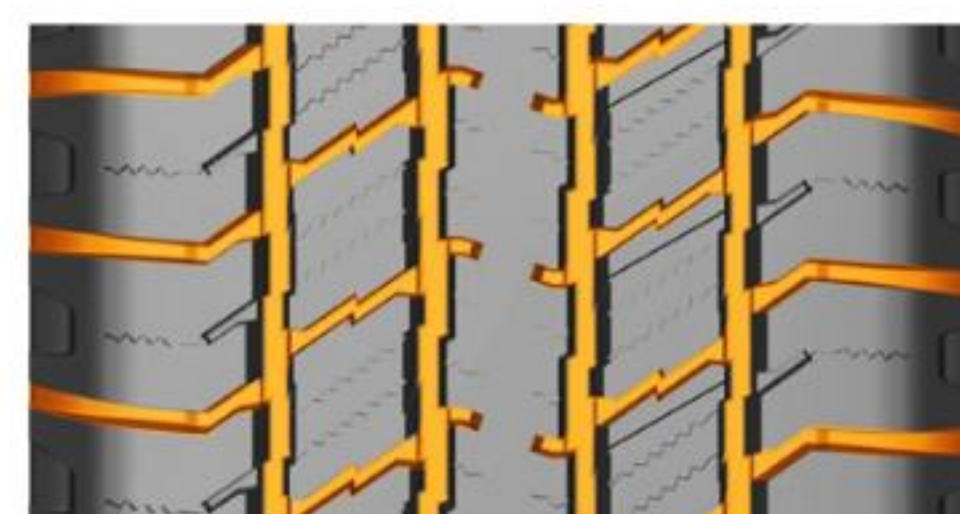

Wide open tread channels
to evacuate water rapidly for
better road grip

							P METRIC	
Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter
				kgs	psi	inches	mm	mm
75 Series	235/75R15	108T	XL	990	49	6.5	235	733
70 Series	225/70R16	103T		825	44	6.5	228	722
	245/70R16	111T	XL	1090	49	7.0	248	750
	255/70R16	109T		1030	44	7.5	260	764

									LT METRIC	
Series	Size	PR	Load & Speed Index	Maximum Load (Single)	Maximum Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
75 Series	LT 265/75R16*	10	123/120Q	1550	1400	80	7.5	267	804	12.0
	LT 285/75R16*	10	126/123Q	1700	1550	80	8.0	286	834	12.0
70 Series	LT 245/70R17*	10	119/116Q	1360	1250	80	7.0	248	776	12.0

* Newly added sizes

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For 4x4's on Mud Terrain

SUMMER RANGE

MT6000 eco



Aggressive tread blocks maintain great off-road traction & grip on mud and loose soil



Reinforced top sidewall with increased rubber thickness for optimal protection against critical sidewall failure zone and to improve the tear resistance



Cut & chip resistance tread rubber compound withstands off-road abuse while driving on extremely tough road conditions & mud terrains

Series	Size	PR	Load & Speed Index	Maximum Load (Single)	Maximum Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
75 Series	LT 265/75R16	10	123/120Q	1550	1400	80	7.5	267	804	16.5
	LT 285/75R16	10	126/123Q	1700	1550	80	8.0	286	834	16.5
70 Series	LT 265/70R17	10	121/118Q	1450	1320	80	8.0	272	778	16.5
	LT 285/70R17	10	121/118Q	1450	1320	80	8.5	292	832	16.5
Flotation	LT 33X12.50R17	8	114Q	1180	-	51	10.0	318	826	16.5
	LT 35X12.50R17	10	121Q	1450	-	65	10.0	318	877	16.5
	LT 35X12.50R18	10	123Q	1550	-	65	10.0	318	877	16.5

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

SU6000 eco



Optimized construction
& tread design ensure wider footprint thereby having unparalleled road contact providing overall driving safety and stability



Specially engineered
sipes on the inner ribs reduce rolling resistance



Shoulder and inner ribs
with wider grooves retain excellent dry and wet braking performance and very good handling properties

Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
60 Series	245/60R18*	105V		925	44	7.0	248	751	8.0
	285/60R18*	120V	XL	1400	49	8.5	292	799	8.0
	275/60ZR20*	116V	XL	1360	49	8.0	279	838	7.2
55 Series	255/55ZR18	109W	XL	1030	49	8.0	265	737	8.0
	225/55ZR19*	99W		775	44	7.0	265	763	7.4
	255/55ZR19*	107W		975	44	8.0	265	712	7.2
	275/55ZR20*	117W	XL	1285	49	8.5	284	810	7.2
50 Series	235/50ZR17*	100W	XL	800	49	7.5	245	668	7.2
	225/50ZR18*	99W	XL	775	49	7.0	233	683	7.2
	265/50ZR20	111W	XL	1090	49	8.5	277	774	8.0
	285/50R20*	116W	XL	1250	49	9.0	297	794	8.0
	275/50ZR21*	113W	XL	1150	49	8.5	284	809	7.2
45 Series	195/45R16*	84V	XL	500	49	6.5	195	582	7.2
	215/45ZR16*	90W	XL	600	49	7.0	213	600	7.2
	255/45ZR18*	103W	XL	875	49	8.5	255	687	7.4
	235/45ZR19*	99W	XL	775	49	8.0	243	703	7.2
	265/45ZR20*	108Y	XL	1000	49	9.0	266	746	7.2
	275/45ZR20	110W	XL	1060	49	9.0	273	756	8.0
	285/45ZR22*	114W	XL	1180	49	9.5	285	815	7.2
40 Series	215/40ZR17*	87W	XL	545	49	7.5	218	604	7.2
	245/40ZR17*	95W	XL	690	49	8.5	248	628	7.2
	205/40ZR18*	86W	XL	530	49	7.5	212	621	7.2
	215/40ZR18*	89W	XL	580	49	7.5	218	629	7.2
	245/40ZR20	99W	XL	775	49	8.5	248	704	7.2
	255/40ZR20*	101W	XL	825	49	9.0	260	712	7.2
	265/40ZR20	104W	XL	900	49	9.5	271	720	8.0
	275/40ZR20	106W	XL	950	49	9.5	278	728	8.0
	265/40ZR21	105W	XL	925	49	9.5	271	745	8.0
	265/40ZR22*	106W	XL	950	49	9.5	271	771	7.2
	275/40ZR22*	107W	XL	975	49	9.5	278	779	7.2
	285/40ZR22*	110W	XL	1060	49	10.0	290	787	7.2
	305/40ZR22*	114W	XL	1180	49	11.0	313	803	8.0

* Newly added size

For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 300 AA A

SU6000 eco



Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
35 Series	255/35ZR18*	94Y	XL	670	49	9.0	260	635	7.2
	275/35ZR18*	99Y	XL	775	49	9.5	278	649	7.2
	215/35ZR19*	85W	XL	515	49	7.5	218	633	7.2
	225/35ZR19*	88Y	XL	515	49	8.0	230	641	7.2
	255/35ZR19*	96W	XL	710	49	9.0	260	661	7.4
	235/35ZR20*	92Y	XL	630	49	8.5	241	672	7.2
	255/35ZR20*	97Y	XL	730	49	9.0	260	686	7.2
	275/35ZR20*	102Y		850	49	9.5	278	700	7.2
	315/35ZR20*	110Y	XL	1060	49	11.0	320	728	7.2
	295/35ZR21*	107W	XL	975	49	10.5	301	739	7.2
	265/35ZR22*	102W	XL	850	49	9.5	271	745	7.2
	285/35ZR22	106W	XL	950	49	10.0	290	759	8.0
30 Series	265/30ZR19*	93Y	XL	650	49	9.5	271	643	7.2


* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.


For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 500 A A


SU6001 eco

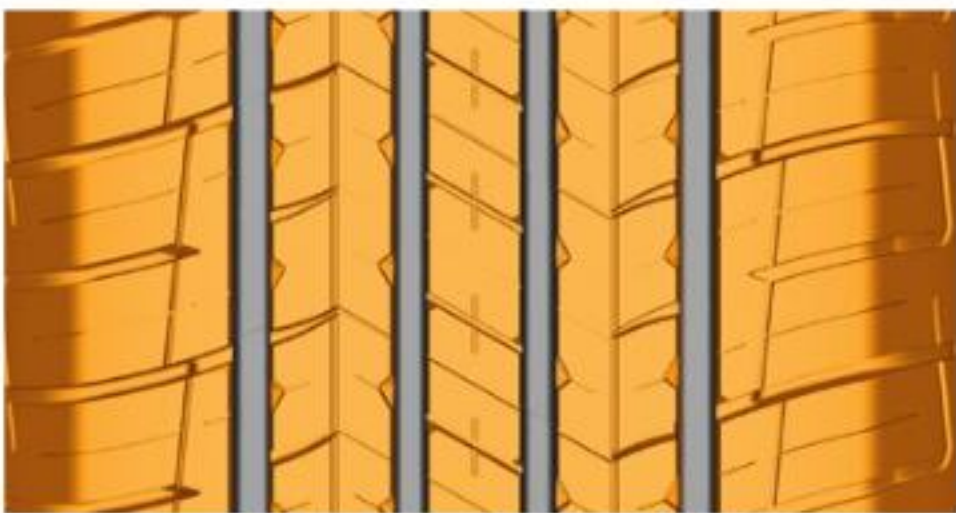

Optimized symmetrical tread design ensure wider footprint thereby having unmatched road contact providing overall driving safety and stability

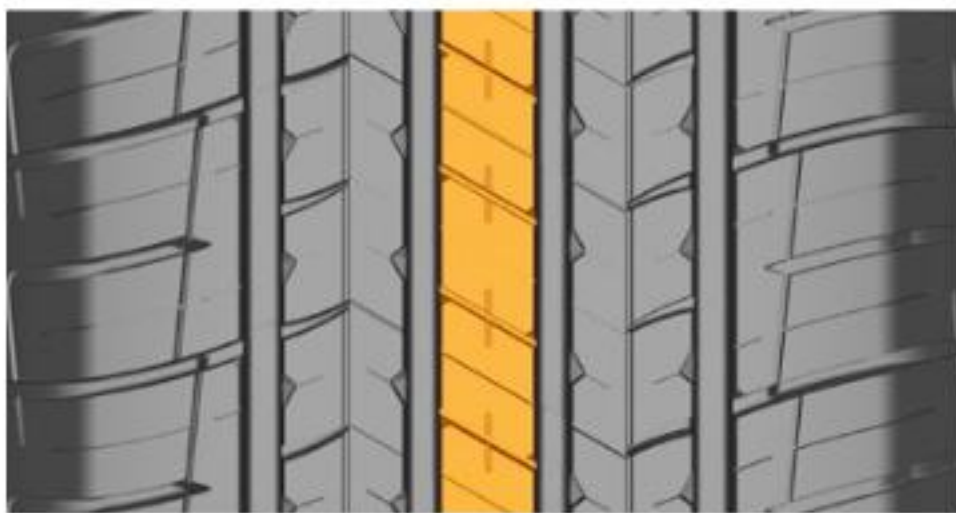

Rigid centre tread blocks provide precise steering fastness in the longitudinal drive

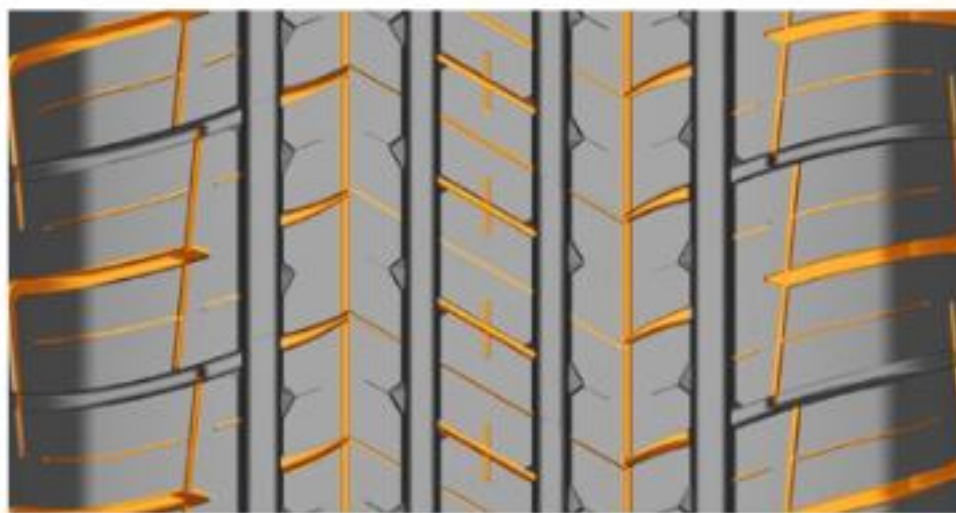

Multi typed sipes increase grip on wet and dry roads

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	235/75R15	105H	925	44	6.5	235	733	8.5
70 Series	215/70R16*	100H	800	44	6.5	221	708	8.5
	225/70R16	103T	875	44	6.5	228	722	8.5
	235/70R16	106T	950	44	7.0	240	736	8.5
	245/70R16	111H XL	1090	49	7.0	248	750	8.8
	255/70R16	111H	1090	44	7.5	260	764	8.8
	265/70R16	112H	1120	44	8.0	272	778	8.8
65 Series	215/65R17*	99H	775	44	6.5	221	712	8.5
	225/65R17	102H	850	44	6.5	228	724	8.5
	235/65R17	108H XL	1000	49	7.0	240	738	8.5
	245/65R17	111H XL	1090	49	7.0	248	750	8.8
	265/65R17*	112H	1120	44	8.0	272	776	8.8
	235/65R18	106H	950	44	7.0	240	763	8.5
60 Series	235/60R17*	106H XL	950	49	7.0	240	714	8.5
	225/60R18	100H	800	44	6.5	228	727	8.5
	265/60R18	114H	1180	49	8.0	272	775	8.5


* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZT6000 eco



Symmetric tread design ensures smoother rolling on the road and even treadwear throughout the tire's life

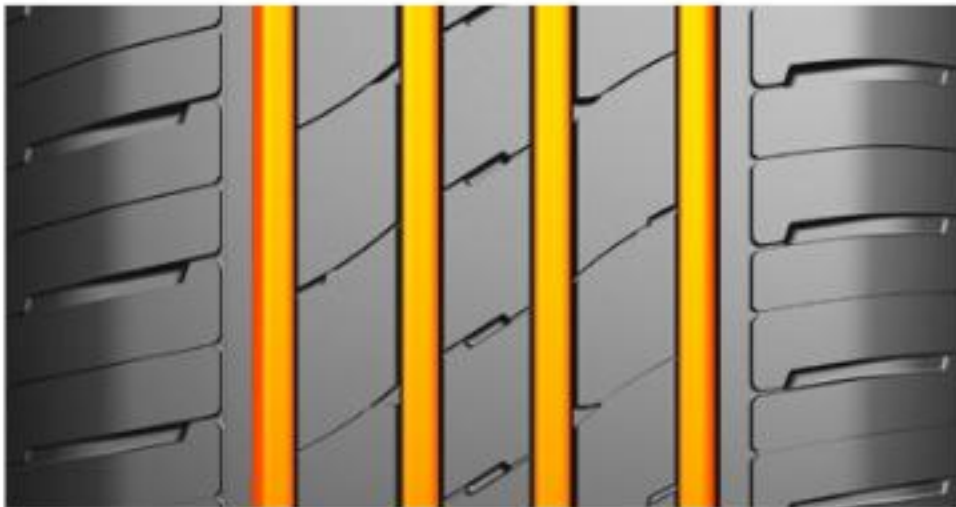

Wider grooves help in quicker dissipation of water thereby enhancing braking & stability on wet conditions



Three inner ribs & optimal pitch variation reduces road noise and improves ride comfort

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
80 Series	145/80R13*	75T	387	44	4.0	145	562	6.5
70 Series	155/70R13	75T	387	44	4.5	157	548	7.0
	165/70R13	79T	437	44	5.0	170	562	7.0
	175/70R13	82T	475	44	5.0	177	576	7.0
	165/70R14	81T	462	44	5.0	170	588	7.0
	175/70R14	84T	500	44	5.0	177	602	7.0
	185/70R14	88T	560	44	5.5	189	616	7.0
	195/70R14*	91T	615	44	6.0	201	630	7.0
65 Series	205/70R15*	96H	710	44	6.0	209	669	7.0
	155/65R13*	73T	365	44	4.5	157	532	7.0
	165/65R13*	77T	387	44	5.0	170	544	7.0
	155/65R14*	75T	387	44	4.5	157	558	7.0
	165/65R14	79T	437	44	5.0	170	570	7.0
	175/65R14	82T	475	44	5.0	177	584	7.0
	185/65R14	86H	530	44	5.5	189	596	7.0
	175/65R15	84H	500	44	5.0	177	609	7.0
	185/65R15	88H	560	44	5.5	189	621	7.0
	195/65R15	91V	615	44	6.0	201	635	7.0
	205/65R15	94H	670	44	6.0	209	647	7.0
	205/65R16*	95H	690	44	6.0	209	672	7.0
60 Series	215/65R16	98H	750	44	6.5	221	686	7.0
	165/60R14	75H	387	44	5.0	170	554	7.0
	185/60R14	82H	475	44	5.5	189	578	7.0
	165/60R15*	81H XL	462	49	5.0	170	579	7.0
	175/60R15*	81V	462	44	5.0	177	591	7.0
	185/60R15	84H	500	44	5.5	189	603	7.0
	195/60R15	88H	560	44	6.0	201	615	7.0
	205/60R15	91V	615	44	6.0	209	627	7.0
	195/60R16*	89H	580	44	6.0	201	640	7.0
	205/60R16	92V	630	44	6.0	209	652	7.0
	215/60R16	95V	690	44	6.0	221	664	7.0

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZT6000 eco




Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
55 Series	165/55R14*	72H	355	44	5.0	170	538	7.0
	185/55R14*	80H	450	44	6.0	194	560	7.0
	165/55R15*	75H	387	44	5.0	170	563	7.0
	185/55R15	82V	475	44	6.0	194	585	7.0
	195/55R15	85V	515	44	6.0	201	595	7.0
	205/55R15*	88V	560	44	6.5	214	607	7.0
	185/55R16*	83V	487	44	6.0	194	610	7.0
	195/55R16	87V	545	44	6.0	201	620	7.0
	205/55R16	91V	615	44	6.5	214	632	7.0
50 Series	165/50R15*	72V	355	44	5.0	170	547	7.0
	195/50R15	82V	475	44	6.0	201	577	7.0

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For Passenger Cars
SUMMER RANGE UTQG400 A A

ZT6001 eco

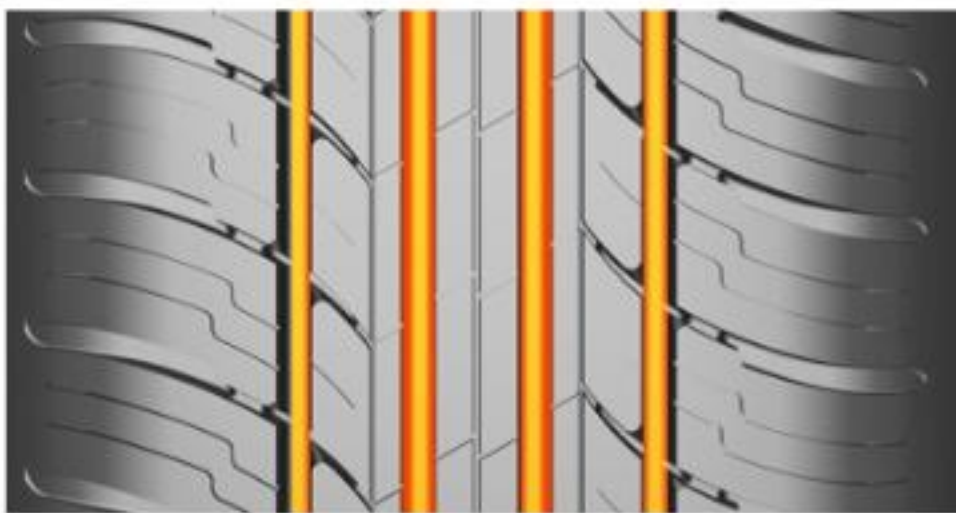

Optimized center ribs ensure precise steering, increase road grip and traction



Large shoulder blocks ensure better cornering & stability



Four main wide grooves to retain excellent dry and wet braking performance

Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
80 Series	155/80R13*	79T		437	44	4.5	157	578	8.0
70 Series	185/70R13	86T		530	44	5.5	189	590	7.0
	205/70R14	98H	XL	750	49	6.0	209	644	7.0
65 Series	155/65R13	73T		365	44	4.5	157	532	8.0
	165/65R13	77T		412	44	5.0	170	544	7.0
	175/65R13	80T		450	44	5.0	177	558	8.0
60 Series	175/60R13	77T		412	44	5.0	177	576	8.0
	195/60R14	86H		530	44	6.0	201	590	7.0

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.



NEED CASH FAST?
310-550-CASH
NO CREDIT
HANGAR1999.COM





ZEETEX

