



ZEETEX



**TRUCK & BUS RADIAL TYRES
CATALOG**


ZAFCO's first in-house brand, **ZEETEX** was born in 2005 and is now sold in over 85 countries.

ZEETEX has been a key player in the replacement tire industry since its inception. With unique tread patterns, enhanced control, silica compound, and environmentally friendly solutions, the **ZEETEX** brand is committed to providing the best value for money to our customers. Whether it is integration with cutting-edge technology in tire production, or first-class supply-chain management, we strive to ensure every tire reaches the end user in perfect condition.

ZEETEX's proven performance and continuous efforts to offer consumers a value-driven proposition and ride satisfaction has led to growth at a tremendous pace.

SUPER SERIES

VFM SERIES

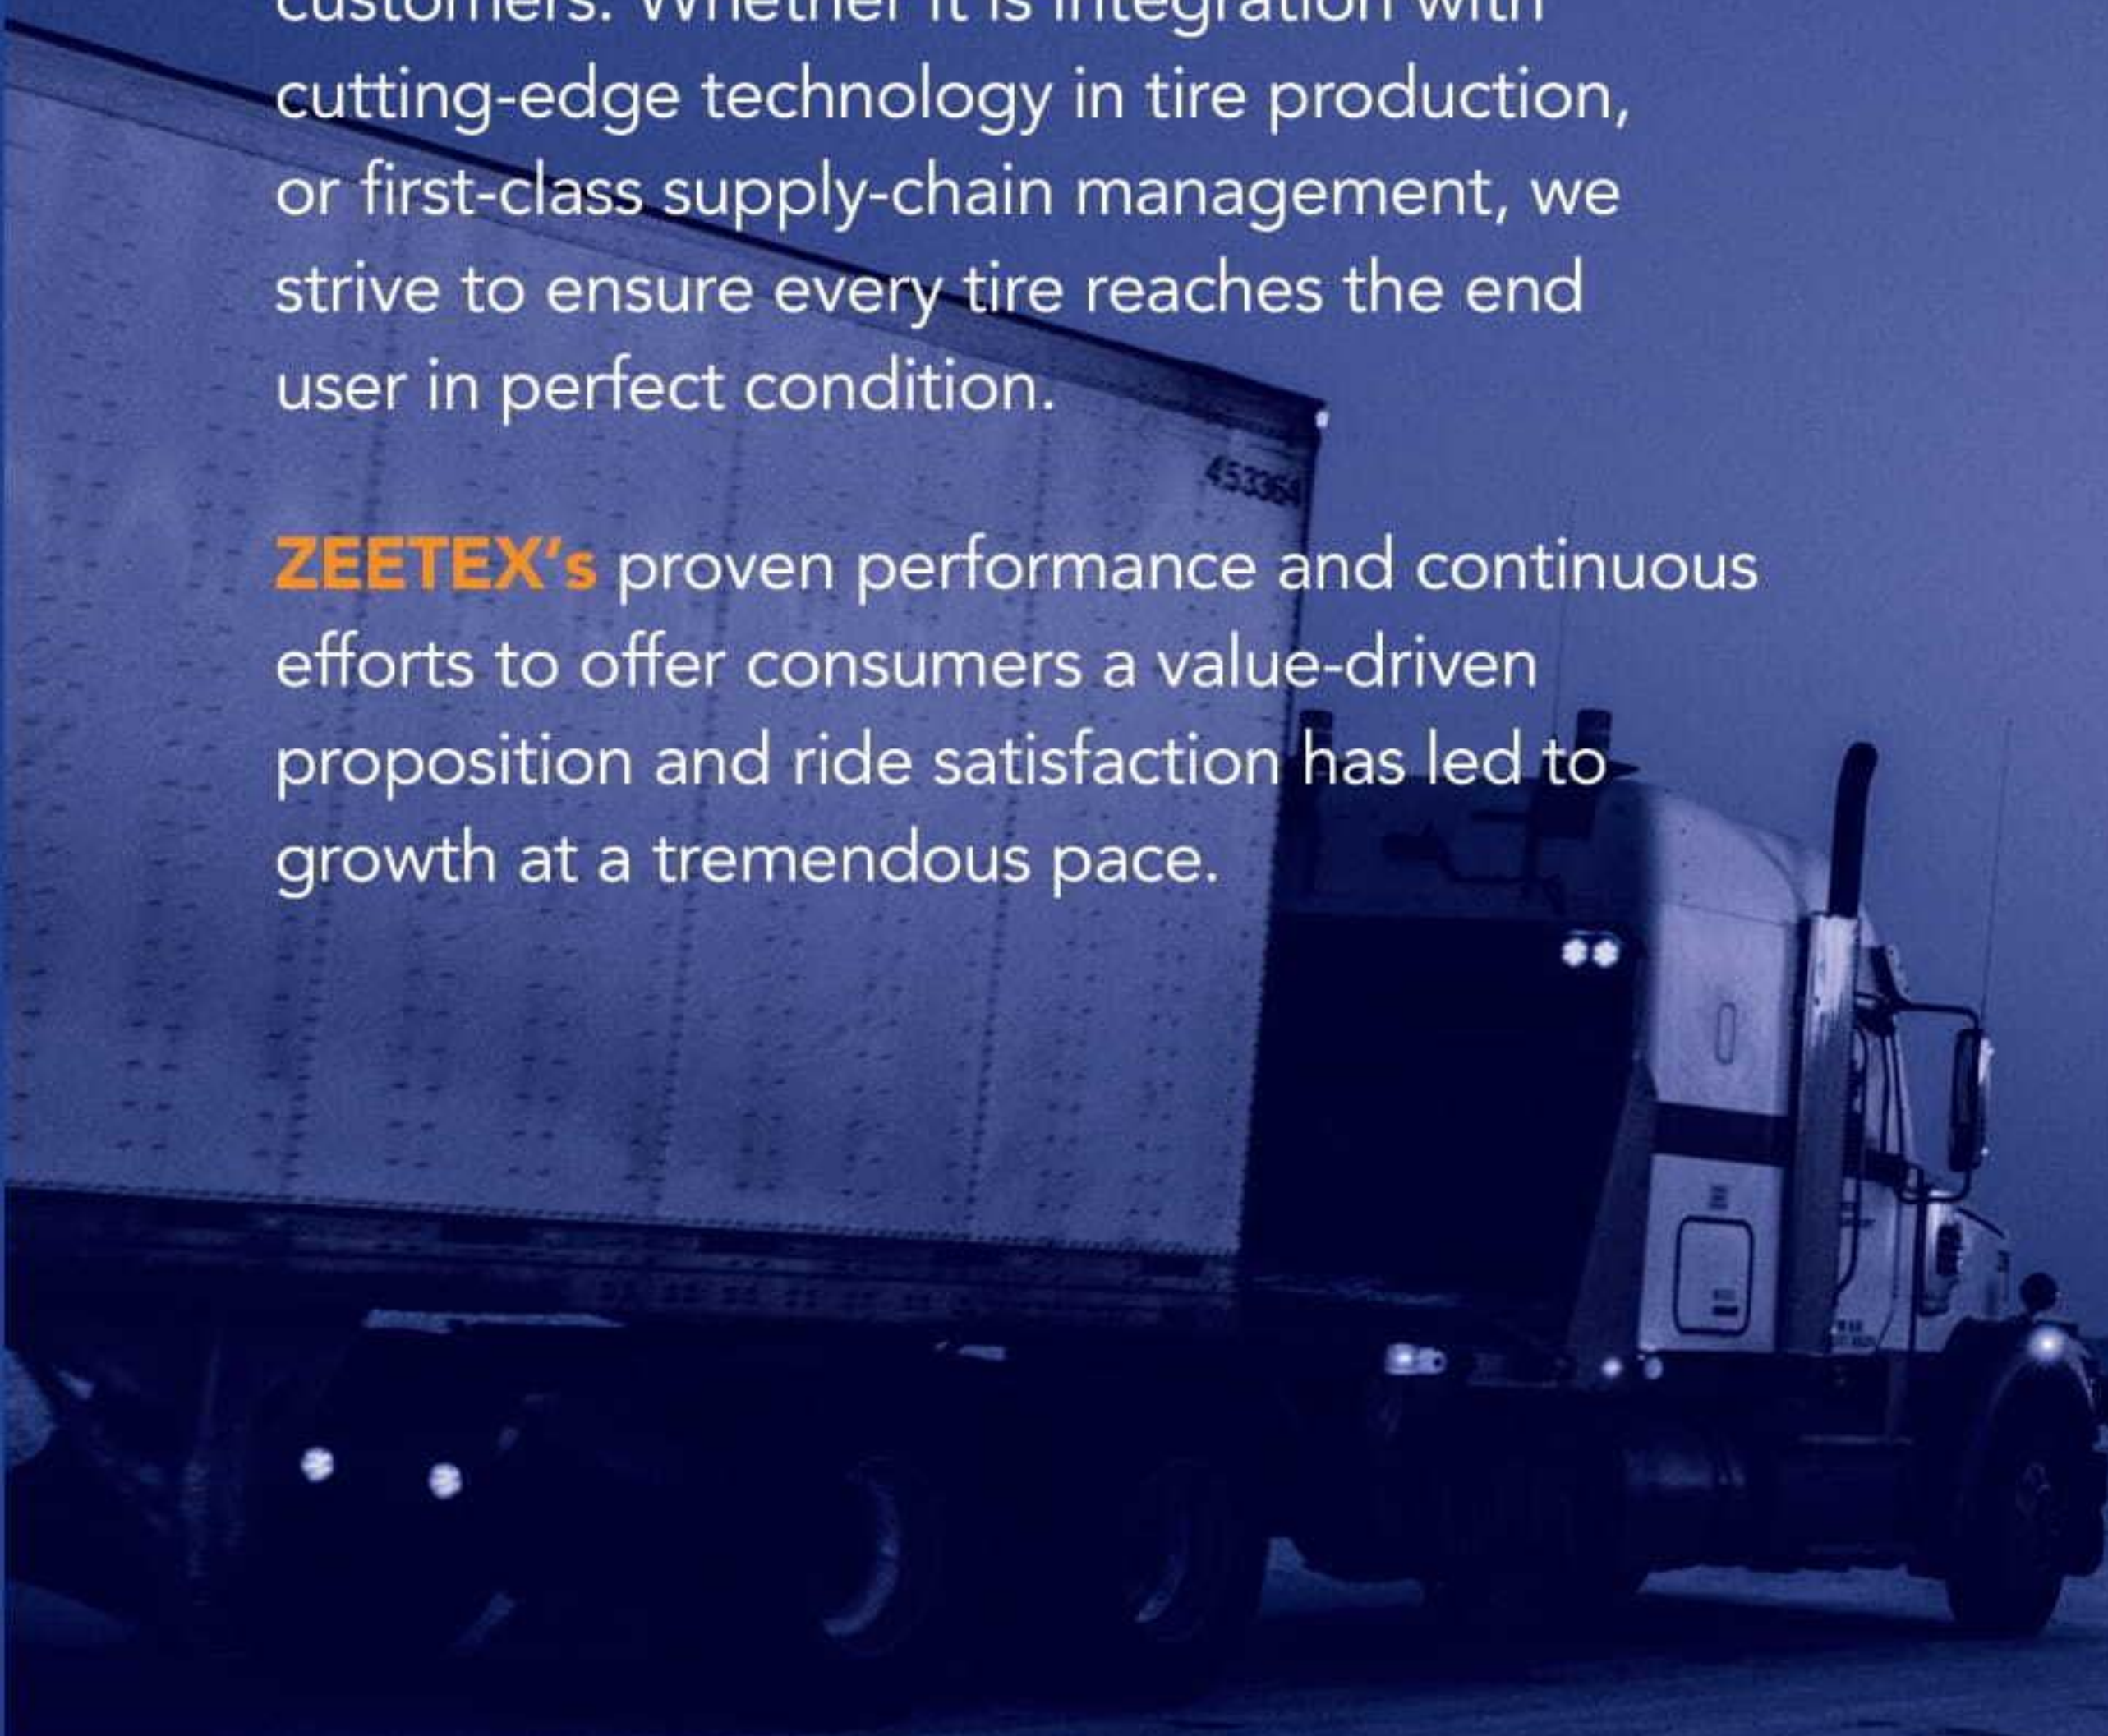

WHY ZEETEX?



HIGH-QUALITY MATERIALS

ZEETEX tires are manufactured using a silica compound that is typically found in premium brands, making the quality comparable to higher tier brands which allows our dealers to stay competitive in the market.



COMPETITIVE WARRANTY COVERAGE

ZEETEX has a comprehensive warranty program that can be used as a selling tool for dealers or as a way to backup their own warranty programs.



FACTORY-DIRECT PROGRAM

Our tires are shipped factory-direct from our manufacturing facility. We partner with domestic dealers who are container-capable to distribute our tires to smaller dealers.



SELL-OUT SUPPORT




ZEETEX customers receive unique sell-out support from ZAFECO, including access to point-of-sales materials and resources through our online Dealer Portal as well as customized training programs.



MORE THAN TBR TIRES

The ZEETEX TBR line offers a complete portfolio of tires with size assortments for multiple applications and segments. ZEETEX also makes tires for ATV, Specialty Trailer, and Commercial applications.

APPLICATION CHART

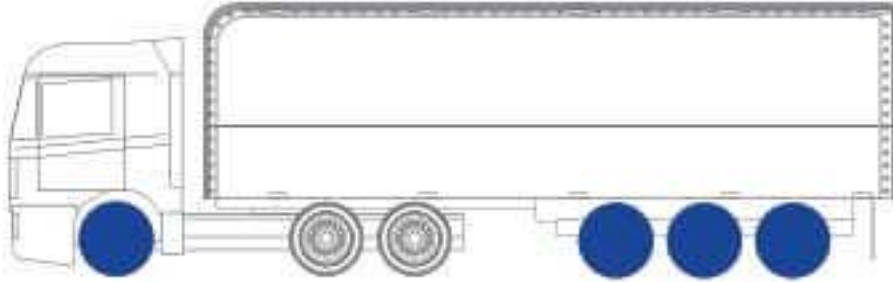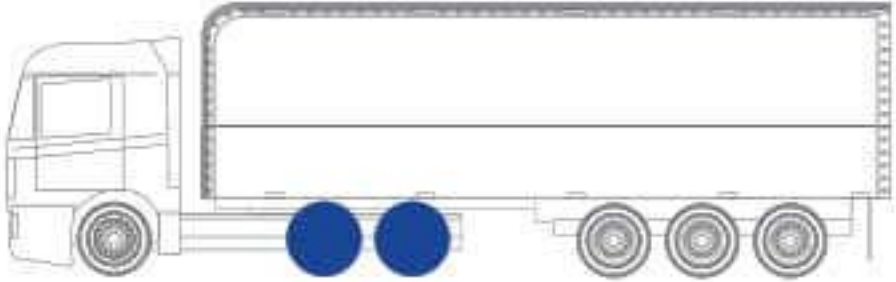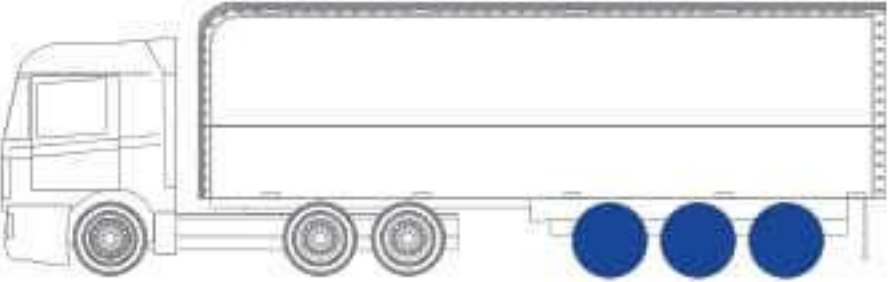
	STEER/ALL POSITION	DRIVE	TRAILER
			
LONG HAUL			
REGIONAL	ZSR max ZOR max	ZDR max	ZTR max
MIXED (ON/OFF)	ZOM max ZOM1 max ZOM2 max	ZDM max	
URBAN	ZOU max		

ZSR max


Application	Position
Regional	Steer




Design Feature

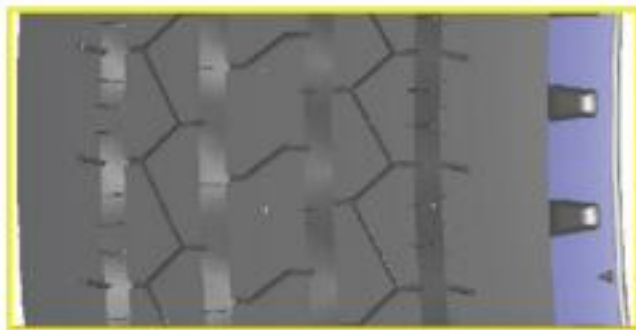


Square shoulder effectively reduces irregular wear.

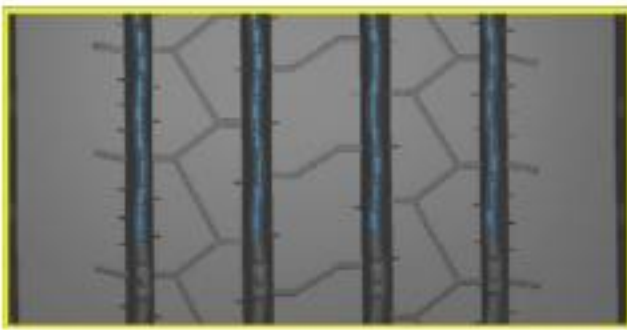

Stone ejector eject stones, effectively prevent the bottom crack and protect the body.

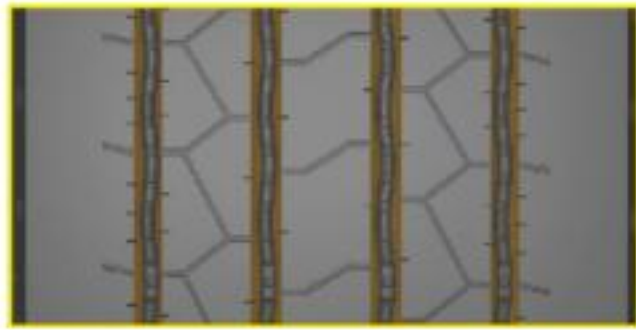

Straight main grooves reduce rolling resistance and improve drainage and handling performance.

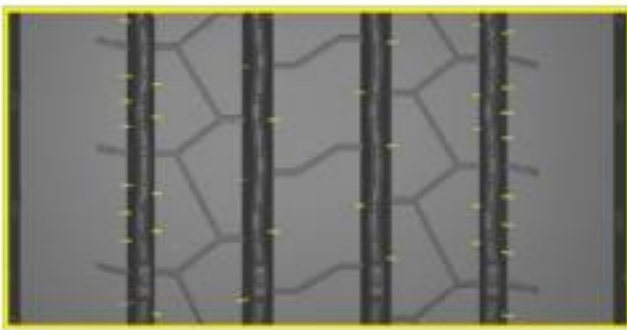

Miniature sipes on groove edge improve traction performance and prevents uneven wear.

Size	PR	Load Index	Speed Symbol	Maximum Load Single	Maximum Load Dual	Maximum Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
275/70R22.5	18	150/148	M	3350	3150	131	8.25	276	958	15.0
295/80R22.5	18	154/149	M	3750	3250	123	9.00	298	1044	15.0
315/70R22.5	18	156/150	L	4000	3350	131	9.00	312	1014	15.0
315/80R22.5	20	156/150	L	4000	3350	123	9.00	312	1076	15.0
385/65R22.5	20	164	K	5000		131	11.75	389	1072	16.0

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZDR max


Application	Position
Regional	Drive




Design Feature




The tie-bars between the pattern blocks helps improve tread stability and reduce heel to toe wear.

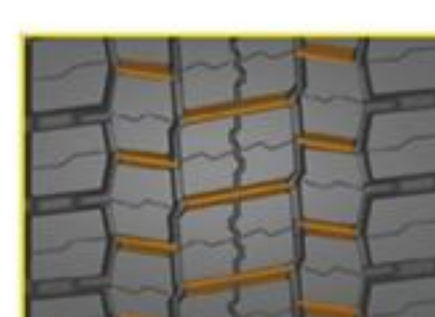

Full-depth horizontal grooves can quickly drain water into the main groove, improving the traction performance of the wet.

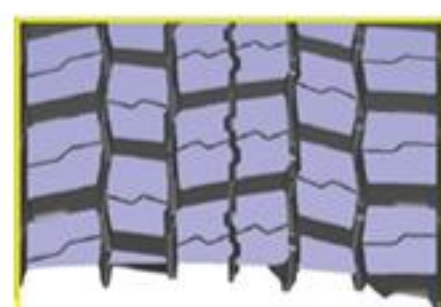

Wide tread and deep main groove provide excellent mileage performance.

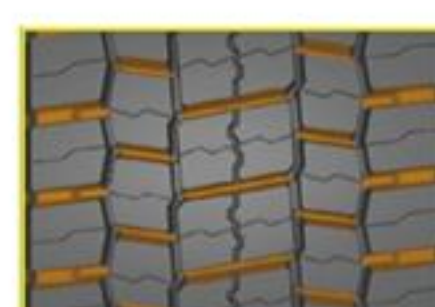

The high density transverse grooves provide sufficient traction.



Optimized pattern groove angle design improves handling performance.

Size	PR	Load Index	Speed Symbol	Maximum Load Single	Maximum Load Dual	Maximum Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
215/75R17.5	16	126/124	M	1700	1600	102	6.00	211	767	15.0
235/75R17.5	16	132/130	M	2000	1900	112	6.75	233	797	16.0
265/70R19.5	16	140/138	M	2500	2360	112	7.50	262	867	16.0
295/80R22.5	18	152/148	M	3550	3150	123	9.00	298	1044	20.0
315/70R22.5	18	154/150	L	3750	3350	131	9.00	312	1014	21.0
315/80R22.5	20	156/150	L	4000	3350	123	9.00	312	1076	21.0

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZTR max

Application	Position
Regional	Trailer




Design Feature



Continuous tread pattern greatly reduces rolling resistance.




The wide tread increases the ground contact area and improves the grip.

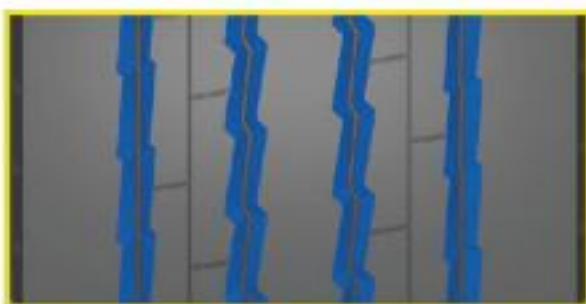

Optimized groove wall angle effectively prevents stone and protect the body.



4 zigzag main grooves provide excellent traction and drainage performance for various road conditions.

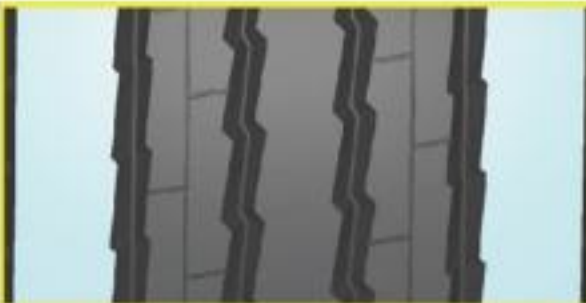

The wide shoulder improves tread stability and handling, prevents uneven wear.

Size	PR	Load Index	Speed Symbol	Maximum Load Single	Maximum Load Dual	Maximum Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
235/75R17.5	18	143/141	J	2725	2575	127	6.75	233	797	12.5
385/65R22.5	20	164	K	5000		131	11.75	389	1072	15.0

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZOR max

Application	Position
Regional	All Position



Design Feature



Special notch design on shoulder groove wall improves traction on dry and wet.



Straight groove into curve groove wave design prevent stone and protect the body.



Shoulder sipes relieve shoulder pressure, prevent irregular wear and prolong tread life.



5-rib pattern design can improve handling and mileage performance.

Size	PR	Load Index	Speed Symbol	Maximum Load Single	Maximum Load Dual	Maximum Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
215/75R17.5	16	135/133	L	2180	2060	123	6.00	211	767	12.5
265/70R19.5	16	140/138	M	2500	2360	112	7.50	262	867	14.5
255/70R22.5	16	140/137	L	2500	2300	120	7.50	255	930	14.0


Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZOM max


Application	Position
Mixed	All Position




Design Feature

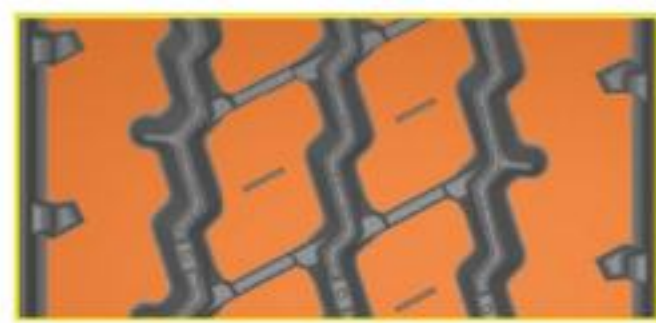


High-contact tread ensures good driving performance on mileage and muddy surfaces.

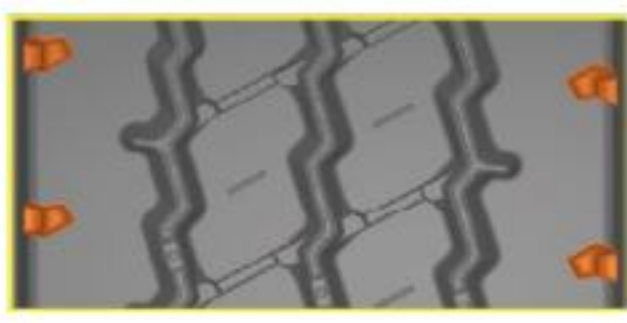

Semi-open shoulders provide excellent traction and wet grip.

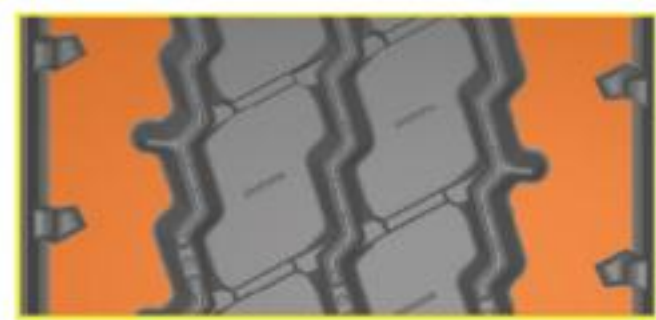

Solid and wider shoulder ribs provide better tread stiffness, resulting in increased mileage.

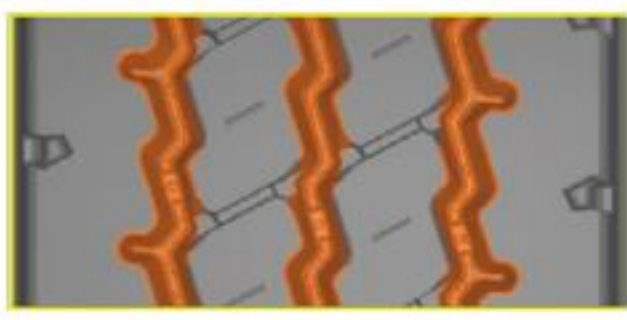

V-shaped groove can effectively prevent stone, protect the casing and prolong the service life.

Size	PR	Load Index	Speed Symbol	Maximum Load Single	Maximum Load Dual	Maximum Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
11R22.5	16	146/143	L	3000	2725	120	8.25	279	1054	16.4
315/80R22.5	22	161/157	K	4625	4125	131	9.00	312	1076	15.9

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZOM1 max


Application	Position
Mixed	All Position



Design Feature



Rugged four-rib design with special groove shape to combat stone retention for long mileage and retreadability.

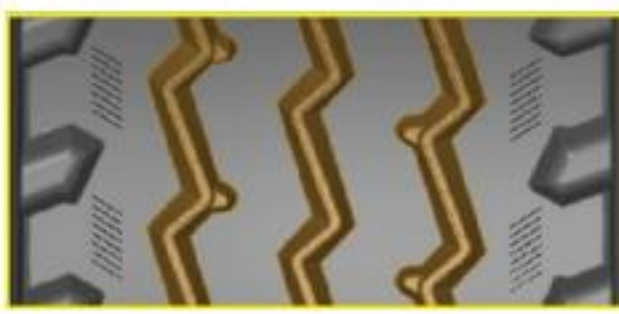

V-Channels and groove bottom protectors defend the casing against stone retention and stone-drilling.



Shoulder lugs provide grip and reduce the tread heat, prolong the life of the tread.



Zigzag groove design for true all-position use.

Size	PR	Load Index	Speed Symbol	Maximum Load Single	Maximum Load Dual	Maximum Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
315/80R22.5	20	156/150	K	4000	3350	123	9.00	312	1076	15.9
325/95R24	22	162/160	K	4750	4500	123	9.00	325	1228	17.0

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZOM2 max

Application	Position
Mixed	All Position




Design Feature




Pattern block design and edges provide traction for both on and off application use.



The wide tread and deep grooves ensure high mileage.

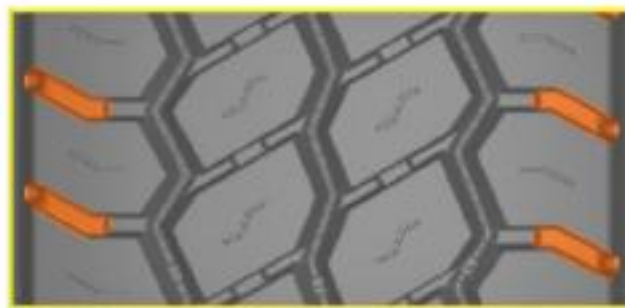

Open shoulder blocks with tie-bars prevent irregular wear and provide excellent traction performance in on-off road conditions.

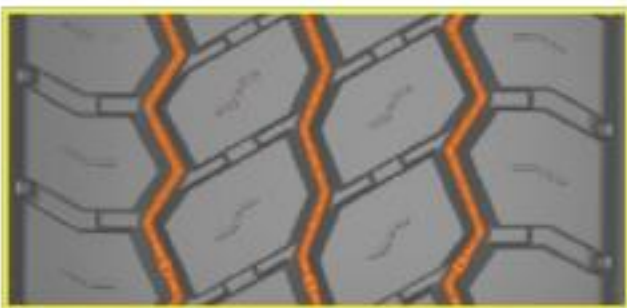

Stone ejector in the middle of the main grooves prevents stone drilling.

Size	PR	Load Index	Speed Symbol	Maximum Load Single	Maximum Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
385/65R22.5	20	164	K	5000	131	11.75	389	1072	15.2


Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZDM max

Application	Position
Mixed	Drive



Design Feature

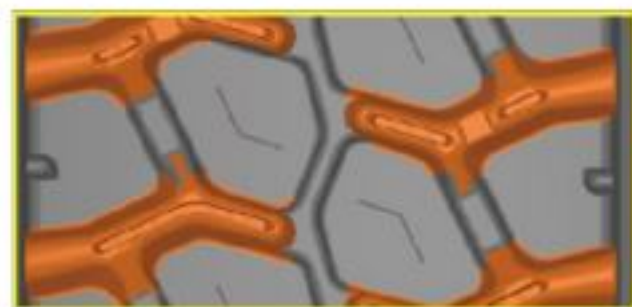


Aggressive lug pattern design provides strong traction on or off the road.



Deep grooved design extends tyre life and provides superior traction.



The intermediate interblock tie-bar ensures excellent straight driving performance and prevents the impact dispersion of the blocks, thereby improving the durability of the tyre.

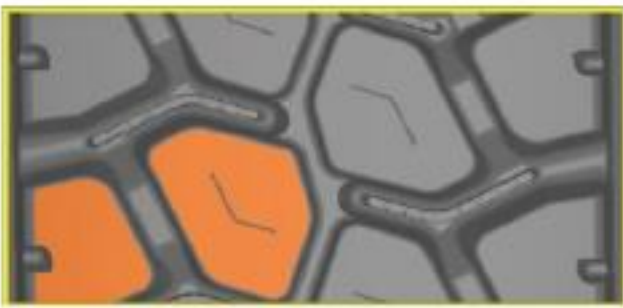

Large tread block design provides good cut and penetrations resistance.

Size	PR	Load Index	Speed Symbol	Maximum Load Single	Maximum Load Dual	Maximum Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
11R22.5	16	146/143	L	3000	2725	120	8.25	279	1054	22.2


Pattern availability may slightly vary based on country, please reach out to your account manager for details.

ZOU max


Application	Position
Urban	All Position




Design Feature

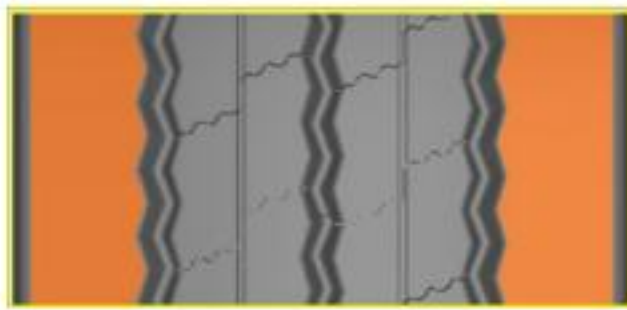


Optimized shoulder rib design improves handling and driving stability.

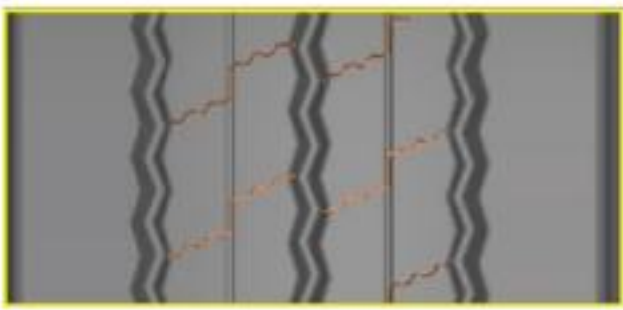

Optimized block pattern geometry ensures better traction and even wear.

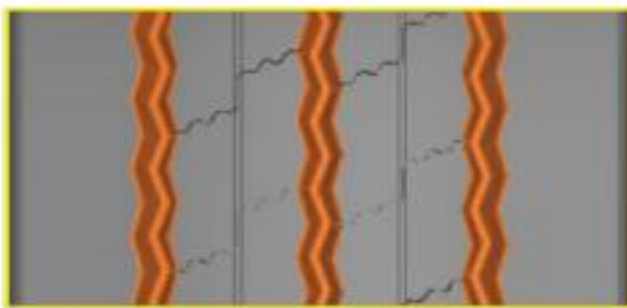

Zigzag grooves together with an optimal block arrangement provide an improved traction performance.

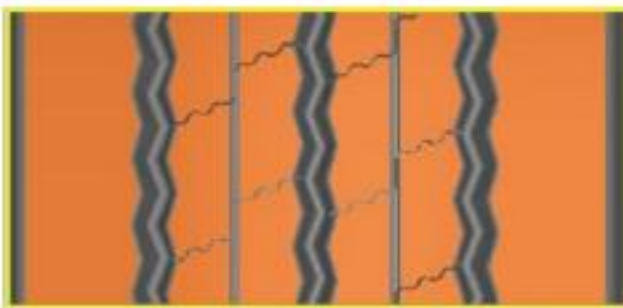

Wide tread blocks increase the rigidity of the tyre and increase the range while reducing rolling resistance.

Size	PR	Load Index	Speed Symbol	Maximum Load Single	Maximum Load Dual	Maximum Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
275/70R22.5	18	152/149	J	3550	3250	131	8.25	276	958	18.0

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

LOAD INDEX

Load Index	kg	Load Index	kg	Load Index	kg	Load Index	kg	Load Index	kg	Load Index	kg
75	387	91	615	107	975	123	1550	139	2430	155	3875
76	400	92	630	108	1000	124	1600	140	2500	156	4000
77	412	93	650	109	1030	125	1650	141	2575	157	4125
78	425	94	670	110	1060	126	1700	142	2650	158	4250
79	437	95	690	111	1090	127	1750	143	2725	159	4375
80	450	96	710	112	1120	128	1800	144	2800	160	4500
81	462	97	730	113	1150	129	1850	145	2900	161	4625
82	475	98	750	114	1180	130	1900	146	3000	162	4750
83	487	99	775	115	1215	131	1950	147	3075	163	4875
84	500	100	800	116	1250	132	2000	148	3150	164	5000
85	515	101	825	117	1285	133	2060	149	3250	165	5150
86	530	102	850	118	1320	134	2120	150	3350	166	5300
87	545	103	875	119	1360	135	2180	151	3450	167	5450
88	560	104	900	120	1400	136	2240	152	3550	168	5600
89	580	105	925	121	1450	137	2300	153	3650	169	5800
90	600	106	950	122	1500	138	2360	154	3750	170	6000

SPEED SYMBOL

Speed Symbol	Speed (km/h)	Speed Symbol	Speed (km/h)	Speed Symbol	Speed (km/h)
A1	5	D	65	Q	160
A2	10	E	70	R	170
A3	15	F	80	S	180
A4	20	G	90	T	190
AS	25	J	100	U	200
A6	30	K	110	H	210
A7	35	L	120	V	240
AS	40	M	130	W	270
B	50	N	140	Y	300
C	60	P	150	ZR	>240



Jebel Ali Free Zone (South)

P.O.Box: 262176, Dubai, U.A.E., Ph: +97148073626

mea.zeetex.com



Zeetex MEA



@zeetexmea



Zeetex MEA