



**PASSENGER CAR & LIGHT TRUCK
TYRES CATALOG**

ZAFCO's first in-house brand, **ZEETEX** was born in 2005 and is now sold in over 132 countries.

ZEETEX has been a key player in the replacement tire industry since its inception. With unique tread patterns, enhanced control, silica compound, and environmentally friendly solutions, the **ZEETEX** brand is committed to providing the best value for money to our customers. Whether it is integration with cutting-edge technology in tire production, or first-class supply-chain management, we strive to ensure every tire reaches the end user in perfect condition.

ZEETEX's proven performance and continuous efforts to offer consumers a value-driven proposition and ride satisfaction has led to growth at a tremendous pace.

PASSENGER


ULTRA HIGH PERFORMANCE

SPORT UTILITY VEHICLE

4X4

LIGHT TRUCK


ZT1000

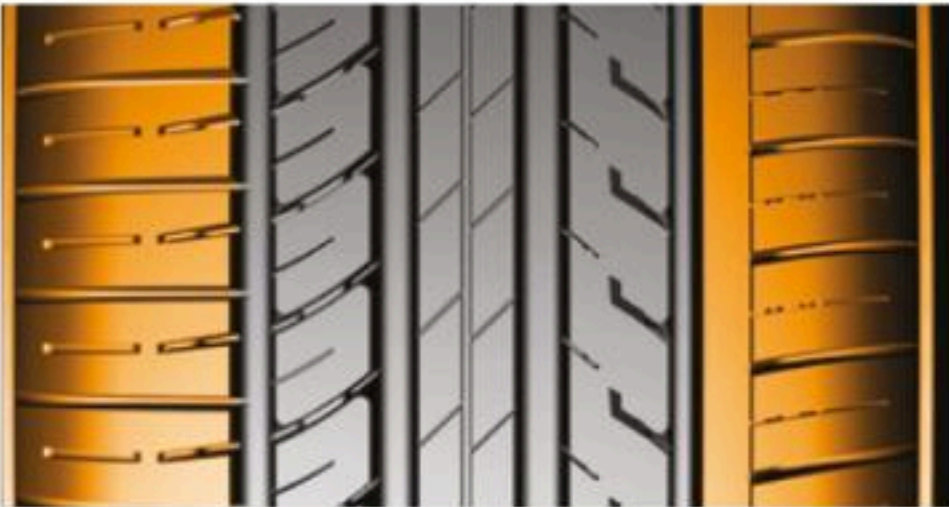

Eco friendly because of the curved edge of pattern blocks that ensures efficient wear resistance, increasing tire service life



Continuous 3 center ribs with optimal block distribution provide steering stability performance at high speed

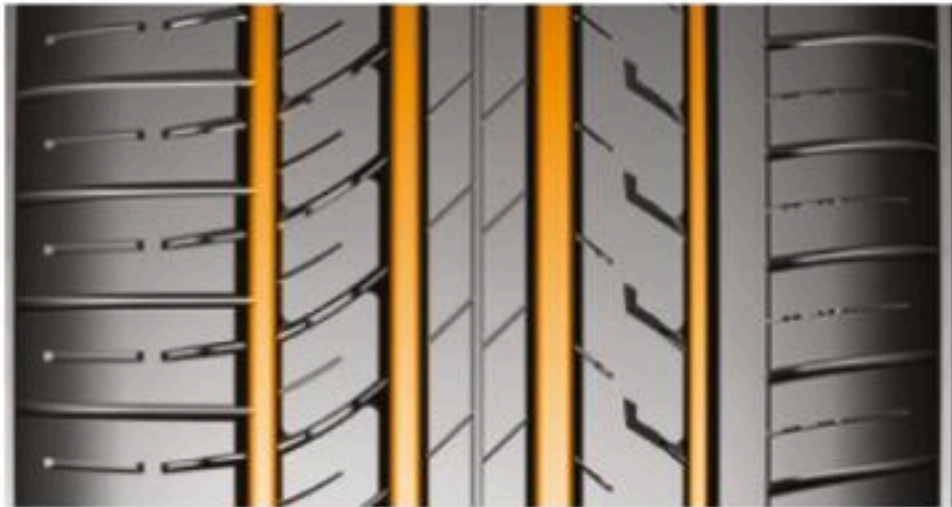

Well positioned wider grooves & slightly curved lateral grooves help in quicker dissipation of water thereby enhancing braking & stability on wet conditions

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
80 Series	145/80R13	75T	387	44	4.0	150	562	7.1
	155/80R13	79T	437	44	4.5	157	578	7.5
	175/80R15	90S	600	44	5.0	175	661	7.5
70 Series	155/70R12 (WSW)	73H	365	44	4.5	167	520	7.1
	165/70R12 (WSW)	77H	412	44	5.0	180	534	7.5
	175/70R12	80H	450	36	5.0	177	551	7.9
	145/70R13	71T	345	44	4.5	150	534	7.9
	155/70R13	75T	387	44	4.0	167	546	7.1
	155/70R13	75H	387	44	4.0	167	546	7.1
	165/70R13	79T	437	36	5.0	170	562	7.9
	175/70R13	82T	475	36	5.0	177	576	7.9
	185/70R13	86T	530	36	5.5	189	590	7.9
	165/70R14	81H	462	36	5.0	170	588	7.9
	175/70R14	88H XL	560	50	5.0	187	600	7.5
	185/70R14	88H	560	36	5.5	189	616	7.9
	195/70R14	91T	615	44	6.0	201	630	7.9
	205/70R14	98H XL	750	36	6.0	209	644	7.9
	205/70R15	96H	710	44	6.0	209	669	7.9
	215/70R15	98H	750	36	6.5	221	683	7.9
65 Series	155/65R13	73T	365	36	4.5	157	532	7.9
	165/65R13	77T	412	36	5.0	170	554	7.9
	175/65R13	80T	450	44	5.0	189	555	7.5
	155/65R14	75T	387	36	4.5	157	558	7.9
	165/65R14	79T	437	44	5.0	182	567	7.5
	165/65R14	79H	437	44	5.0	182	567	7.5
	175/65R14	82T	475	36	5.0	177	584	7.9
	175/65R14	82H	475	36	5.0	177	584	7.9
	185/65R14	86T	530	36	5.5	189	596	7.9
	185/65R14	86H	530	36	5.5	189	596	7.9
	175/65R15	88H XL	560	50	5.0	189	606	7.5
	185/65R15	88T	560	36	5.5	189	621	7.9
	185/65R15	88H	560	36	5.5	189	621	7.9
	195/65R15	91T	615	36	6.0	201	635	7.9
	195/65R15	91H	615	36	6.0	201	635	7.9

ZT1000



Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
65 Series	195/65R15	91V	615	36	6.0	201	635	7.9
	205/65R15	94H	670	36	6.0	209	647	7.9
	205/65R15	94V	670	36	6.0	209	647	7.9
	215/65R15	100V XL	800	50	6.5	226	659	7.9
	205/65R16	95V	690	36	6.0	206	672	7.9
	215/65R16	98V	750	36	6.5	221	686	7.9
	215/65R17	99T	775	44	6.5	220	712	8.3
60 Series	175/60R13	77H	412	36	5.0	177	540	7.9
	185/60R14	82H	475	36	5.5	189	578	7.9
	195/60R14	86H	530	36	6.0	201	610	7.9
	205/60R14	88H	560	36	6.0	209	602	7.9
	175/60R15	81H	462	36	5.0	177	591	7.1
	185/60R15	84H	500	49	6.0	189	603	7.9
	185/60R15	88H XL	560	49	6.0	189	603	7.9
	195/60R15	88H	560	36	6.0	201	615	7.9
	195/60R15	88V	560	36	6.0	201	615	7.9
	205/60R15	91V	615	44	6.0	209	627	7.9
	175/60R16	82H	475	36	5.0	177	616	7.1
	195/60R16	89H	580	36	5.0	201	640	7.1
	205/60R16	96V XL	710	49	6.0	209	652	7.9
	215/60R16	95V	690	36	6.5	221	664	7.9
	225/60R16	98H	750	44	6.5	228	676	8.7
	235/60R16	100V	800	44	7.0	240	688	8.7
	225/60R17	99H	775	44	6.5	228	702	8.7
	235/60R17	102H	850	44	7.0	240	714	8.7
55 Series	165/55R14	72V	355	44	5.0	170	538	7.5
	185/55R14	80V	450	44	6.0	194	560	7.5
	165/55R15	75V	387	36	5.0	170	563	7.9
	185/55R15	82H	475	44	6.0	194	585	7.5
	185/55R15	82V	475	44	6.0	194	585	7.5
	195/55R15	85V	515	36	6.0	201	595	7.9
	205/55R16	91H	615	36	6.5	214	632	7.9
	205/55R16	91V	615	36	6.5	214	632	7.9
	205/55R16	91W	615	36	6.5	214	632	7.9
50 Series	165/50R15	73V	365	44	5.0	170	547	7.5
	195/50R15	82V	475	44	6.0	201	577	7.9
	165/50R16	75V	387	44	5.0	170	572	7.5
45 Series	165/45R15	72V XL	355	42	5.5	165	529	7.1
	165/45R16	74V XL	375	42	5.5	165	554	7.1
	195/45R16	84V XL	500	49	6.5	195	582	7.9
40 Series	165/40R16	73V XL	365	44	6.0	170	538	7.5
	165/40R17	75V XL	387	44	6.0	170	564	7.1


For Passenger Cars

SUMMER RANGE UTQG 340 A A


ZT1000



Summer Test conducted by Auto Bild – 2021

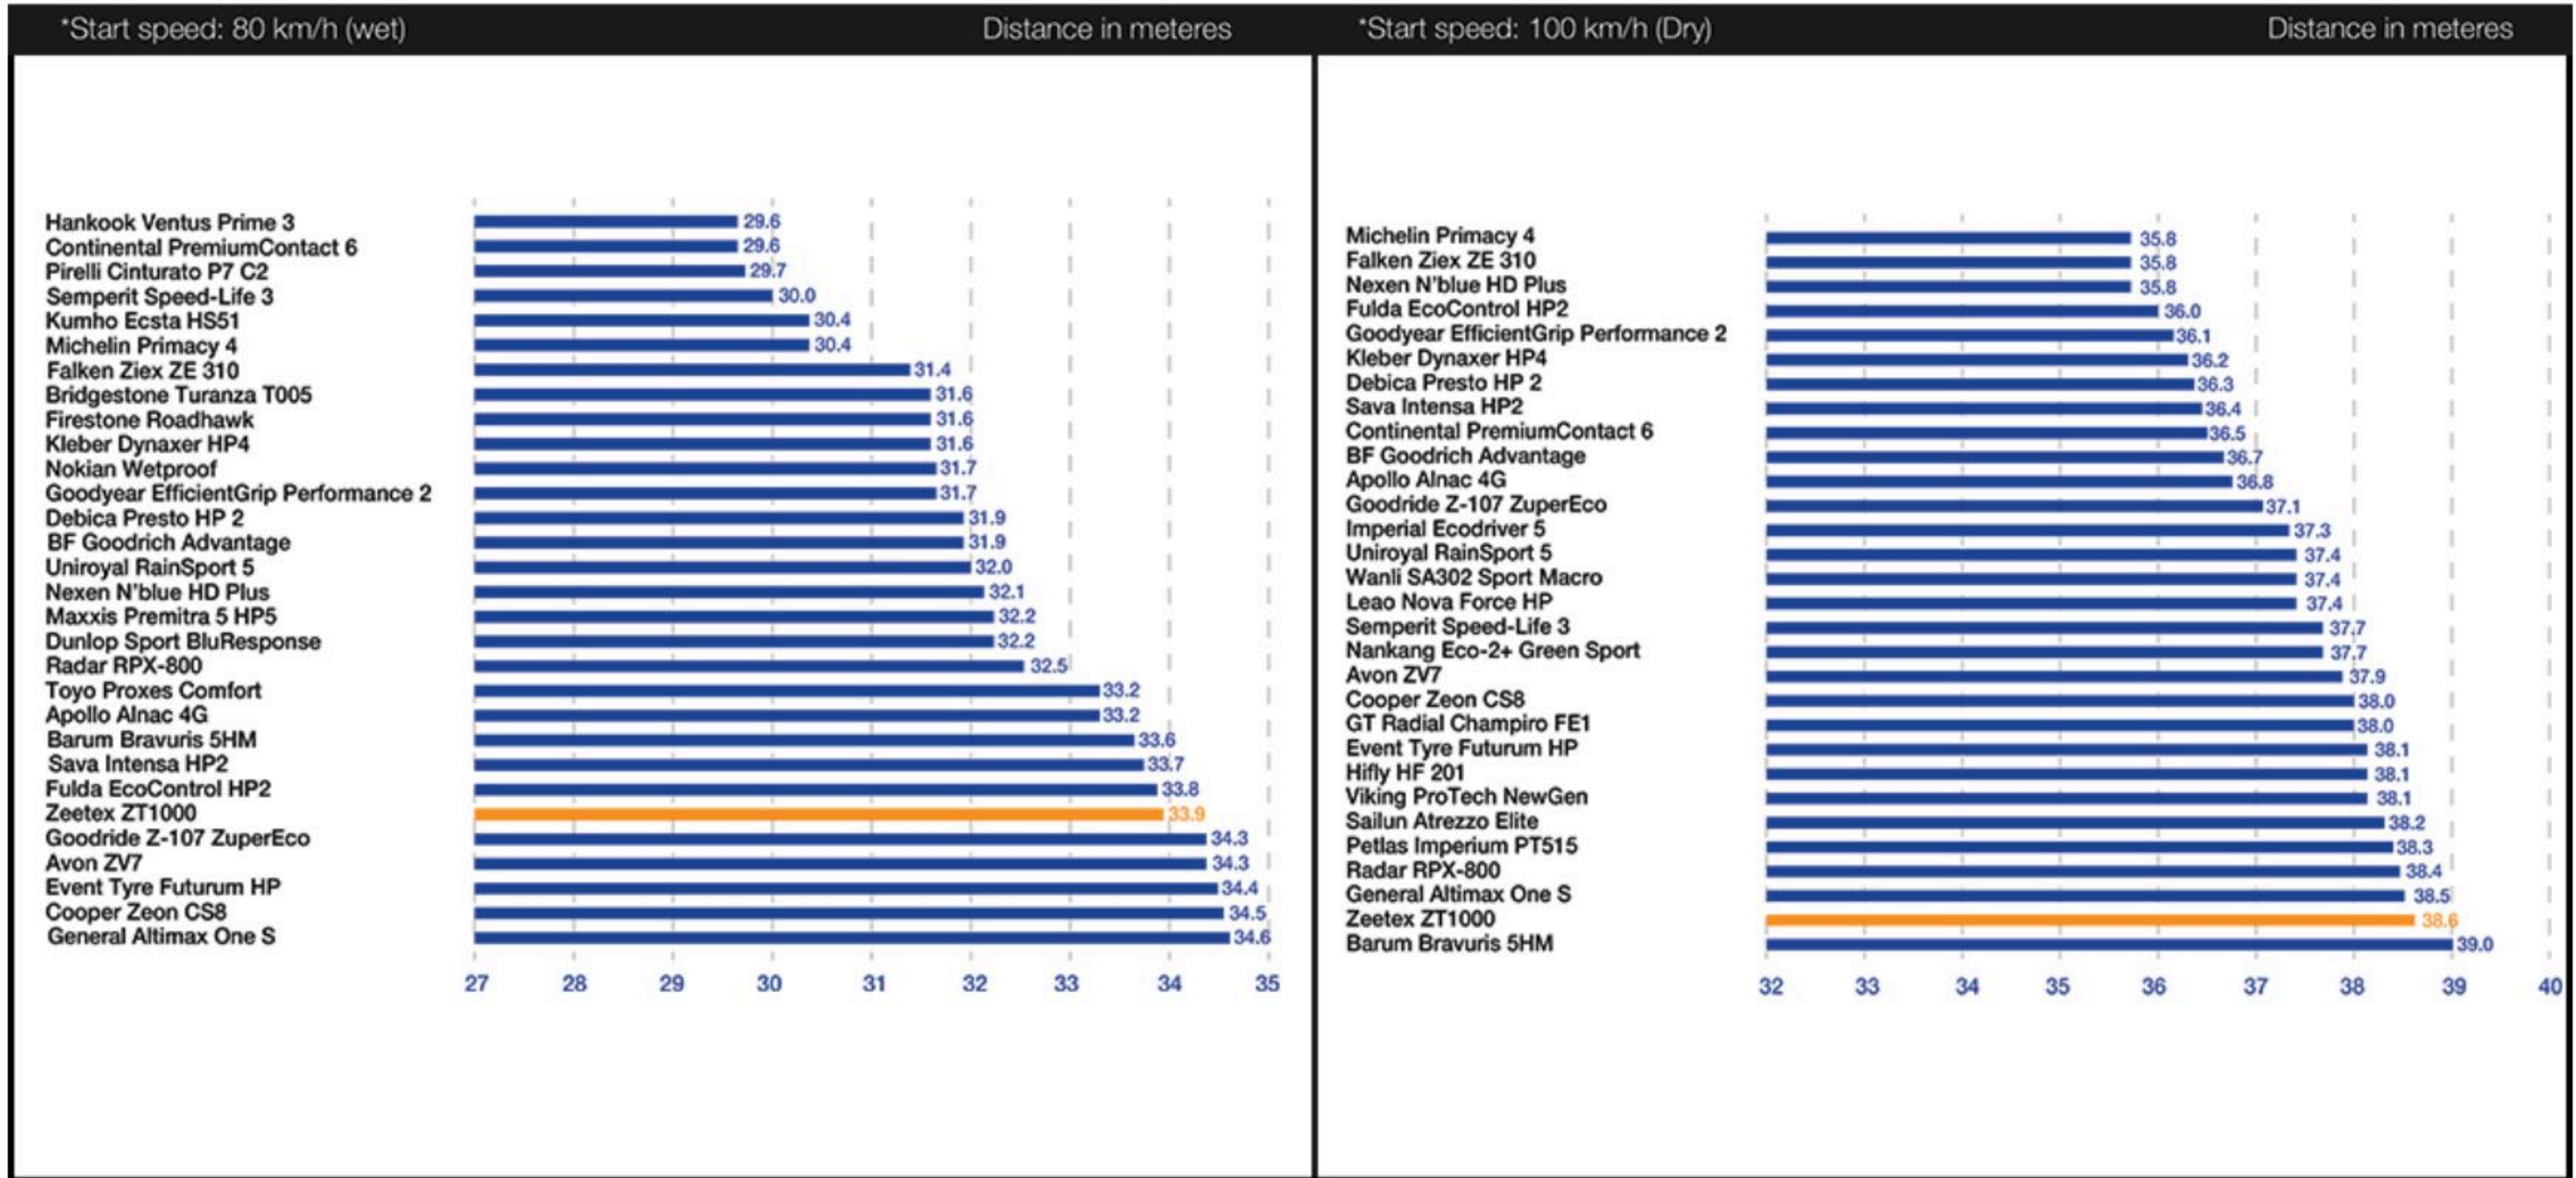

Summer Test conducted by Auto Bild – 2015

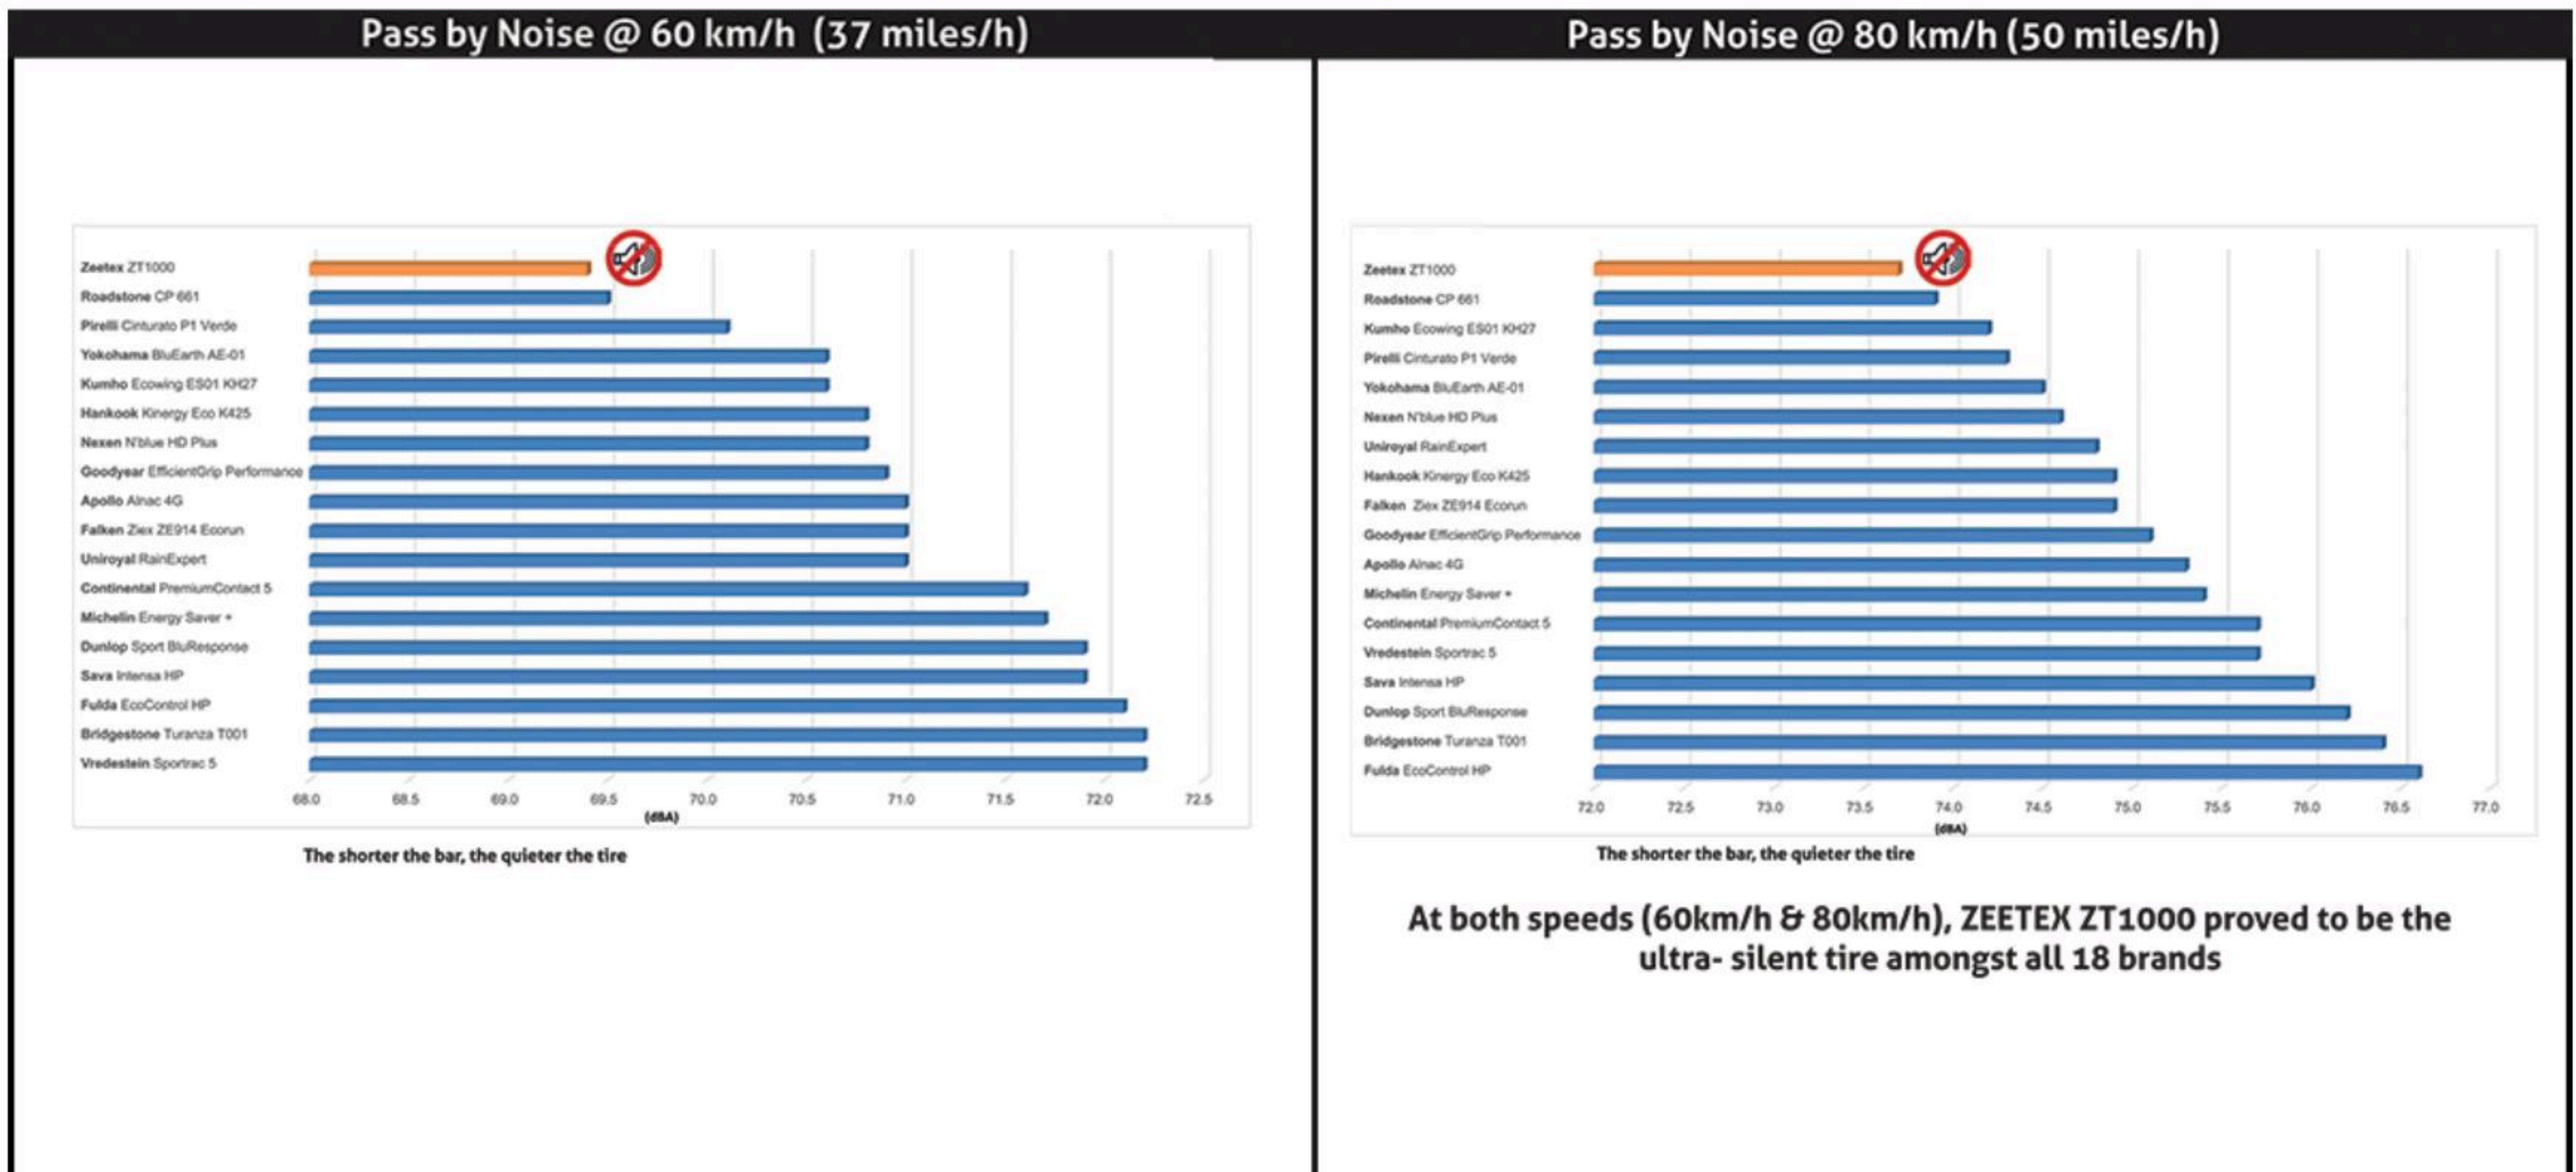

ZT1000



Rolling Resistance




Zeetex ZT1000 Pirelli Cinturato P1 Verde

ZT1000 ranked 5th for fuel efficiency; proving to be Environmental friendly

Difference in Dry Braking Distance

- Car Speed 100 km/h on dry surface
- Applying full braking on the same speed
- Measuring the braking distance

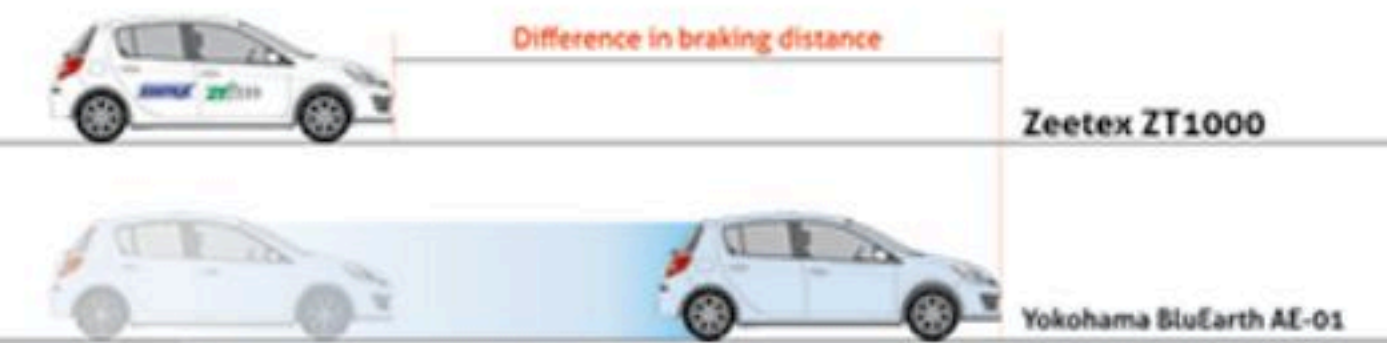


Difference in Wet Braking Distance

- Car Speed 100 km/h on 7mm water thickness
- Applying full braking on the same speed
- Measuring the braking distance




Difference between best to worst
Dry : 5.6 meters Wet : 38.1 meters

Aquaplaning

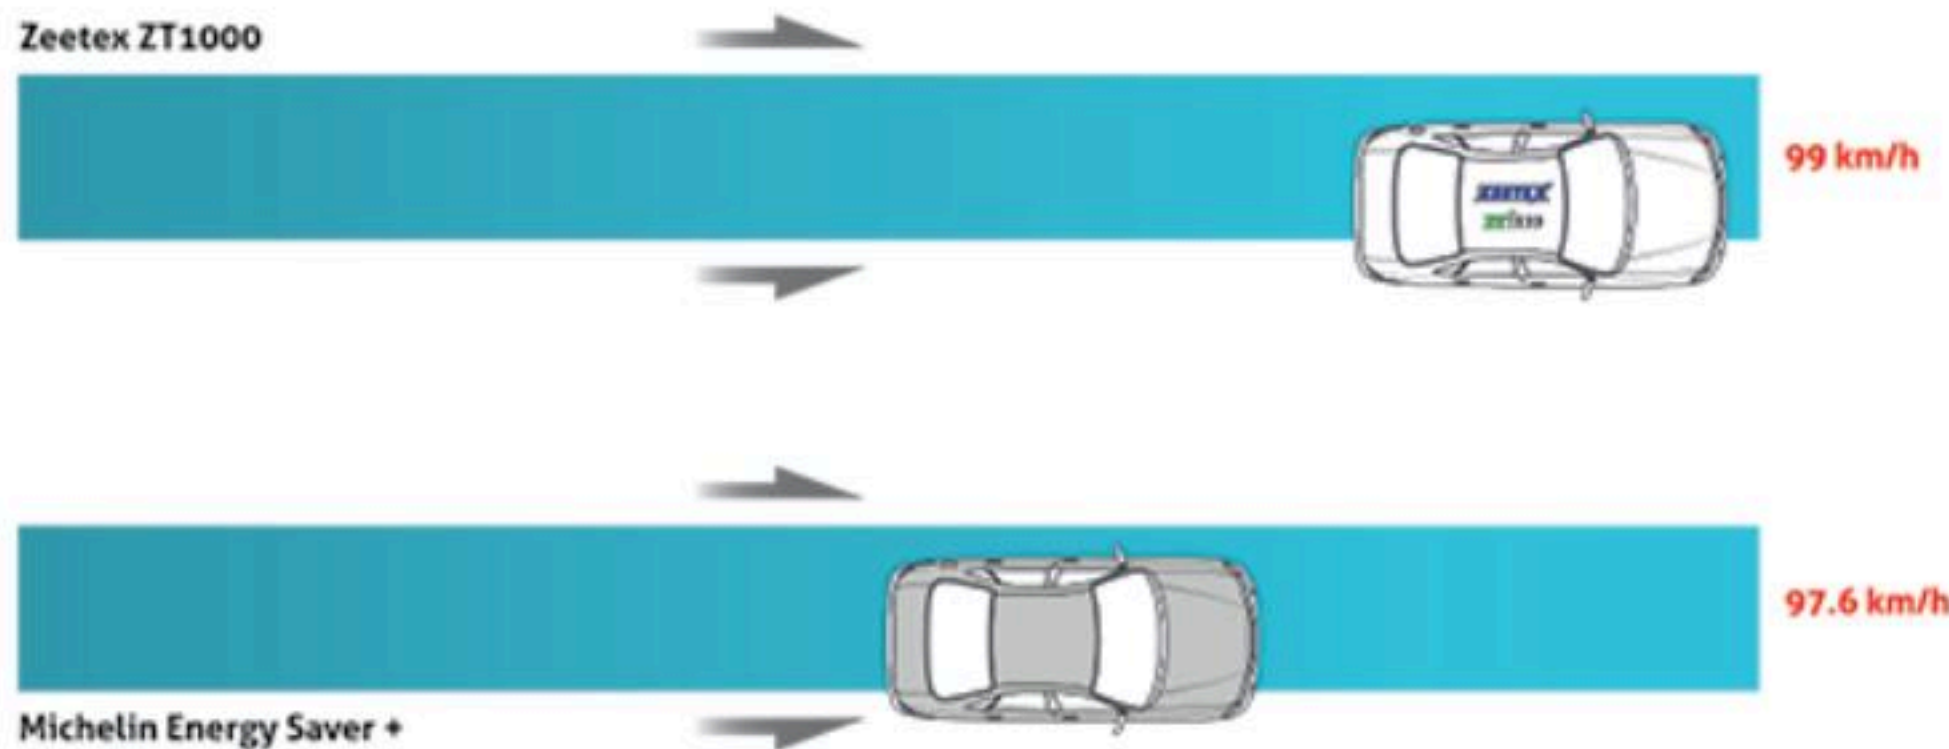

ZT1000 slipped @ 99 km/h speed; better than 9 other brands

Price vs. Mileage

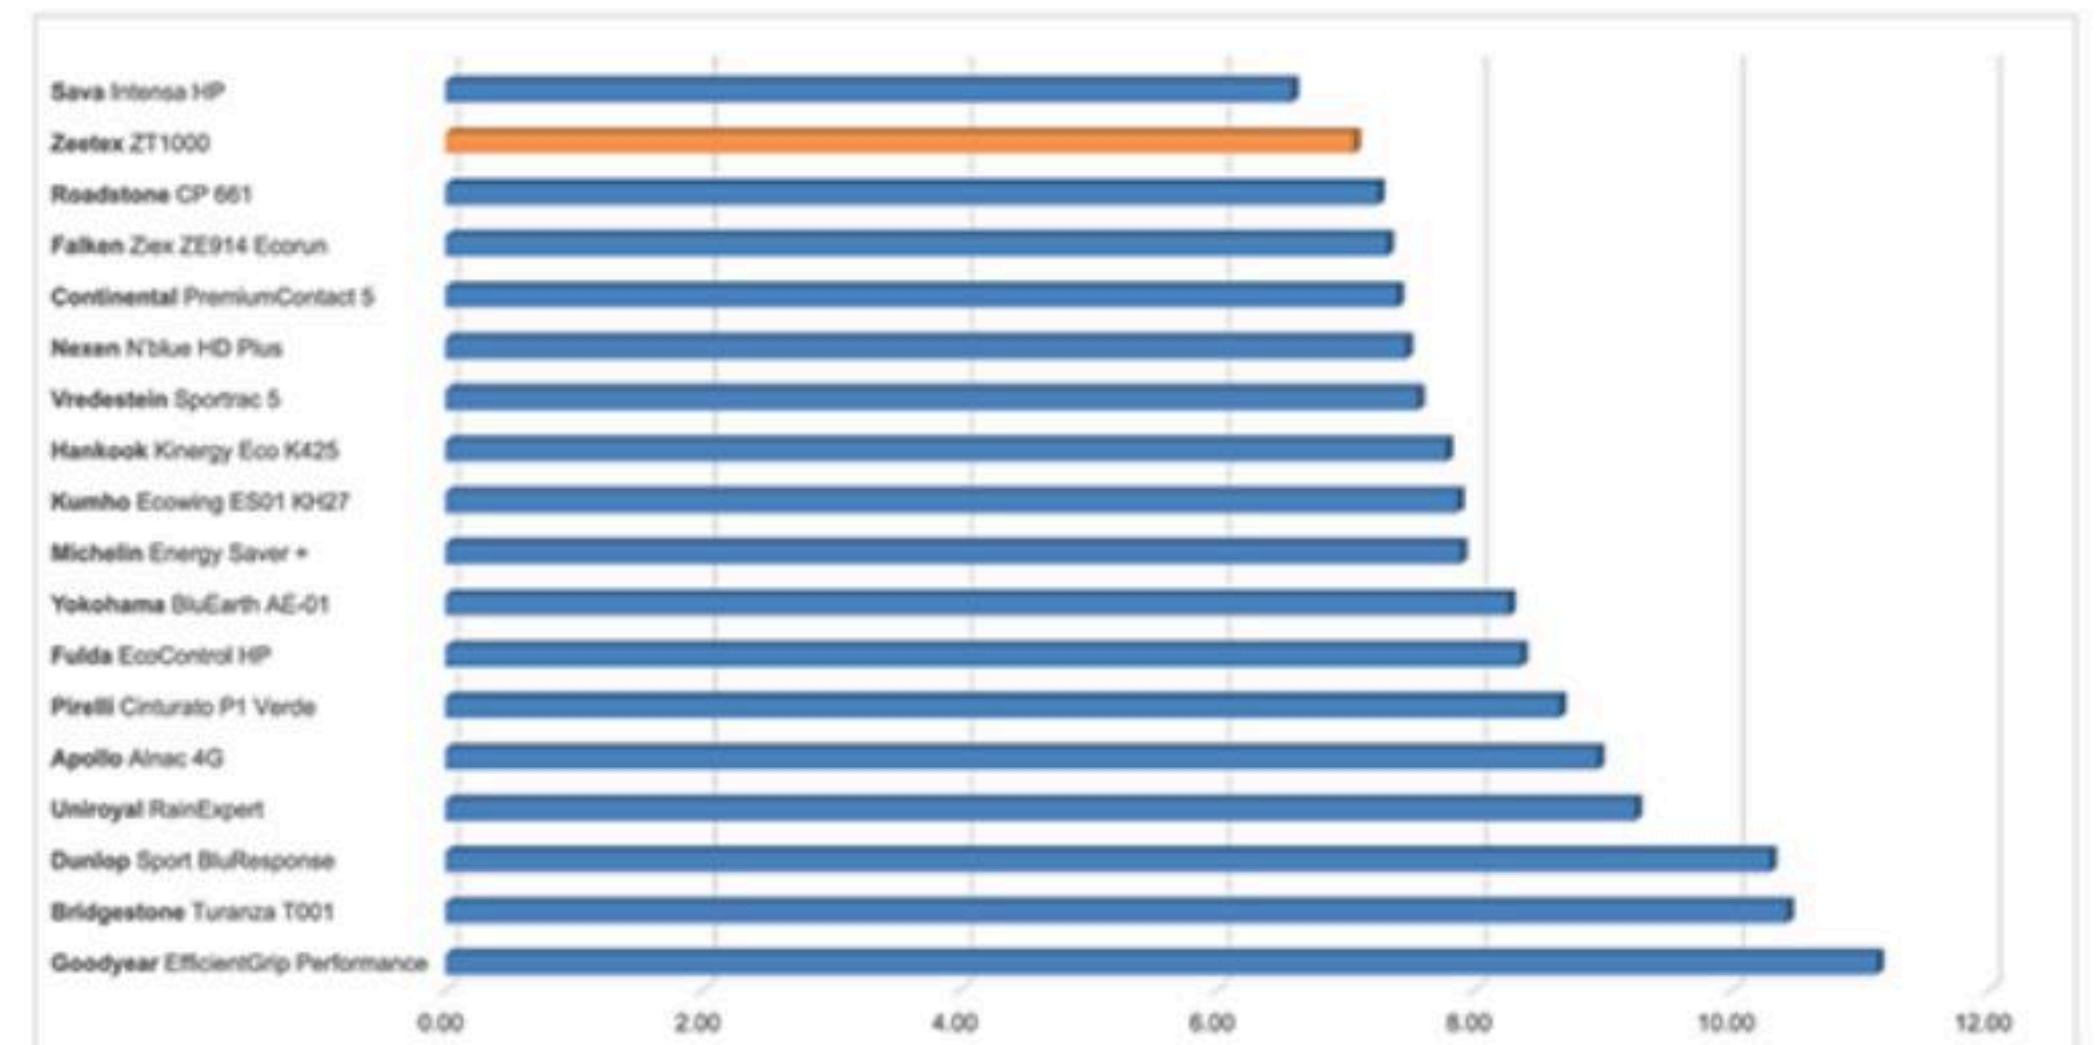

Price / Mileage – ZT1000 delivered Extra-ordinary value

ZT2000

The ZEETEX ZT2000 is designed to deliver better traction and cornering while resisting irregular wear, giving you a smooth, long-lasting, and environmentally friendly ride.



Optimal pitch variation of tread design reduces mono pitch sound and ensures better traction



Larger and curved tread blocks on outer shoulder ensure better cornering



Independent tread blocks on inner shoulders deliver better traction on wet surfaces in straight line motion



Enhanced stiffness of the tread blocks offer remarkable resistance against irregular wear, increasing tire longevity

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
80 Series	145/80R13	75T	387	44	4.0	145	562	7.0
70 Series	155/70R12	73T	365	44	4.5	157	523	7.2
	165/70R12	77T	412	44	5.0	170	537	7.4
	155/70R13	75T	387	44	4.5	157	548	7.2
	175/70R14	84T	500	44	5.0	177	602	7.4
65 Series	175/65R13	80T	450	44	5.0	177	558	7.2
	165/65R14	79T	437	44	5.0	170	570	7.2
	175/65R15	84H	500	44	5.0	177	609	7.4
	215/65R15	96H	710	44	6.5	221	661	7.8
55 Series	155/55R14	69V	325	44	5.0	162	526	7.0
	195/55R16	87V	545	44	6.0	201	620	7.4

For Passenger Cars

SUMMER RANGE UTQG 400 A A

ZT3000

The ZEETEX ZT3000 is an all-season pattern engineered to be more fuel efficient, delivering driving comfort and confident handling in all weather conditions.



Asymmetrical pattern allows balanced driving behavior in all weather conditions



Optimal pitch variation reduces road noise, creating additional driving comfort



Circumferential & lateral grooves offer exception wet grip & traction, resulting in shorter braking distance

Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
75 Series	235/75R15	109T	XL	1030	44	6.5	235	733	8.4
70 Series	175/70R13	82H		475	44	5.0	177	576	7.6
	185/70R14	88H		560	44	5.5	189	616	7.6
	195/70R14	95H	XL	690	44	6.0	201	630	7.6
	205/70R15	100H	XL	800	44	6.0	209	669	7.8
	215/70R15	98T		750	44	6.5	221	683	8.0
65 Series	165/65R13	77T		412	44	5.0	170	544	7.2
	175/65R14	82H		475	44	5.0	182	575	7.4
	185/65R14	90H	XL	600	44	5.5	189	596	7.6
	185/65R15	88H		560	44	5.5	189	621	7.6
	195/65R15	95H	XL	690	44	6.0	201	635	7.6
	205/65R15	99H	XL	775	44	6.0	209	647	7.8
	215/65R16	102H	XL	850	44	6.5	221	686	8.0
	215/65R17	98H		750	44	6.5	221	712	8.0
60 Series	175/60R13	77H		412	44	5.0	177	540	7.6
	205/60R14	88H		560	44	6.0	209	602	7.6
	185/60R15	88H	XL	560	44	5.5	189	603	7.6
	195/60R15	88H		560	44	6.0	201	615	7.6
	205/60R15	91V		615	44	6.0	209	627	7.6
	205/60R16	96H	XL	710	44	6.0	209	652	7.8
	215/60R16	99H	XL	775	44	6.5	221	664	8.0
	225/60R16	102H	XL	850	44	6.5	228	676	8.0
55 Series	205/55R16	94V	XL	670	44	6.5	214	632	7.4



ZT5000 *max*

THE NEXT-GEN PASSENGER TIRE

For Passenger Cars


SUMMER RANGE UTQG500 A A

ZT5000 max


This next-gen passenger tire offers enhanced performance during wet conditions. A closed shoulder block design allows better steering response and tire longevity.



Wide positioning of four main grooves eject water at a faster rate for improved wet grip

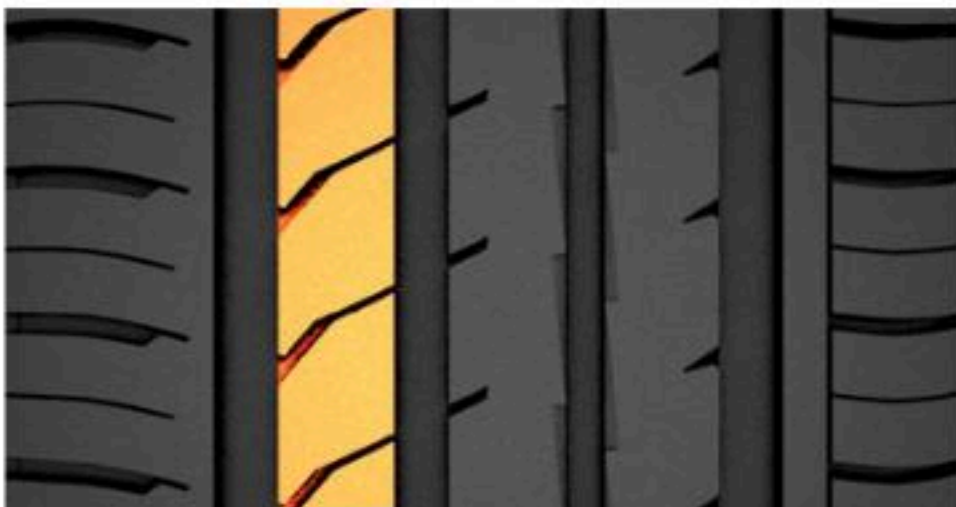

Angular sipes and rigid blocks on the inner side increase road grip and traction while cornering

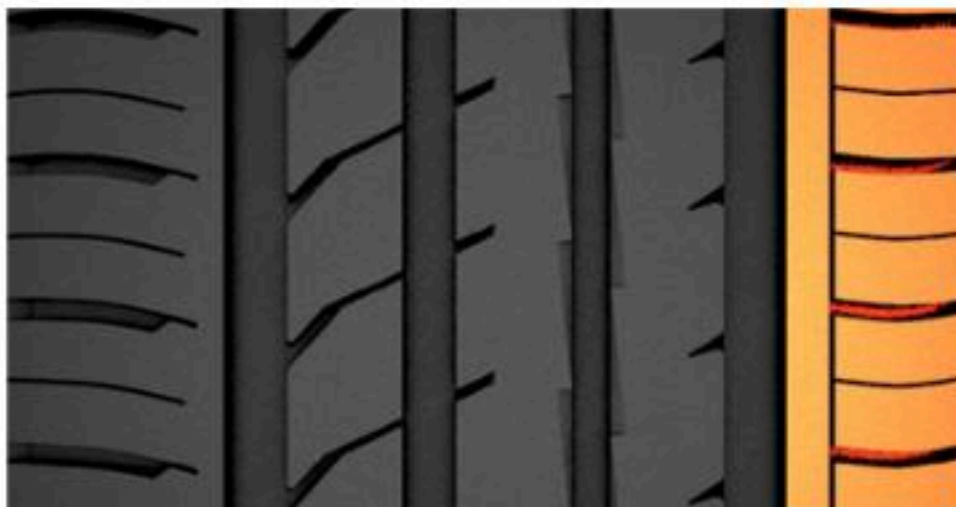

Closed shoulder blocks enhance steering response and stability while preventing irregular wear

Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
70 Series	175/70R14	88H	XL	560	50	5.0	177	602	7.6
	185/70R14	88H		560	44	5.5	189	616	7.6
	195/70R14	95H	XL	690	50	6.0	201	630	7.6
	205/70R15	96H		710	44	6.0	209	669	7.8
	215/70R15	98H		750	44	6.5	221	683	7.8
65 Series	165/65R14	79H		437	44	5.0	170	570	7.0
	175/65R14	82H		475	44	5.0	177	584	7.6
	185/65R14	86H		530	44	5.5	189	596	7.6
	185/65R15	88H		560	44	5.5	189	621	7.8
	195/65R15	91H		615	44	6.0	201	635	7.8
	205/65R15	94V		670	44	6.0	209	647	7.8
	205/65R16	95V		690	44	6.0	209	672	7.8
	215/65R16	98H		750	44	6.5	221	686	7.8
60 Series	185/60R15	84H		500	44	5.5	189	603	7.8
	195/60R15	88H		560	44	6.0	201	615	7.8
	205/60R15	91V		615	44	6.0	209	627	7.8
	195/60R16	89H		580	44	6.0	201	640	7.8
	205/60R16	92V		630	44	6.0	209	652	7.8
	215/60R16	99V	XL	775	50	6.5	221	664	7.8
	225/60R16	102V	XL	850	50	6.5	228	676	7.8
	215/60R17	96H		710	44	6.5	221	690	7.8
	225/60R17	99V		775	44	6.5	228	702	8.3

Upcoming sizes

Series	Size	Load Index / Speed Symbol
60	175/60R15	81H
55	185/55R15	82V

For Passenger Cars

SUMMER RANGE UTQG500 A A

ZT5000 max


This next-gen passenger tire offers enhanced performance during wet conditions. A closed shoulder block design allows better steering response and tire longevity.




Performance results against Tier 2 & Tier 3 brands tested in IDIADA, Spain

Tire size tested: 225/60R17 99V


Internal Noise on Smooth Road @ 37.2 mph (60 kph)

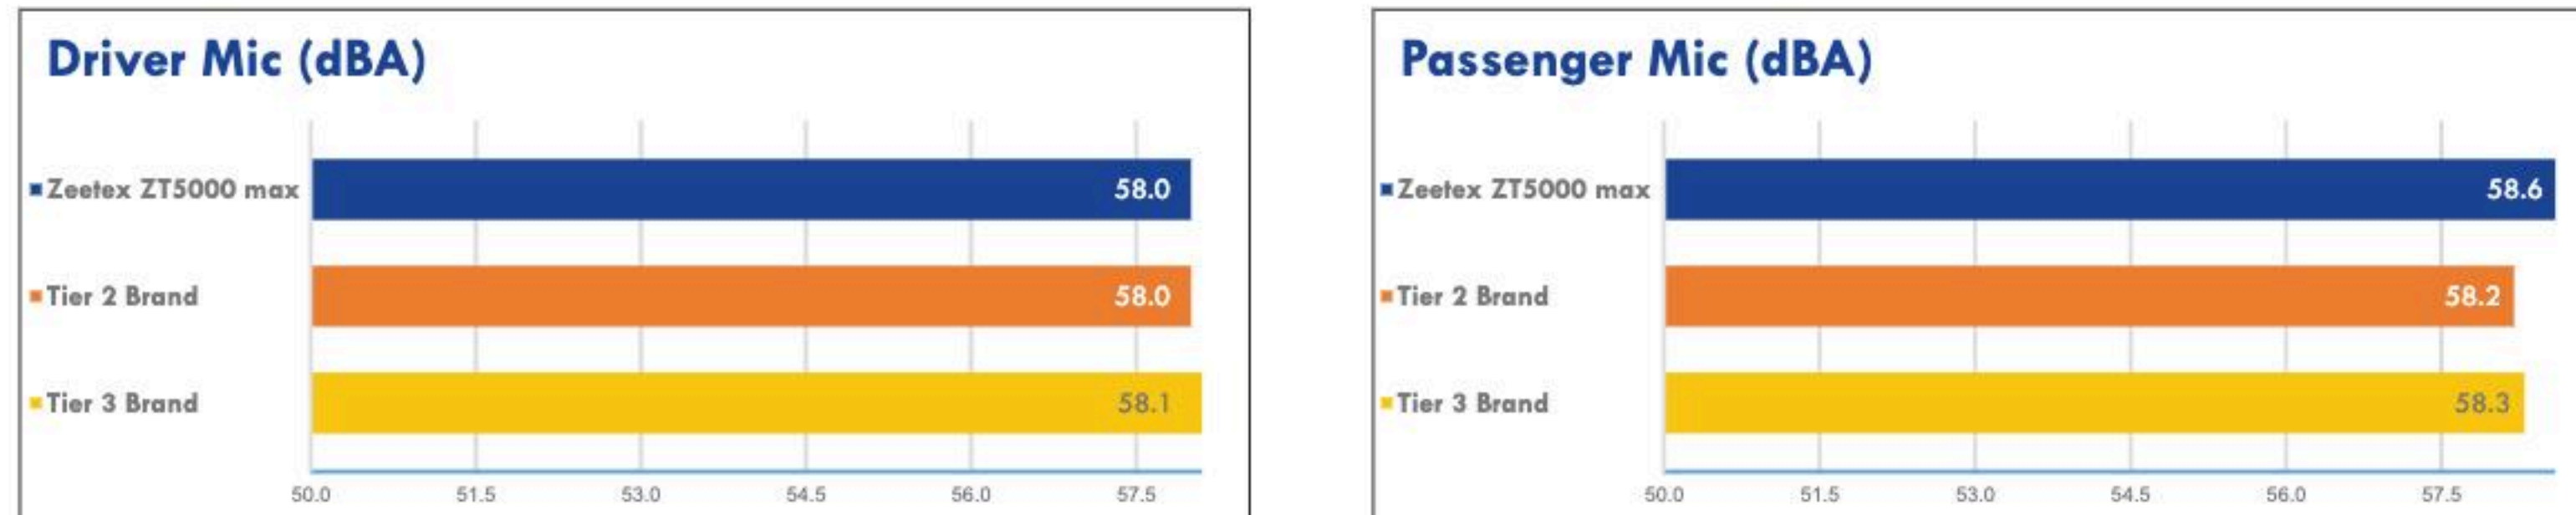


Internal Noise on Smooth Road @ 49.7 mph (80 kph)

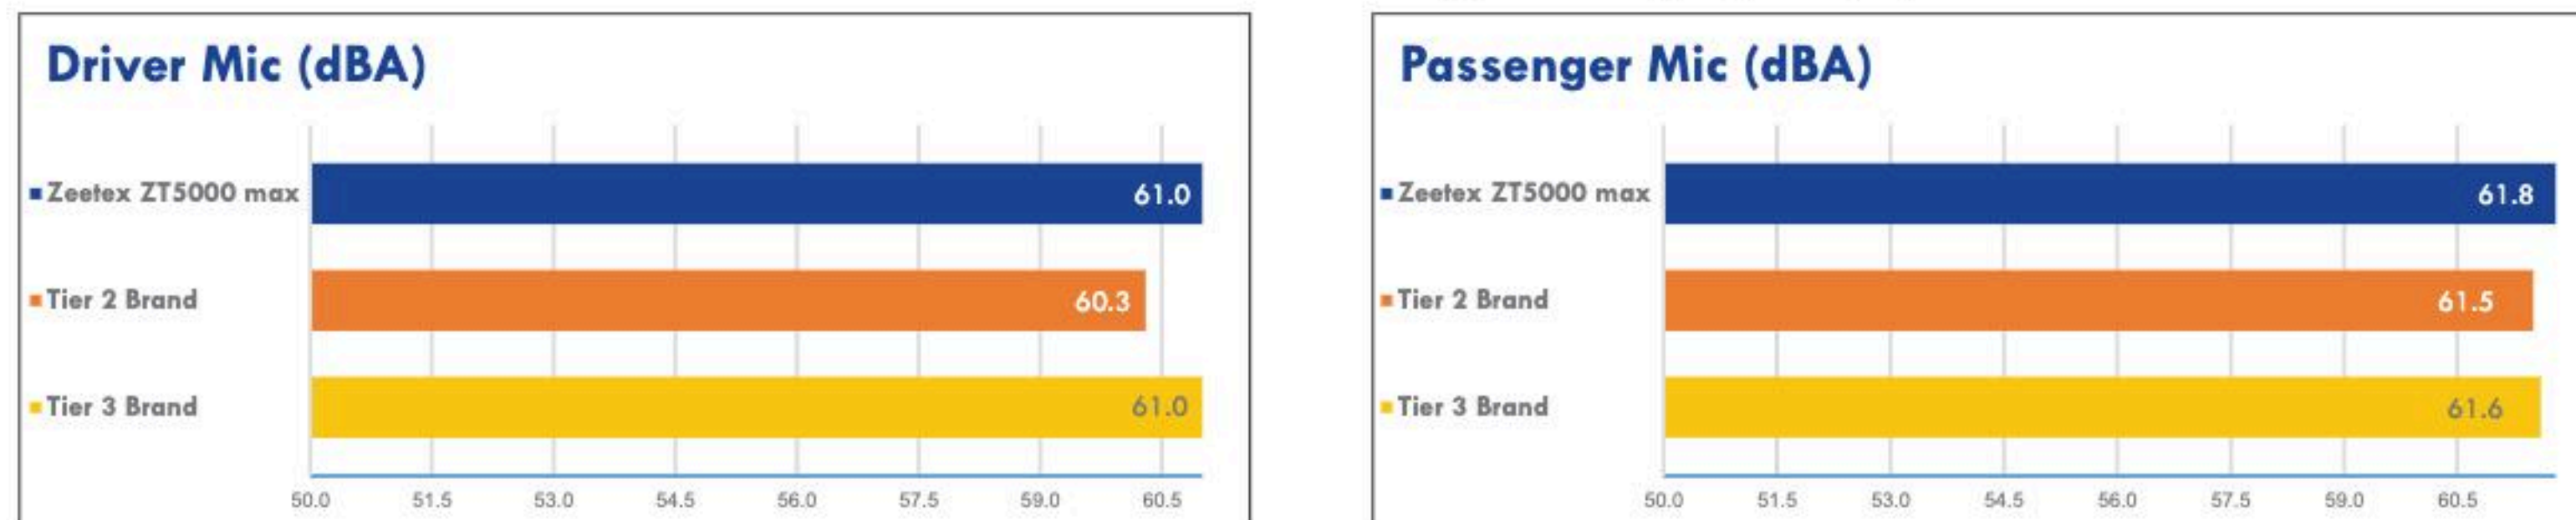

Internal Noise on Rough Road @ 37.2 mph (60 kph)

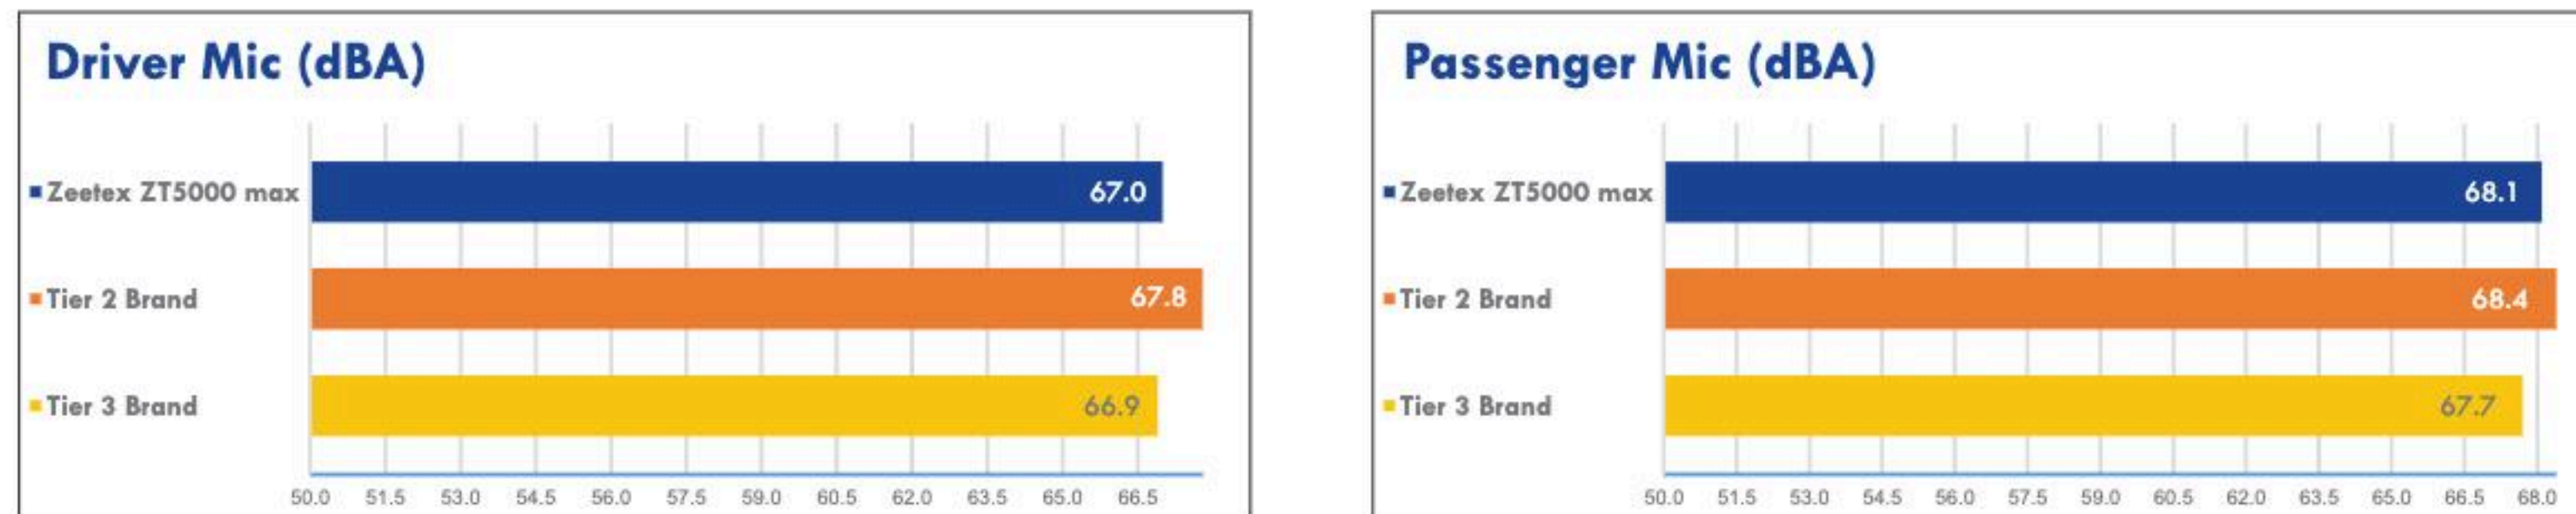


Internal Noise on Rough Road @ 49.7 mph (80 kph)

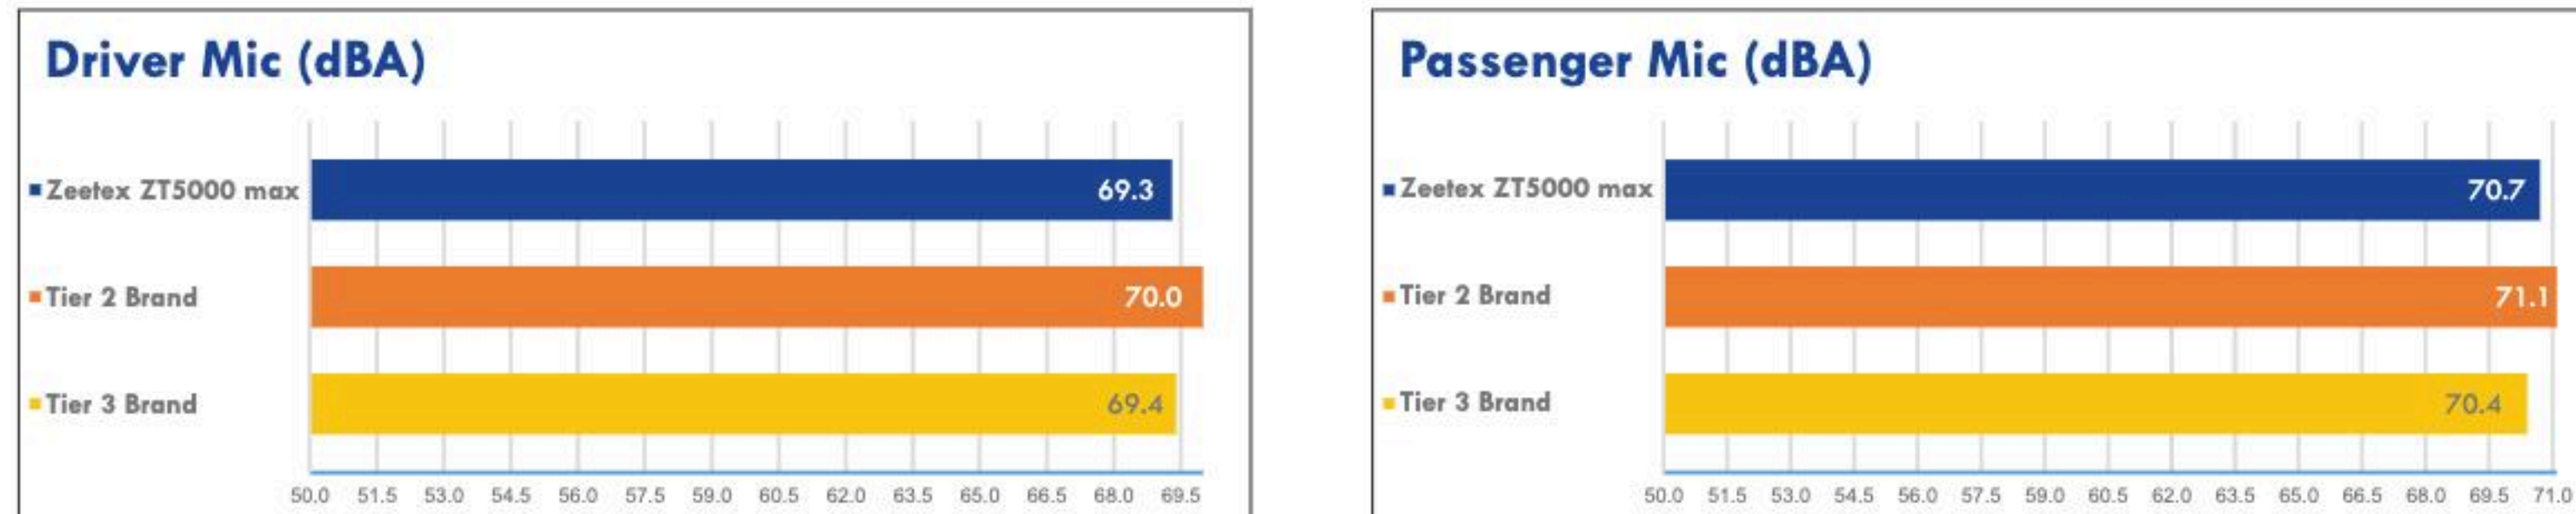


Dry Braking Distance in Feet



Dry Handling

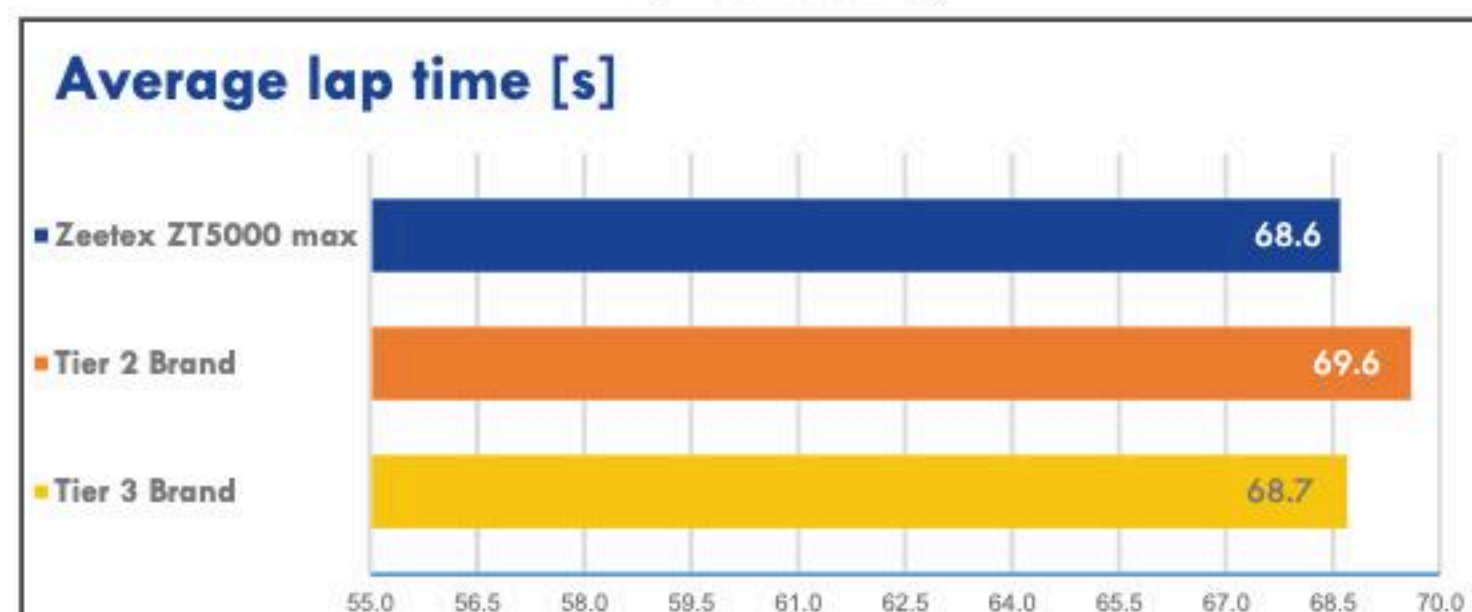

Wet Handling

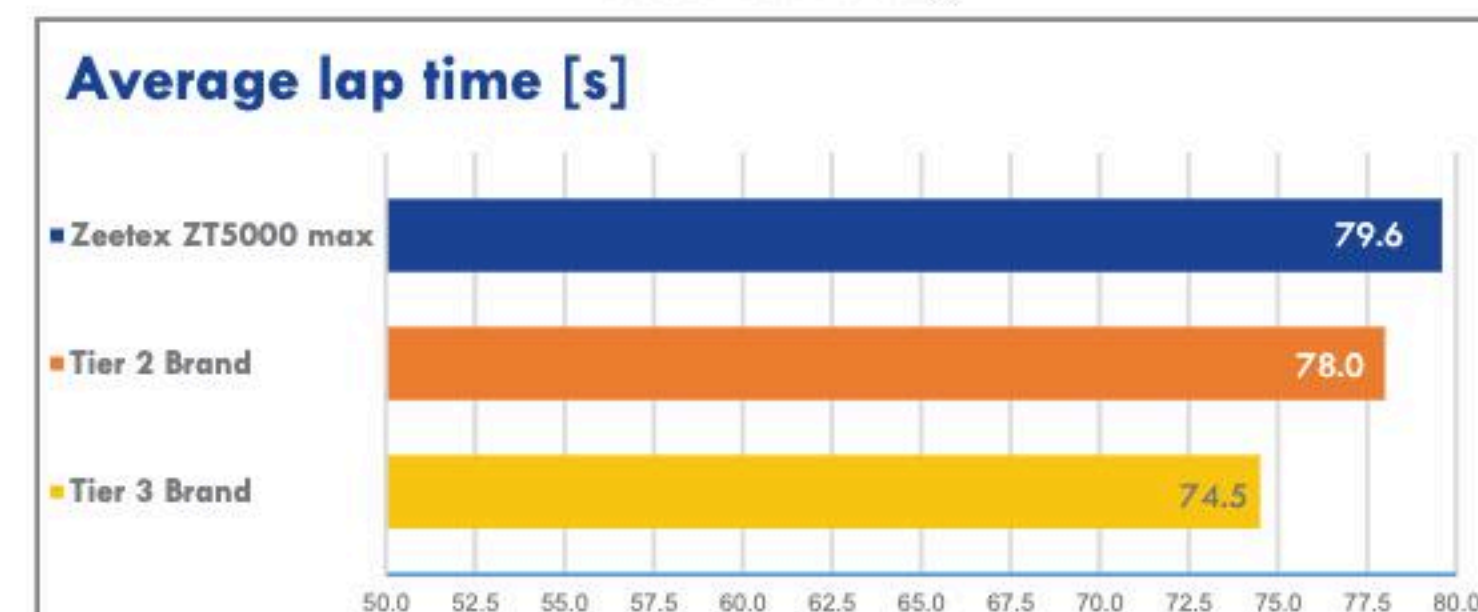


ZT6000 eco



Symmetric tread design ensures smoother rolling on the road and even treadwear throughout the tire's life




Wider grooves help in quicker dissipation of water thereby enhancing braking & stability on wet conditions

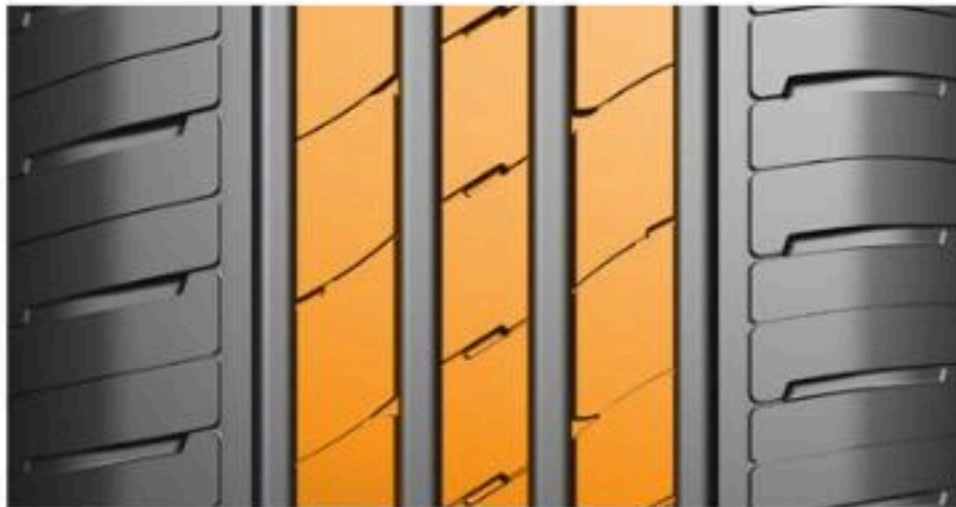

Three inner ribs & optimal pitch variation reduces road noise and improves ride comfort

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	155/70R13	75T	387	44	4.5	157	548	7.0
	165/70R13	79T	437	44	5.0	170	562	7.0
	175/70R13	82T	475	44	5.0	177	576	7.0
	165/70R14	81T	462	44	5.0	170	588	7.0
	175/70R14	84T	500	44	5.0	177	602	7.0
	185/70R14	88T	560	44	5.5	189	616	7.0
65 Series	165/65R14	79T	437	44	5.0	170	570	7.0
	175/65R14	82T	475	44	5.0	177	584	7.0
	185/65R14	86H	530	44	5.5	189	596	7.0
	175/65R15	84H	500	44	5.0	177	609	7.0
	185/65R15	88H	560	44	5.5	189	621	7.0
	195/65R15	91V	615	44	6.0	201	635	7.0
	205/65R15	94H	670	44	6.0	209	647	7.0
	215/65R16	98H	750	44	6.5	221	686	7.0
60 Series	165/60R14	75H	387	44	5.0	170	554	7.0
	185/60R14	82H	475	44	5.5	189	578	7.0
	185/60R15	84H	500	44	5.5	189	603	7.0
	195/60R15	88H	560	44	6.0	201	615	7.0
	205/60R15	91V	615	44	6.0	209	627	7.0
	205/60R16	92V	630	44	6.0	209	652	7.0
	215/60R16	95V	690	44	6.0	221	664	7.0
55 Series	185/55R15	82V	475	44	6.0	194	585	7.0
	195/55R15	85V	515	44	6.0	201	595	7.0
	195/55R16	87V	545	44	6.0	201	620	7.0
	205/55R16	91V	615	44	6.5	214	632	7.0
50 Series	195/50R15	82V	475	44	6.0	201	577	7.0

ZT6001 eco

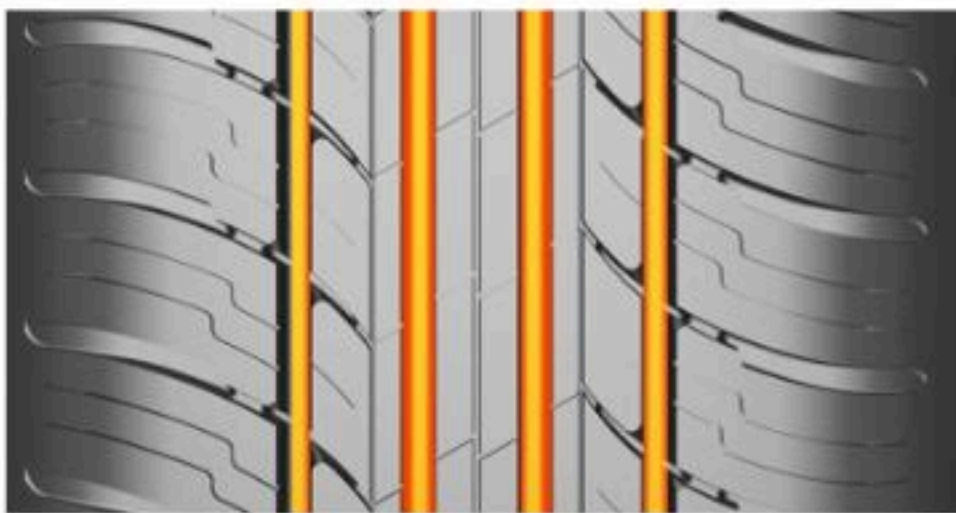

Optimized center ribs ensure precise steering, increase road grip and traction



Large shoulder blocks ensure better cornering & stability




Four main wide grooves to retain excellent dry and wet braking performance


Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	185/70R13	86T	530	44	5.5	189	590	7.0
	205/70R14	98H XL	750	50	6.0	209	644	7.0
65 Series	155/65R13	73T	365	44	4.5	157	532	7.0
	165/65R13	77T	412	44	5.0	170	544	7.0
	175/65R13	80T	450	44	5.0	177	558	7.0
60 Series	175/60R13	77T	412	44	5.0	177	576	7.0
	195/60R14	86H	530	44	6.0	201	590	7.0

For Passenger Cars
SUMMER RANGE UTQG360 A A

ZT6002 eco

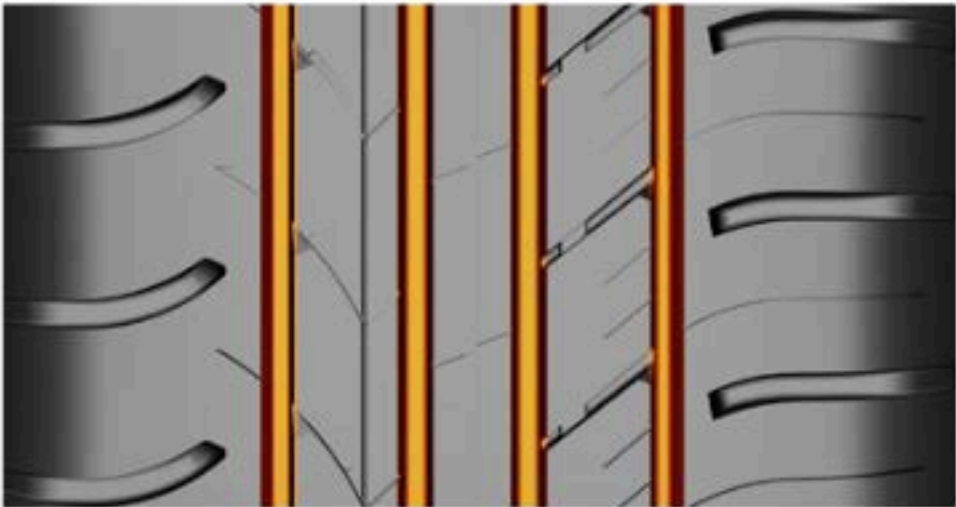

Well-positioned four grooves
for quicker water release to
improve wet grip

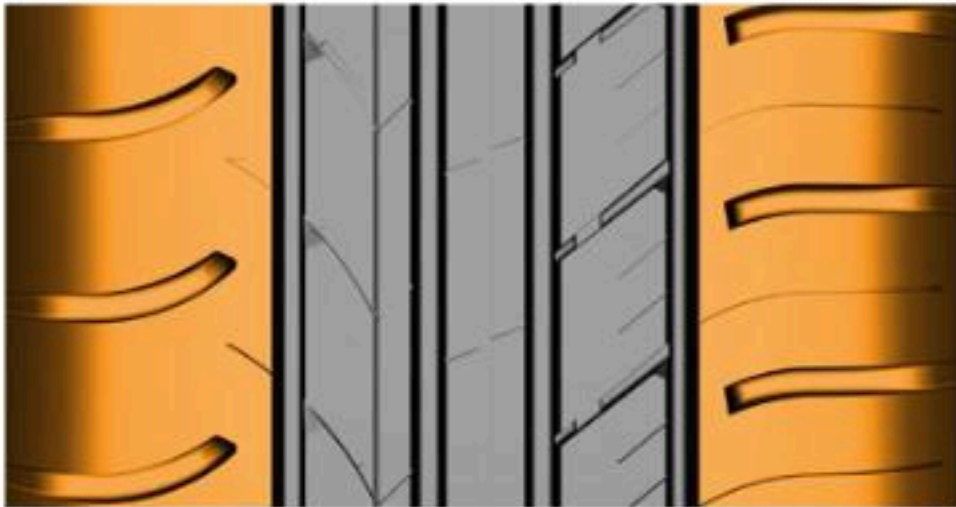

Specially designed shoulders
deliver enhanced traction &
improved cornering



Optimized pitch variation
tread design sequence for
better comfort drive


Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	215/70R15	98H	750	44	6.5	221	683	8.2

Hybrid tire compliant to EV & ICE compact city vehicles
SUMMER RANGE UTQG420 A A


EV1000 vfm



Optimized tread design formation effectively reduces road and pattern noise, thereby enhancing driving comfort

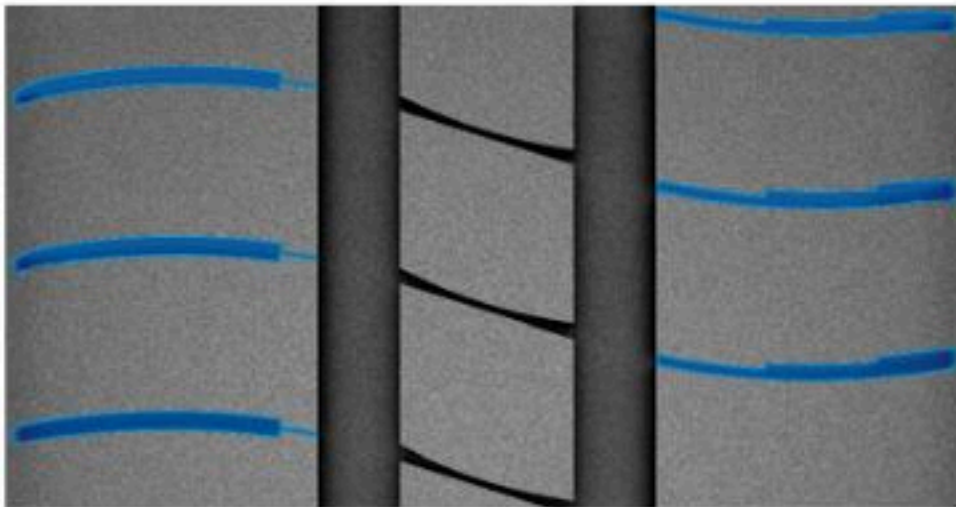

Innovative shoulder block design enhances water evacuation, resulting in a smoother ride on wet surfaces by effectively channeling water away, this design minimizes the risk of aquaplaning and significantly improves traction

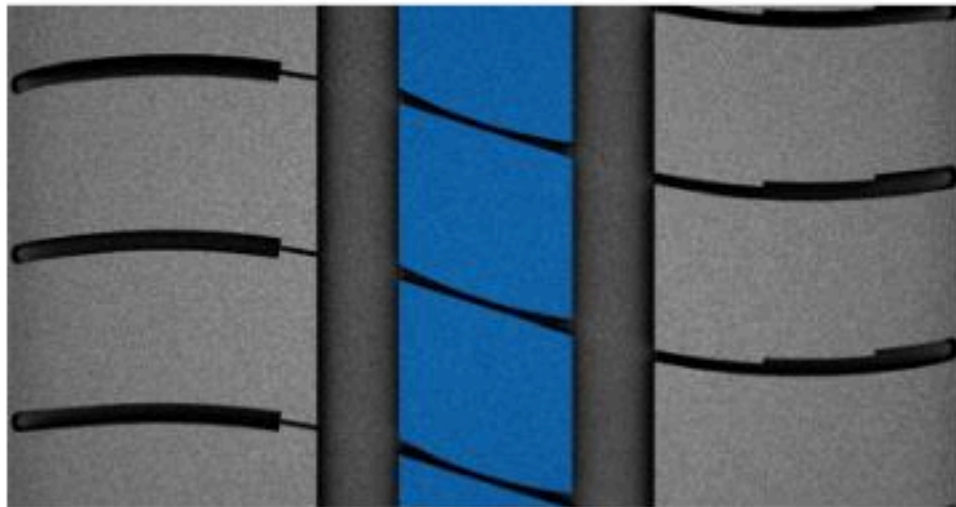

Two broad circumferential grooves to provide improved handling performance, comfort, and stability

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
60 Series	155/60R15	74T	375	44	4.5	157	567	6.2

For High-performance and Luxury Vehicles

SUMMER RANGE UTQG400 A A

HP1000

The ZEETEX HP1000 is designed for superior driving performance and optimized handling and steering accuracy, offering you a controlled and confident ride.



Serrations on the groove wall reduce pipe resonance noise making it an ultra-silent tire



Wide circumferential & lateral grooves offer outstanding resistance against aquaplaning



Asymmetric tread design & solid shoulder blocks allow quick response during turns at high speed

Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
60 Series	235/60R18	107V	XL	975	44	7.0	240	739	8.2
55 Series	195/55R15	89V	XL	580	44	6.0	201	595	7.4
	205/55R15	88V		560	44	6.5	214	607	7.4
	205/55ZR16	91W		615	44	6.5	214	632	8.0
	215/55ZR16	97W	XL	730	44	7.0	226	642	8.0
	225/55ZR16	99W	XL	775	44	7.0	233	654	7.8
	215/55ZR17	94W		670	44	7.0	226	668	8.0
	225/55R17	97V		730	44	7.0	233	680	7.8
50 Series	195/50R16	88V	XL	560	44	6.0	201	602	7.2
	205/50ZR16	87W		545	44	6.5	214	612	8.0
	205/50ZR17	93W	XL	650	44	6.5	214	638	8.0
	215/50ZR17	95W	XL	690	44	7.0	226	648	7.6
	225/50ZR17	94W		670	44	7.0	233	658	7.8
	225/50R18	99V	XL	775	44	7.0	240	739	7.8
	235/50ZR18	97W		730	44	7.5	245	693	8.0
45 Series	205/45ZR16	87W	XL	545	44	7.0	206	590	8.0
	205/45ZR17	88W	XL	560	44	7.0	206	616	7.8
	215/45ZR17	91W	XL	615	44	7.0	213	626	7.6
	225/45ZR17	94W	XL	670	44	7.5	225	634	7.6
	235/45ZR17	97W	XL	730	44	8.0	235	644	7.8
	245/45ZR17	95W		690	44	8.0	243	652	8.2
	225/45ZR18	95Y	XL	690	44	7.5	225	651	7.6
	245/45ZR18	100Y	XL	800	44	8.0	243	677	8.0
	245/45ZR19	102Y	XL	850	44	8.0	243	703	8.0
40 Series	205/40ZR17	84W	XL	500	44	7.5	212	596	7.6
	245/40ZR17	91W		615	44	8.5	241	620	8.0
	225/40ZR18	92Y	XL	630	44	8.0	230	637	7.6
	235/40ZR18	95Y	XL	690	44	8.5	241	645	7.8
	245/40ZR18	97Y	XL	730	44	8.5	248	653	8.0
	245/40ZR19	98Y	XL	750	44	8.5	248	679	8.0
	255/40ZR19	100Y	XL	800	44	9.0	260	687	8.2
	275/40ZR19	105Y	XL	925	44	9.5	278	703	8.4
	245/40ZR20	99Y	XL	775	44	8.5	248	704	8.0

For High-performance and Luxury Vehicles

SUMMER RANGE UTQG400 A A

HP1000

The ZEETEX HP1000 is designed for superior driving performance and optimized handling and steering accuracy, offering you a controlled and confident ride.



Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
35 Series	215/35ZR18	84W	XL	500	44	7.5	218	607	7.8
	265/35ZR18	97W	XL	730	44	9.5	248	653	8.2
	275/35ZR18	99Y	XL	775	44	9.5	278	649	8.4
	225/35ZR19	88Y	XL	560	44	8.0	230	641	7.8
	235/35ZR19	91Y	XL	615	44	8.5	241	647	7.6
	245/35ZR19	93Y	XL	650	44	8.5	248	655	8.0
	255/35ZR19	96Y	XL	710	44	9.0	260	661	8.0
	265/35ZR19	98Y	XL	750	44	9.5	271	669	8.2
	225/35ZR20	93Y	XL	650	44	8.0	230	666	7.8
	245/35ZR20	95Y	XL	690	44	8.5	248	680	8.0
	255/35ZR20	97Y	XL	730	44	9.0	260	686	8.0
	275/35ZR20	102Y	XL	850	44	9.5	278	700	8.4
30 Series	285/30ZR19	98Y	XL	750	44	10.0	290	655	8.2

For High-performance and Luxury Vehicles

SUMMER RANGE UTQG 280 A A

HP2000 vfm



Serrations on the groove wall reduce pipe resonance noise making it an ultra-silent tire



Unique shoulder blocks enhance vehicle stability during high speed cornering



Specially engineered inner ribs ensure precise steering, optimal footprint and steadiness in longitudinal drive

Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
60 Series	215/60R17	96H		710	44	6.5	221	690	7.9
55 Series	205/55R15	88V		560	44	6.5	214	607	7.9
	195/55R16	91V	XL	615	50	6.0	201	620	7.9
	215/55R16	97Y	XL	730	50	7.0	226	642	7.9
	225/55R16	99Y	XL	775	50	7.0	233	654	7.9
	205/55R17	95W	XL	690	50	6.5	214	658	7.9
	215/55R17	98W	XL	750	50	7.0	226	668	7.9
	225/55R17	101W	XL	825	50	7.0	233	680	7.9
50 Series	195/50R16	88V	XL	560	50	6.0	201	602	7.9
	205/50R16	91W	XL	615	50	6.5	214	612	7.9
	205/50R17	93W	XL	650	50	6.5	214	638	7.9
	215/50R17	95V	XL	690	50	7.0	226	648	7.9
	215/50R17	95W	XL	690	50	7.0	226	648	7.9
	225/50R17	98Y	XL	750	50	7.0	233	658	7.9
	225/50R18	95V		690	44	7.0	233	683	7.9
	235/50R18	101W	XL	825	50	7.5	245	693	7.9
45 Series	205/45R16	87W	XL	545	50	7.0	206	590	7.9
	215/45R16	90W	XL	600	50	7.0	213	600	7.9
	205/45R17	88W	XL	560	50	7.0	206	616	7.9
	215/45R17	91W	XL	615	50	7.0	213	626	7.9
	225/45R17	91Y		615	44	7.5	225	634	7.9
	225/45R17	94Y	XL	670	50	7.5	225	634	7.9
	235/45R17	97Y	XL	730	50	8.0	236	644	7.9
	245/45R17	99Y	XL	775	50	8.0	243	652	7.9
	215/45R18	93Y	XL	650	50	7.0	213	651	7.9
	225/45R18	95Y	XL	690	50	7.5	225	659	7.9
	235/45R18	98Y	XL	750	50	8.0	236	669	7.9
	245/45R18	100Y	XL	800	50	8.0	243	677	7.9
40 Series	195/40R17	81H	XL	462	42	8.0	200	588	7.5
	195/40R17	81W	XL	462	50	8.0	200	588	7.5
	205/40R17	84W	XL	500	50	7.5	212	596	7.9
	215/40R17	87Y	XL	545	50	7.5	218	604	7.9
	245/40R17	95Y	XL	690	50	8.5	248	628	7.9

For High-performance and Luxury Vehicles

SUMMER RANGE UTQG 280 A A

HP2000 vfm



Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
40 Series	215/40R18	89W	XL	580	50	7.5	218	629	7.5
	225/40R18	92Y	XL	630	50	8.0	230	637	7.9
	235/40R18	95Y	XL	690	50	8.5	241	645	7.9
	245/40R18	97Y	XL	730	50	8.5	248	653	7.9
	245/40R19	98W	XL	750	50	8.5	248	679	7.9
35 Series	215/35R18	84Y	XL	500	50	7.5	218	607	7.9
	255/35R18	94Y	XL	670	50	9.0	260	635	7.9
	265/35R18	97Y	XL	730	50	9.5	271	643	7.9
	215/35R19	85Y	XL	515	50	7.5	218	633	7.5
	225/35R19	88Y	XL	560	50	8.0	230	641	7.9
	245/35R19	93Y	XL	650	50	8.5	248	655	7.9

For High-performance and Luxury Vehicles

SUMMER RANGE UTQG 280 A A


HP2000 vfm



Summer Test conducted by Auto Bild – 2020


*Start speed: 80 km/h (wet)

Distance in meters

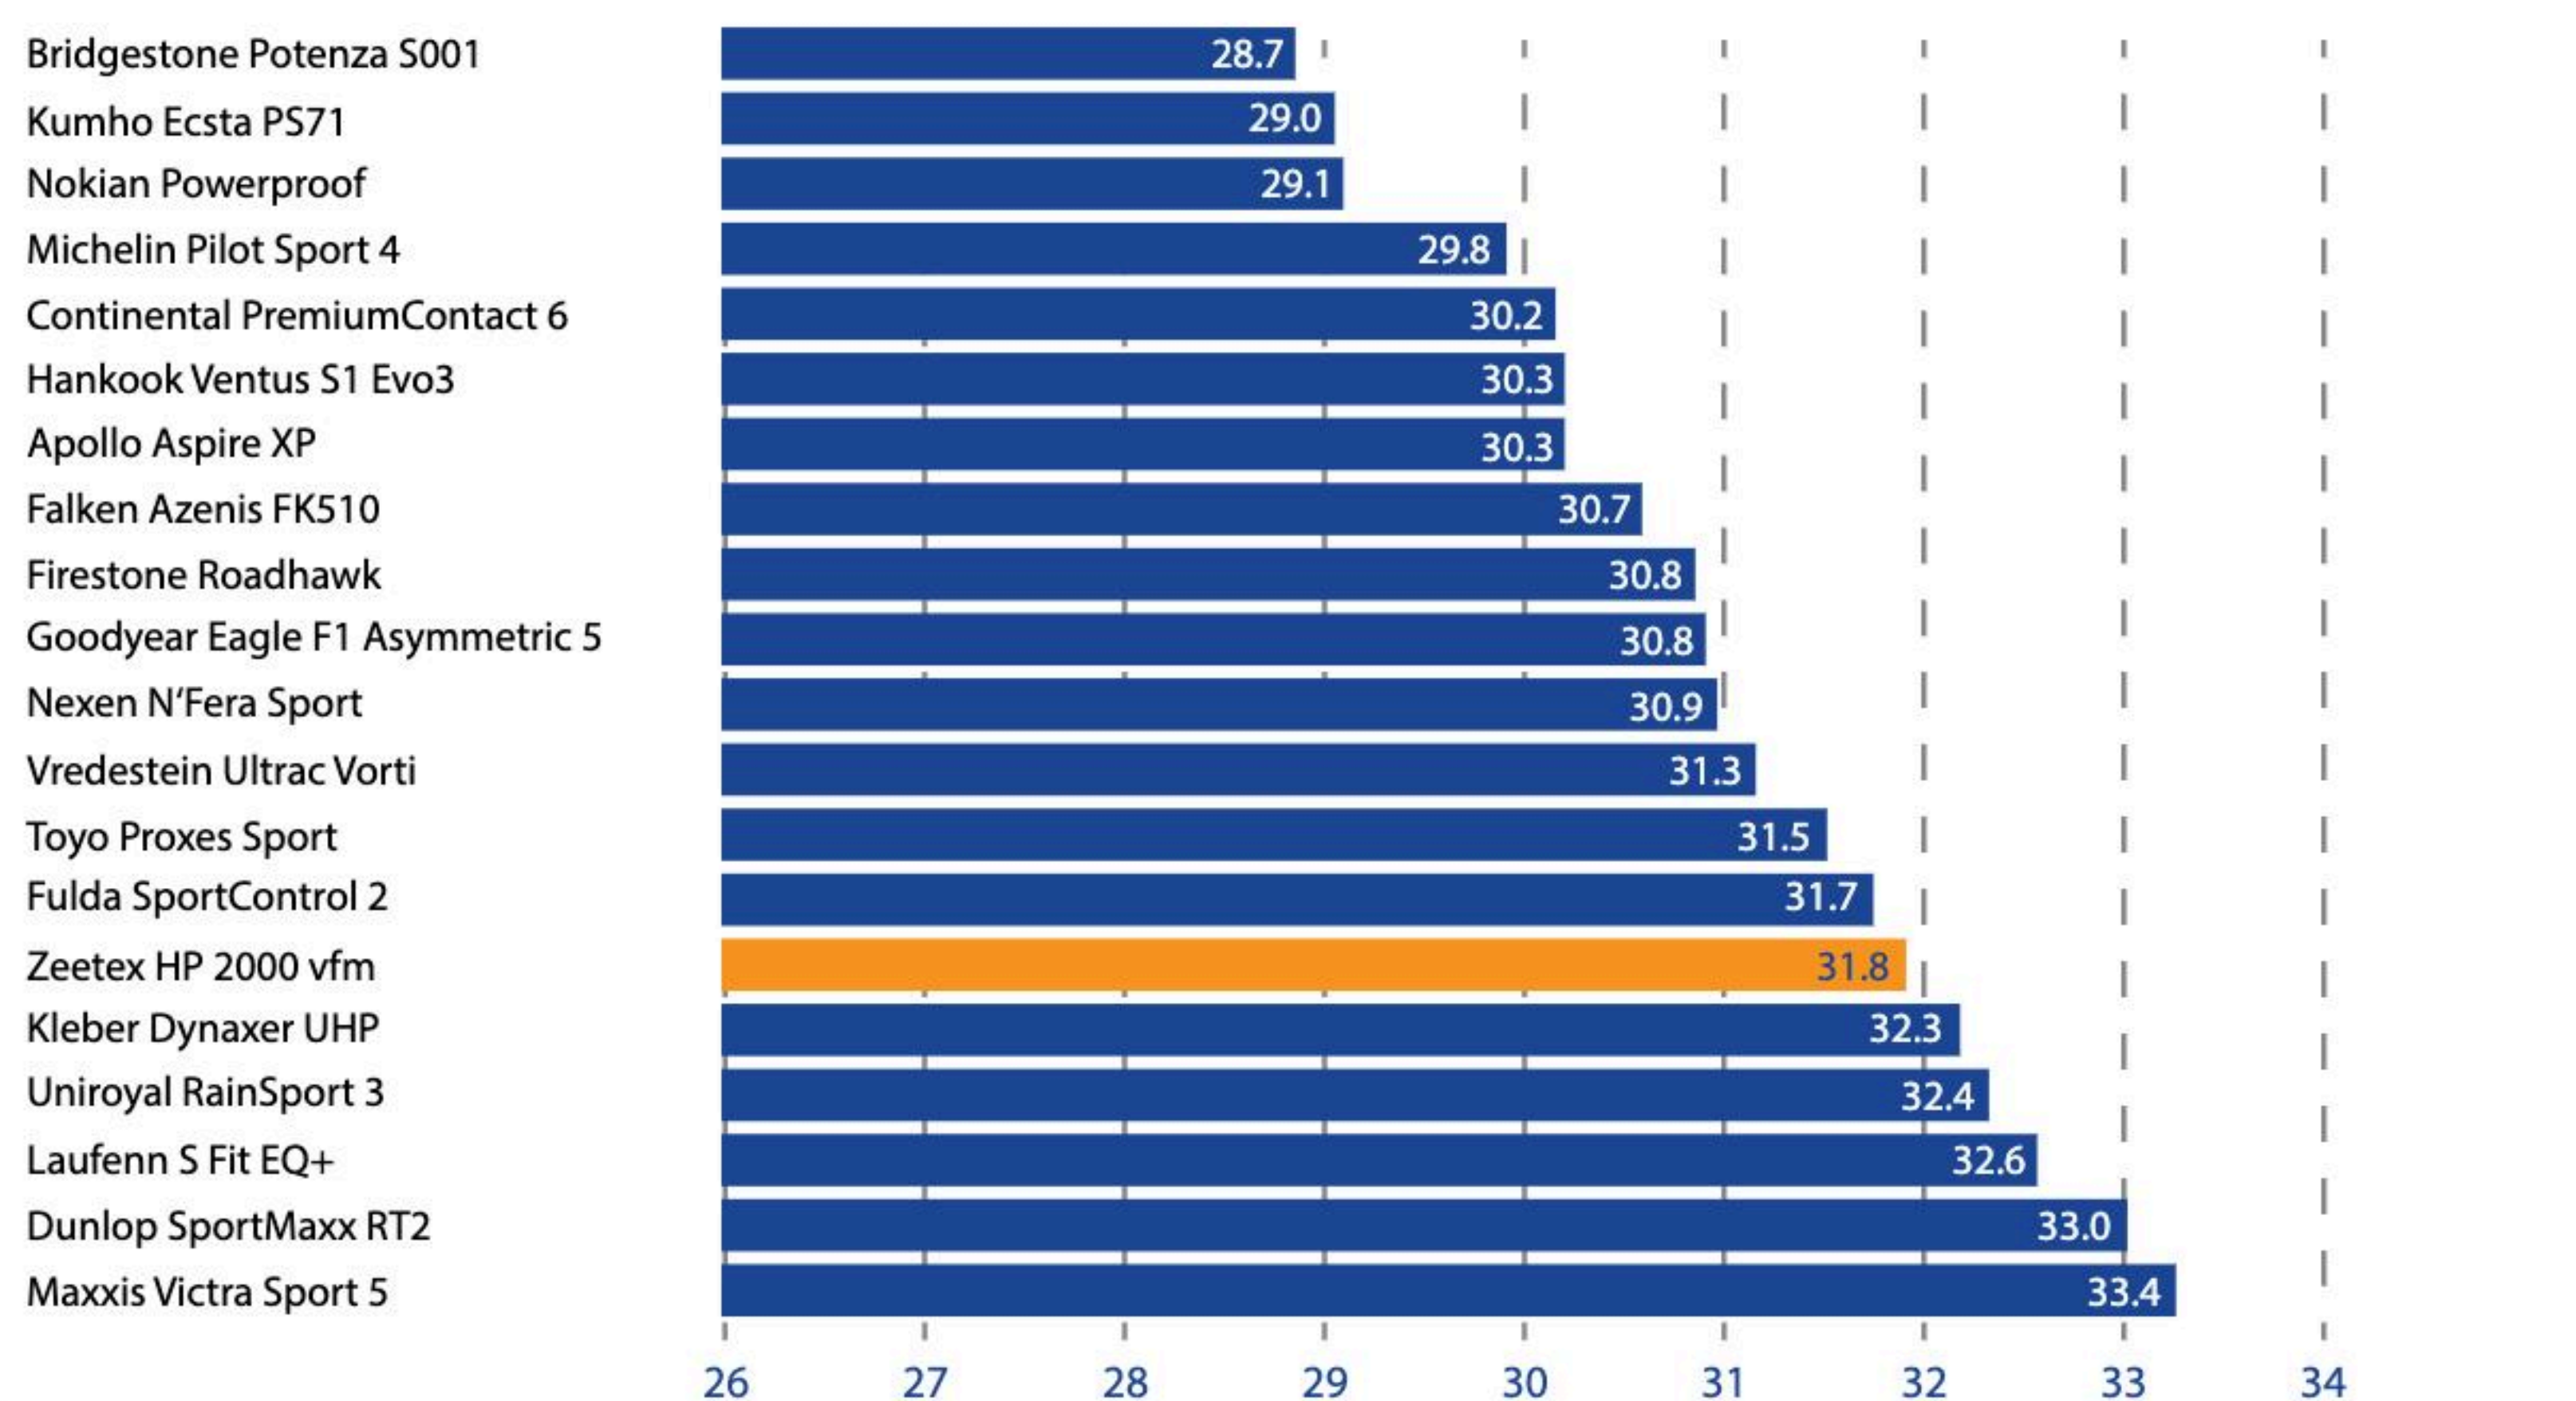

*Start speed: 100 km/h (Dry)

Distance in meters

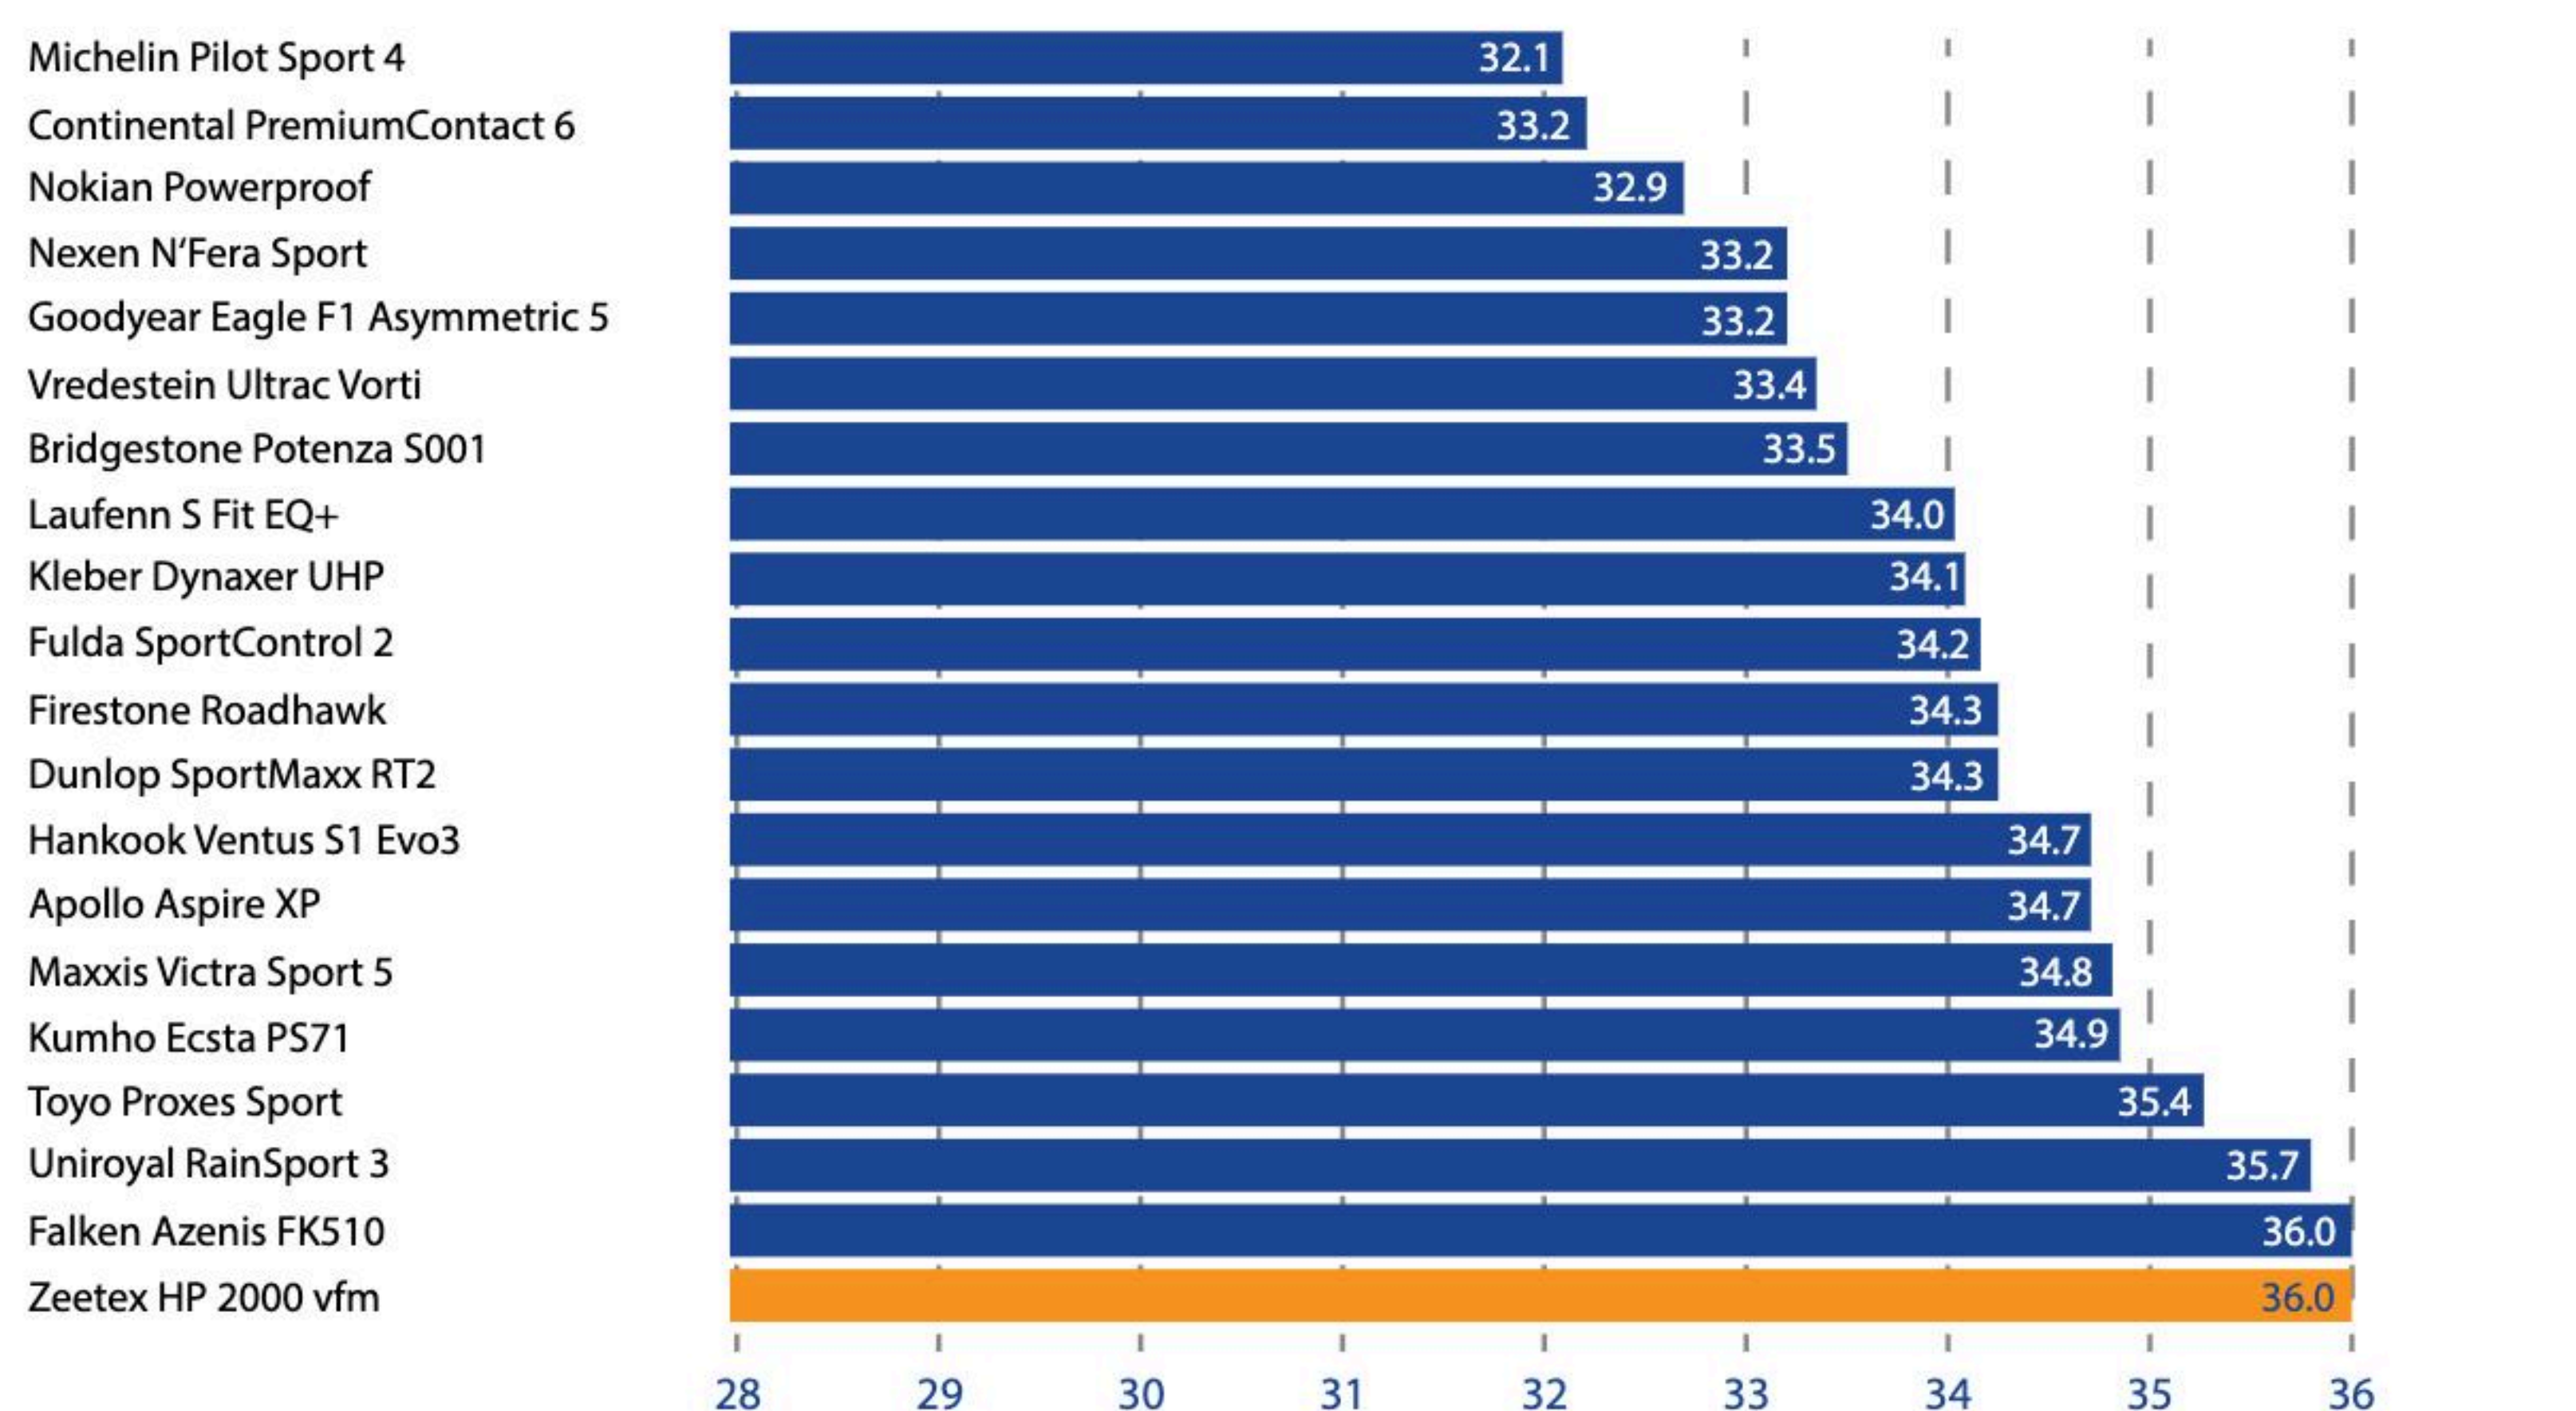


Preliminary round braking tests, Size: 245/45 R18 100Y, Vehicle: BMW 5 Series

HP2000 vfm




Performance results against Tier 2 brands tested in IDIADA, Spain


Internal Noise on Smooth Road

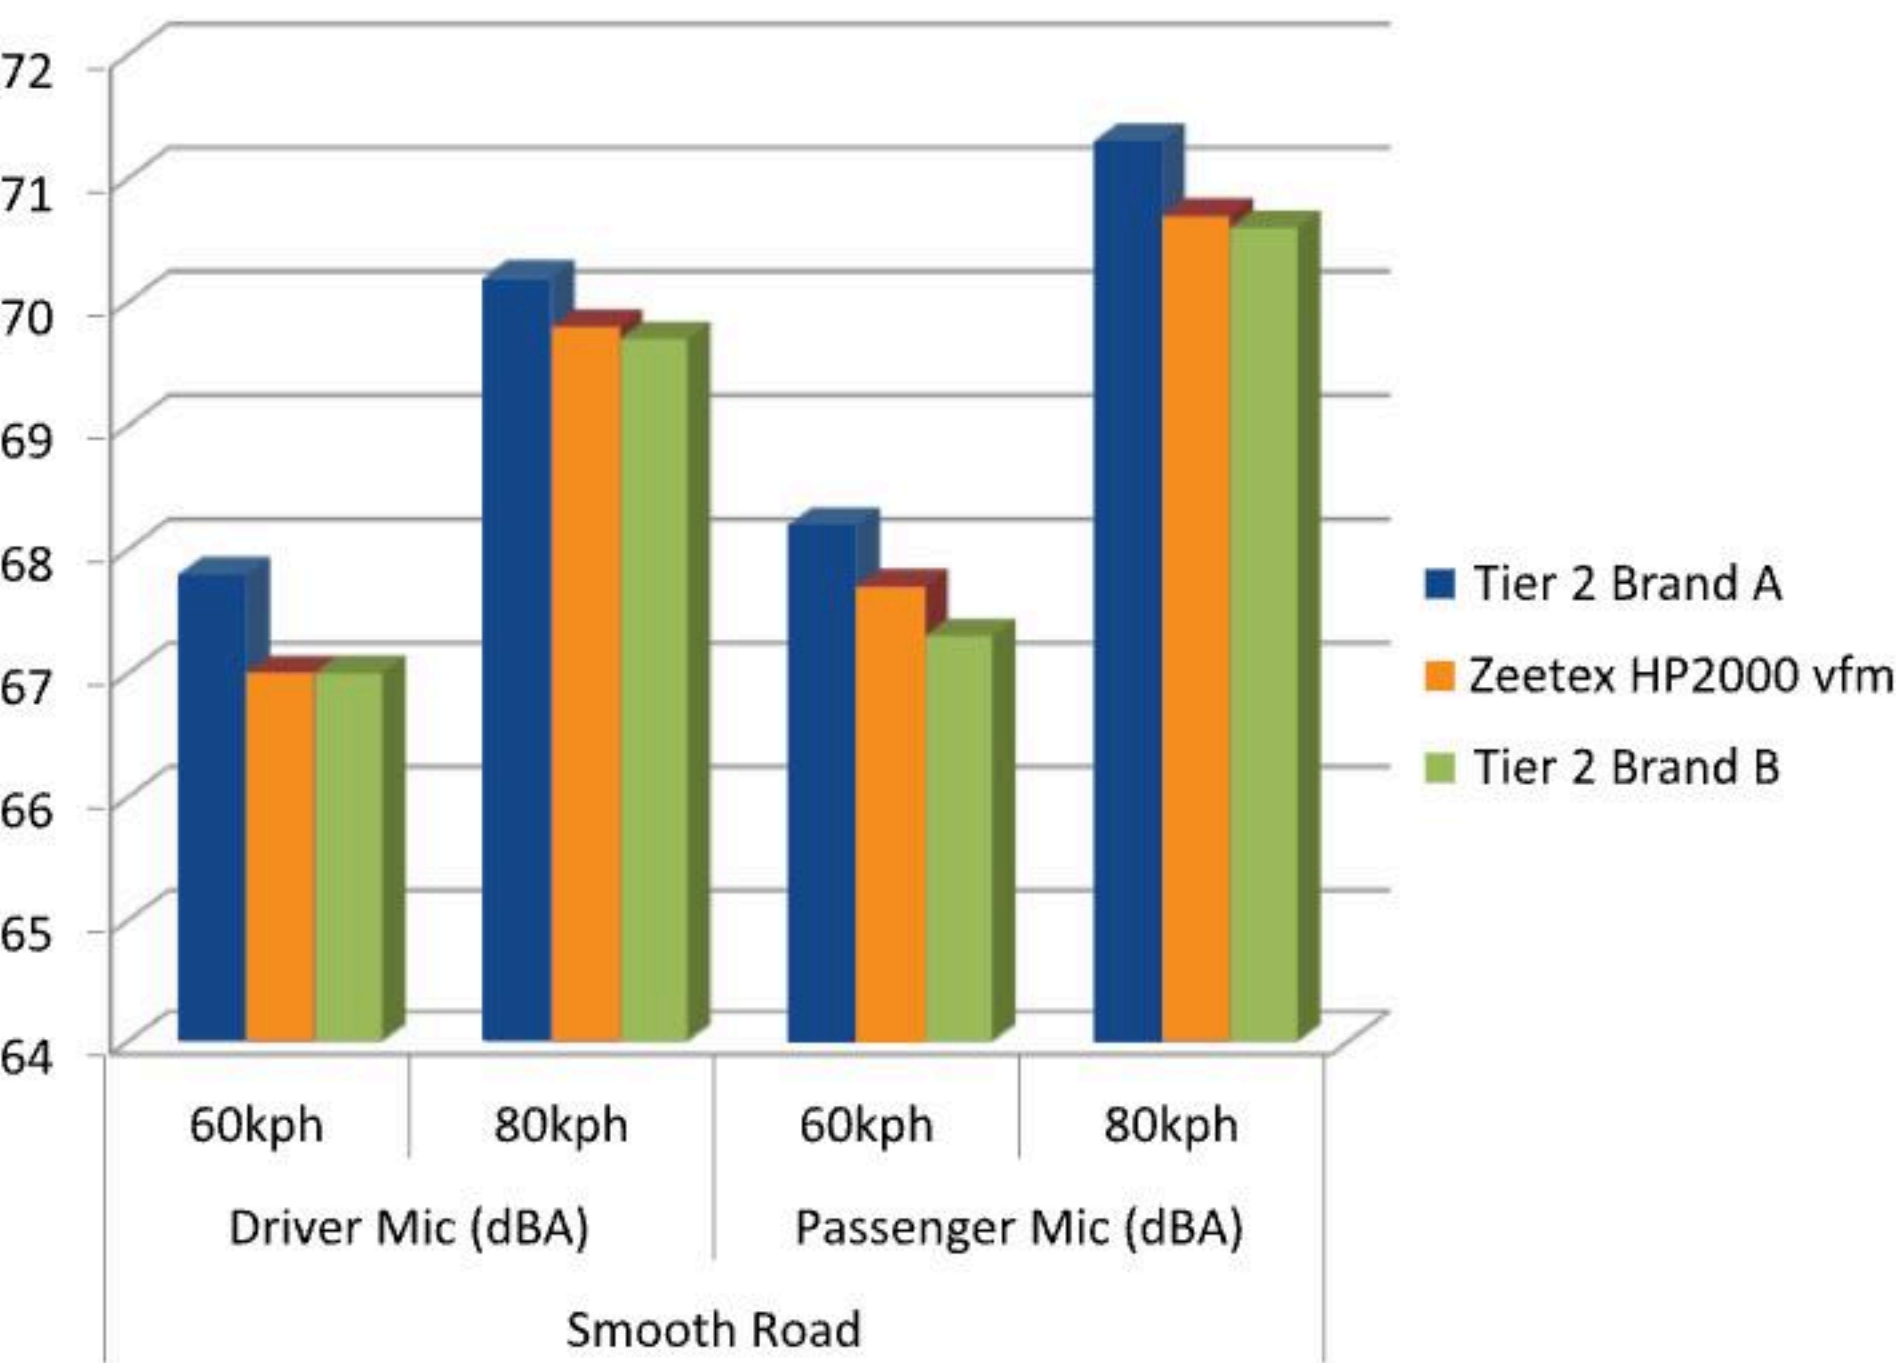


Internal Noise on Rough Road

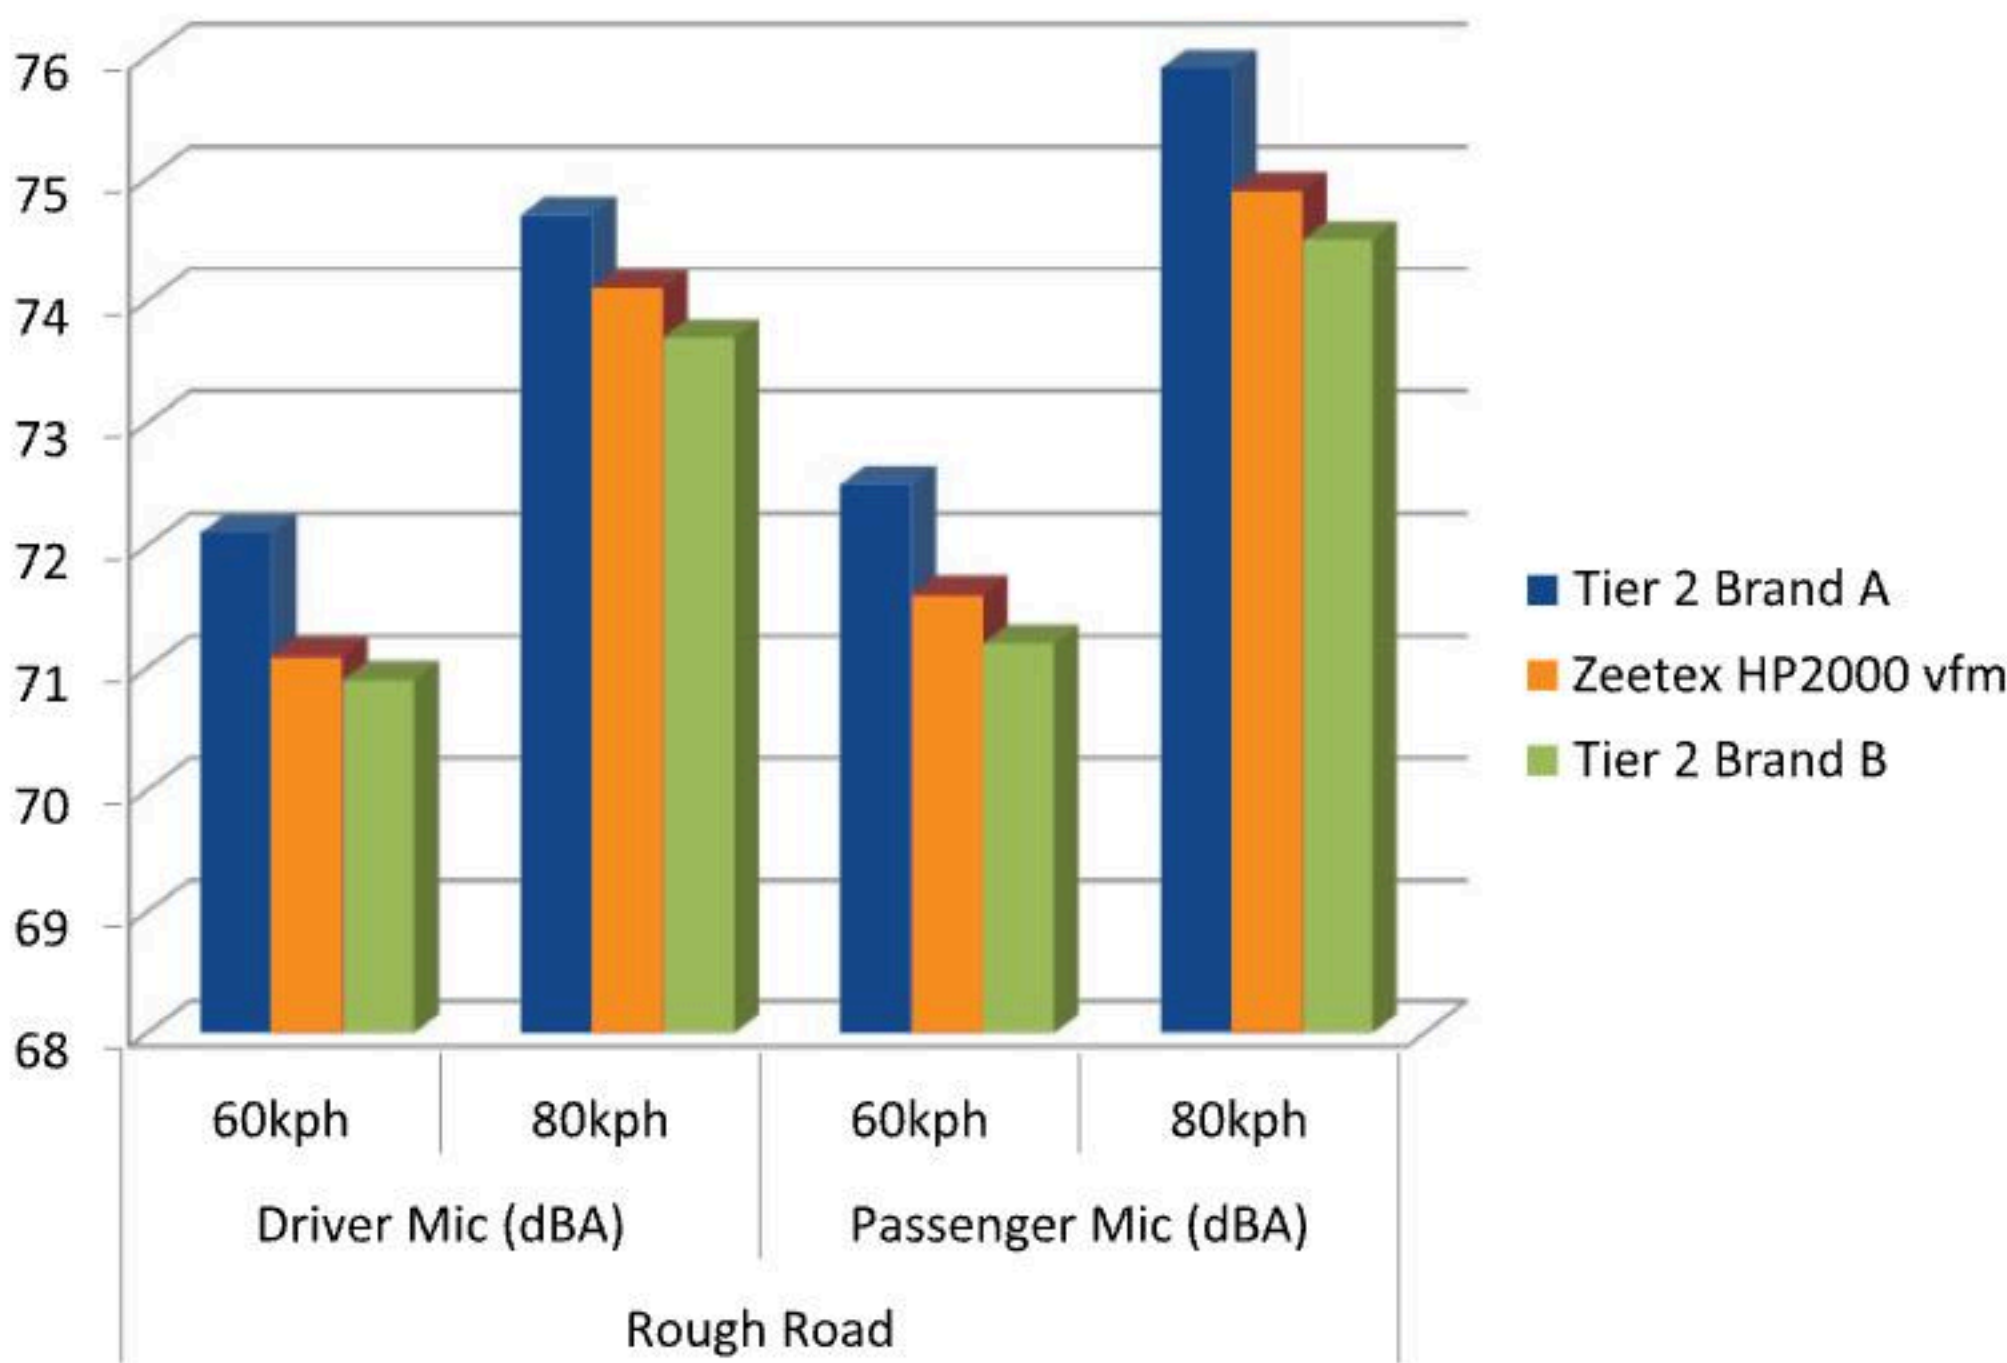

Longitudinal Aquaplaning

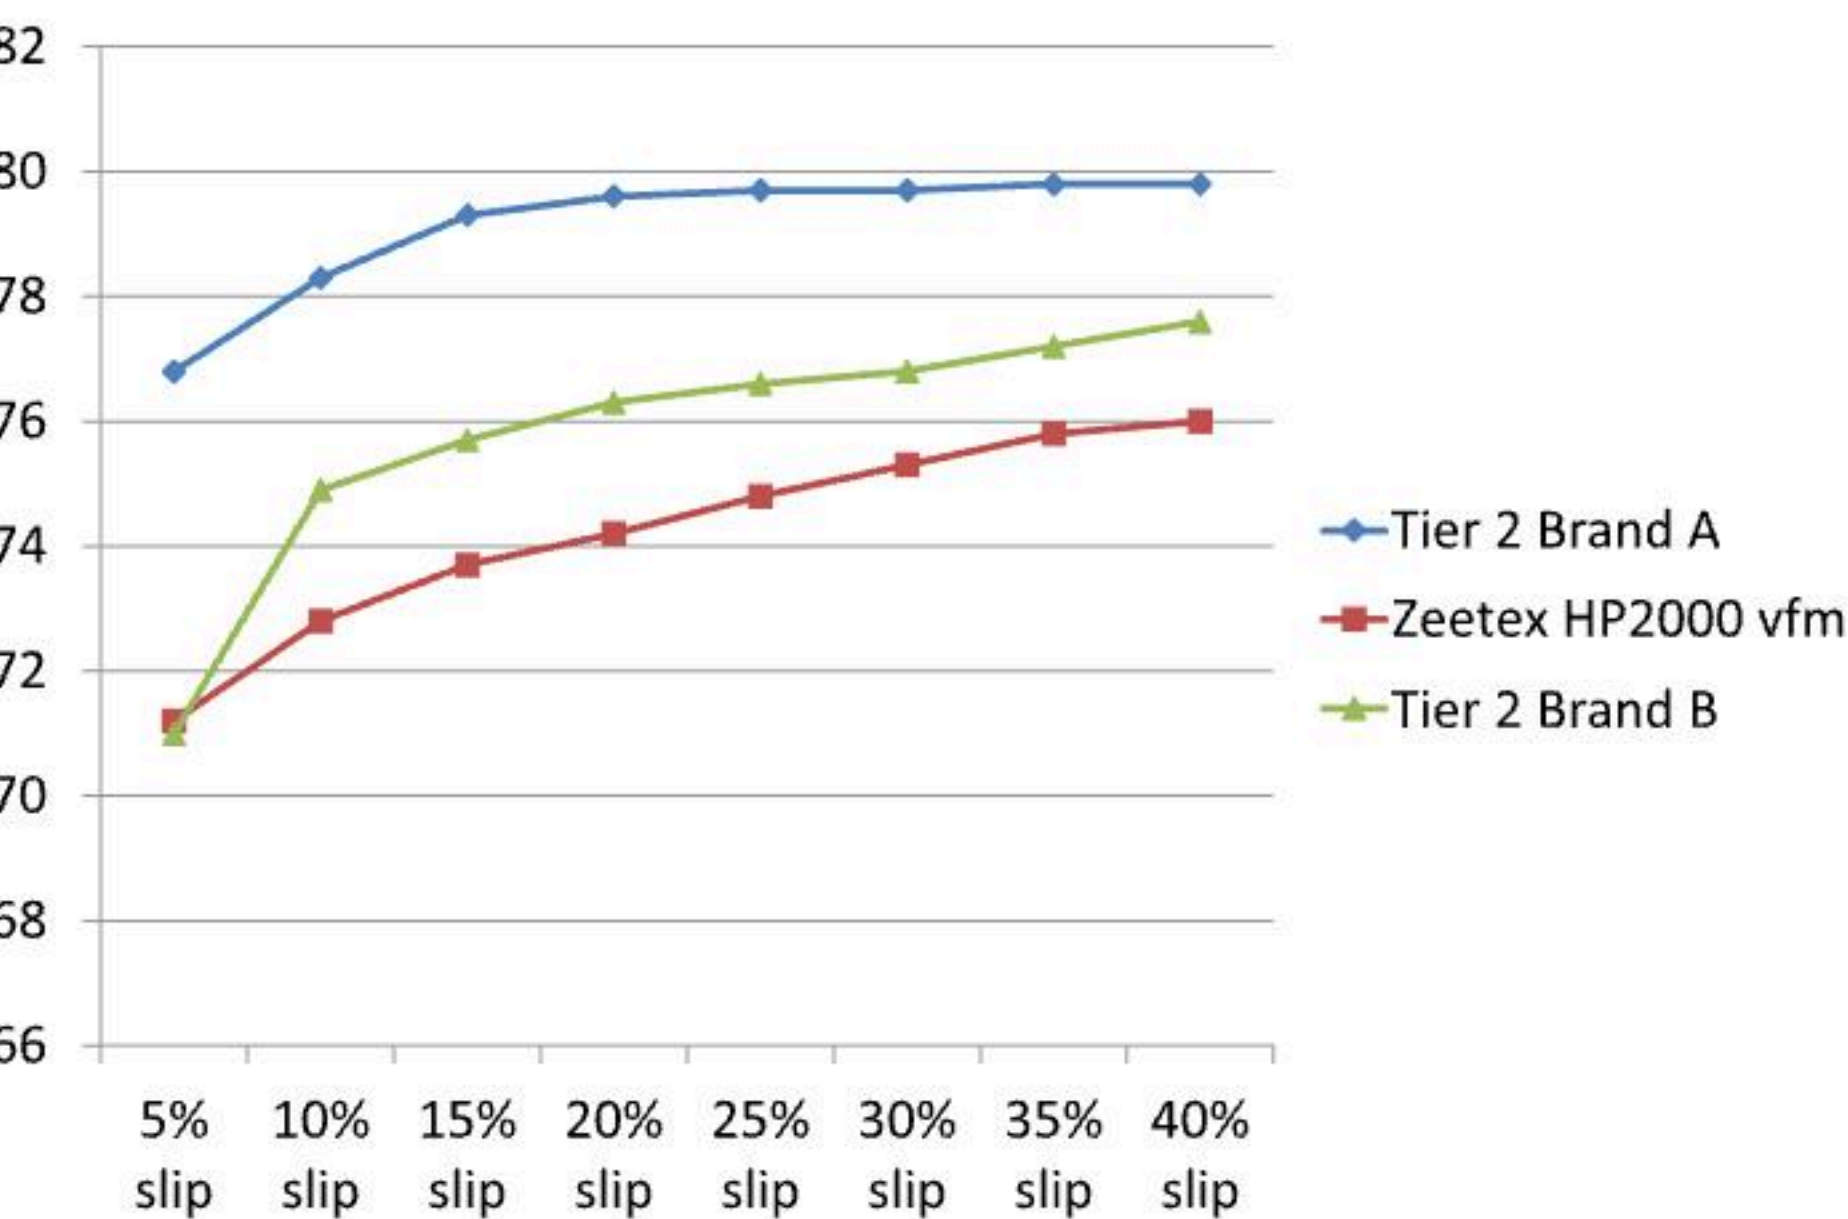

Dry Braking Distance

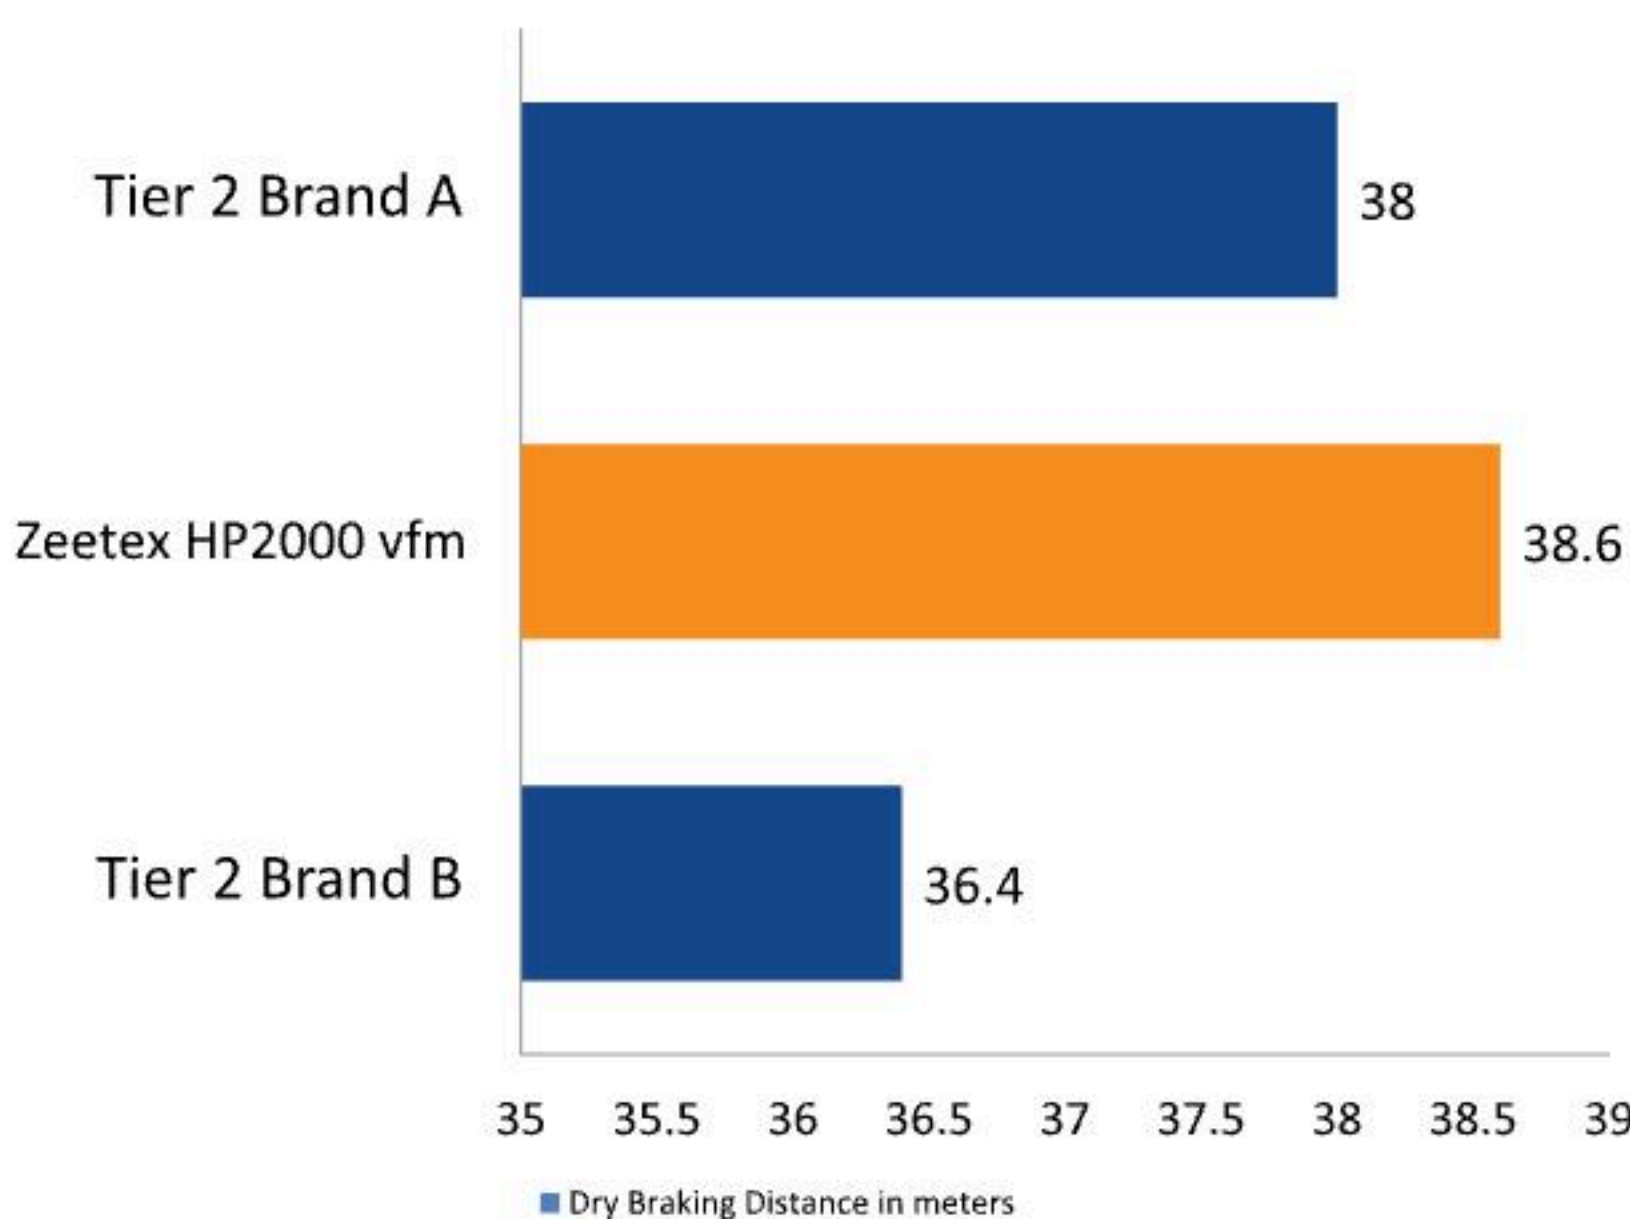



HP5000 max

THE NEXT-GEN ULTRA-HIGH PERFORMANCE TIRE

For High-performance and Luxury Vehicles


SUMMER RANGE UTQG340 A A

HP5000 max

This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique “helical” main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.



Ultra-modern tread and sidewall design suitable for modern vehicles and roads

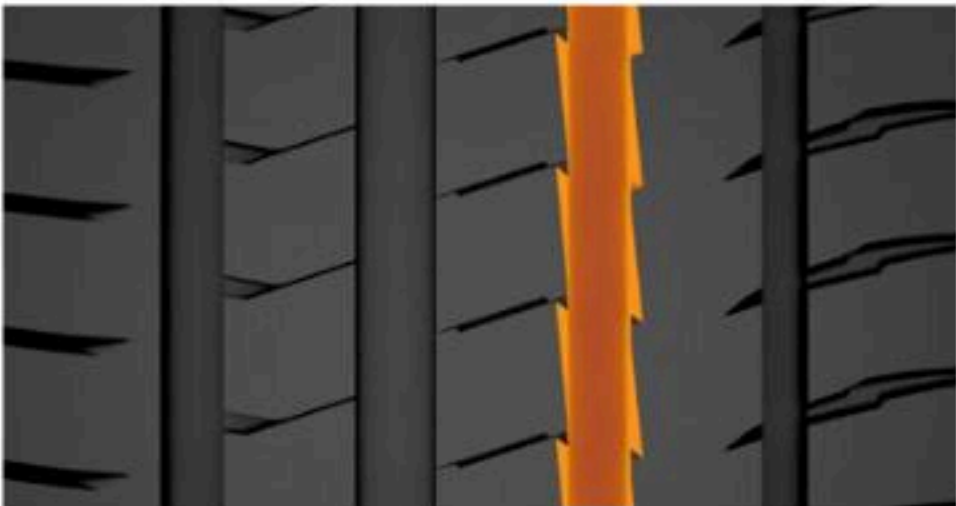

All new “helical” main groove combined with three main grooves allow rapid water ejection by adding an extra swirling effect



Soft tread appearance delivers a very quiet drive

Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
55 Series	195/55R15	89V	XL	580	50	6.0	201	595	7.8
	195/55R16	91V	XL	615	50	6.0	201	620	7.8
	205/55R16	94W	XL	670	50	6.5	214	632	7.8
	215/55R16	97W	XL	730	50	7.0	226	642	7.8
	215/55R17	98W	XL	750	50	7.0	226	668	7.8
	225/55R17	101W	XL	825	50	7.0	233	680	7.8
	235/55R17	103W	XL	875	50	7.5	245	690	7.8
50 Series	195/50R16	88V	XL	560	50	6.0	201	602	7.8
	205/50R16	91W	XL	615	50	6.5	214	612	7.8
	205/50R17	93Y	XL	650	50	6.5	214	638	7.8
	215/50R17	95W	XL	690	50	7.0	226	648	7.8
	225/50R17	98W	XL	750	50	7.0	233	658	7.8
	225/50R18	99W	XL	775	50	7.0	233	683	7.8
	235/50R18	101Y	XL	825	50	7.5	245	693	7.8
45 Series	205/45R16	87W	XL	545	50	7.0	206	590	7.8
	205/45R17	88W	XL	560	50	7.0	206	616	7.8
	215/45R17	91Y	XL	615	50	7.0	213	626	7.8
	225/45R17	94Y	XL	670	50	7.5	225	634	7.8
	235/45R17	97Y	XL	730	50	8.0	236	644	7.8
	245/45R17	99Y	XL	775	50	8.0	243	652	7.8
	225/45R18	95Y	XL	690	50	7.5	225	659	7.8
	235/45R18	98Y	XL	750	50	8.0	236	669	7.8
	245/45R18	100Y	XL	800	50	8.0	243	677	7.8
	245/45R19	102Y	XL	850	50	8.0	243	703	8.0
40 Series	245/40R17	95Y	XL	690	50	8.5	248	628	7.8
	225/40R18	92Y	XL	630	50	8.0	230	637	7.8
	235/40R18	95Y	XL	690	50	8.5	241	645	7.8
	245/40R18	97Y	XL	730	50	8.5	248	653	7.8
	225/40R19	93Y	XL	650	50	8.0	230	663	8.0
	245/40R19	98Y	XL	750	50	8.5	248	679	8.0
	255/40R19	100Y	XL	800	50	9.0	260	687	8.0
	275/40R19	105Y	XL	925	50	9.5	278	703	8.0
	245/40R20	99Y	XL	775	50	8.5	248	704	8.0
	255/40R20	101Y	XL	825	50	9.0	260	712	8.0

For High-performance and Luxury Vehicles

SUMMER RANGE UTQG340 A A

HP5000 max

This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique “helical” main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.



Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
35 Series	255/35R18	94Y	XL	670	50	9.0	260	635	7.8
	265/35R18	97Y	XL	730	50	9.5	271	643	8.0
	275/35R18	99Y	XL	775	50	9.5	278	649	8.0
	235/35R19	91Y	XL	615	50	8.5	241	647	8.0
	245/35R19	93Y	XL	650	50	8.5	248	655	8.0
	255/35R19	96Y	XL	710	50	9.0	260	661	8.0
	265/35R19	98Y	XL	750	50	9.5	271	669	8.0
	275/35R19	100Y	XL	800	50	9.5	278	675	8.0
	235/35R20	92Y	XL	630	50	8.5	241	672	8.0
	245/35R20	95Y	XL	690	50	8.5	248	680	8.0
	255/35R20	97Y	XL	730	50	9.0	260	686	8.0
	265/35R20	99Y	XL	775	50	9.5	271	694	8.0
	275/35R20	102Y	XL	850	50	9.5	278	700	8.0
	295/35R20	105Y	XL	925	50	10.5	301	714	8.3
	245/35R21	96Y	XL	710	50	8.5	248	705	8.0
30 Series	265/30R19	93Y	XL	650	50	9.5	271	643	8.0
	275/30R20	97Y	XL	730	50	9.5	278	674	8.0

Upcoming sizes

Series	Size	Load Index / Speed Symbol	
55	205/55R17	95V	XL
50	195/50R15	82V	
45	225/45R19	96Y	XL
40	235/40R19	96Y	XL

For High-performance and Luxury Vehicles

SUMMER RANGE **UTQG340 A A**

HP5000 max



This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique “helical” main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.





Performance results against Tier 2 brands tested in IDIADA, Spain

Tire size tested: 225/55R17 101W



Internal Noise on Smooth Road @ 60Km/h

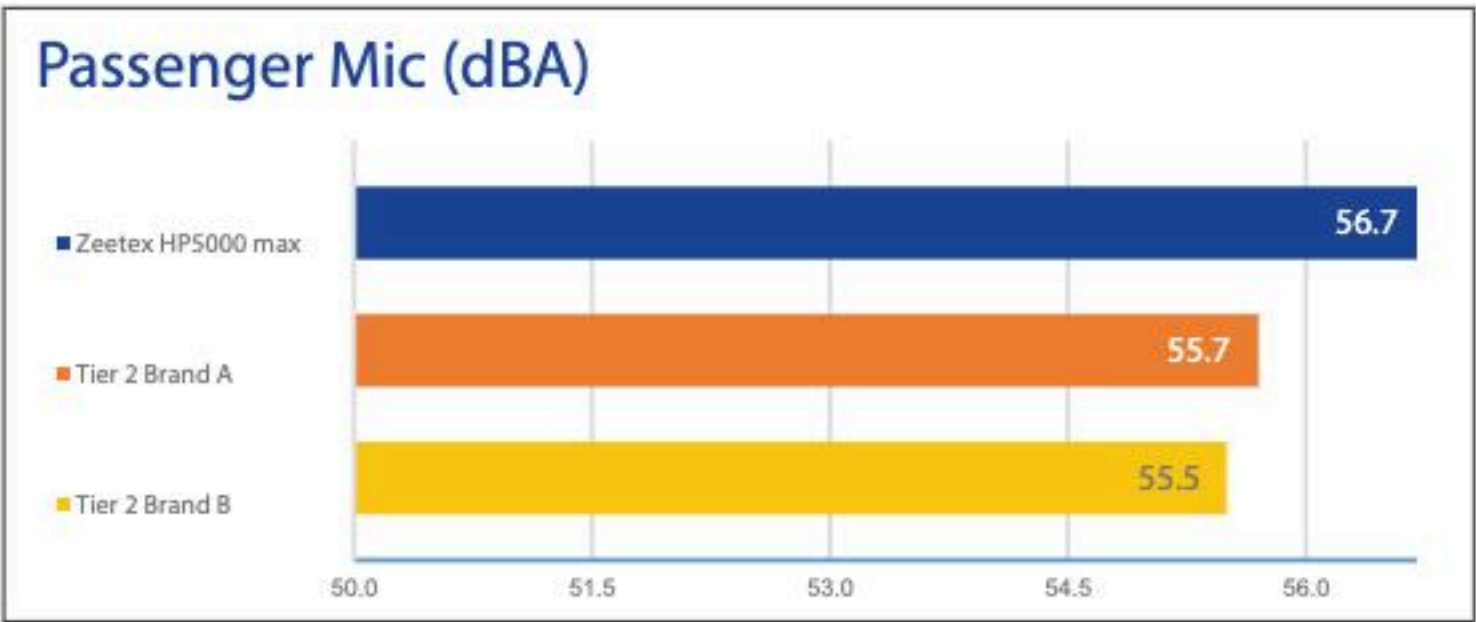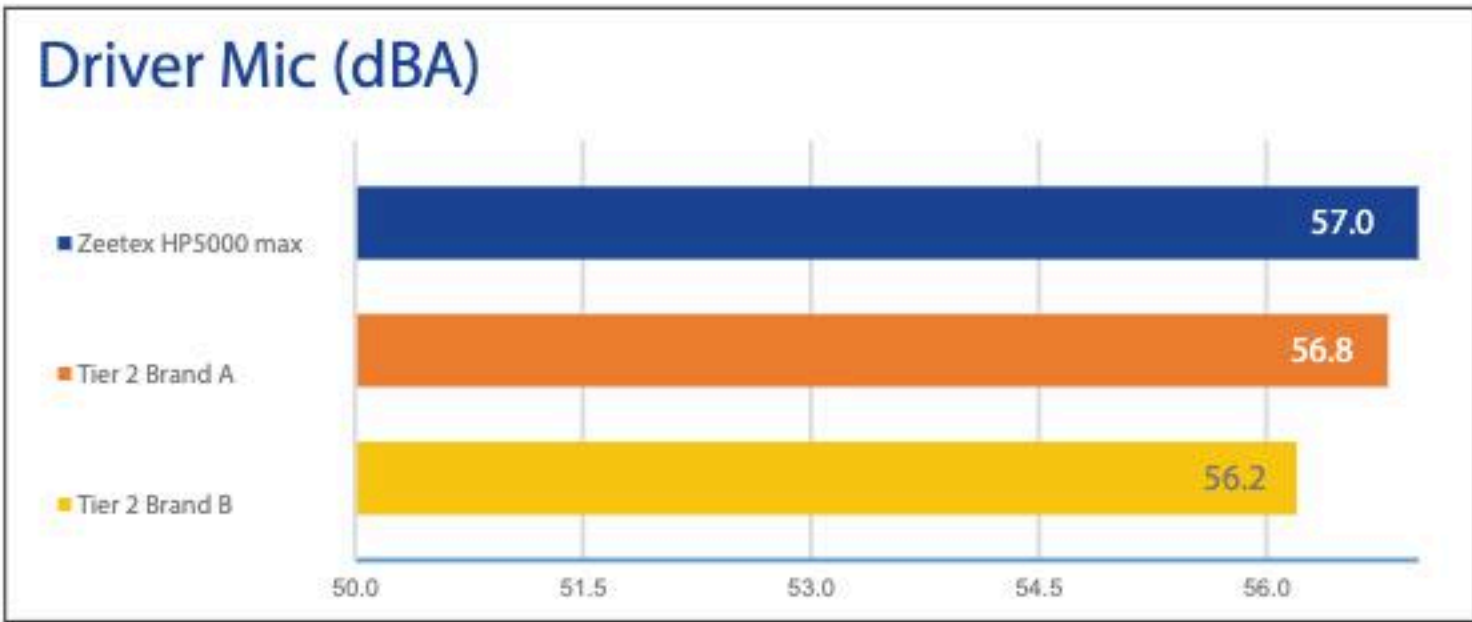



Internal Noise on Smooth Road @ 80Km/h

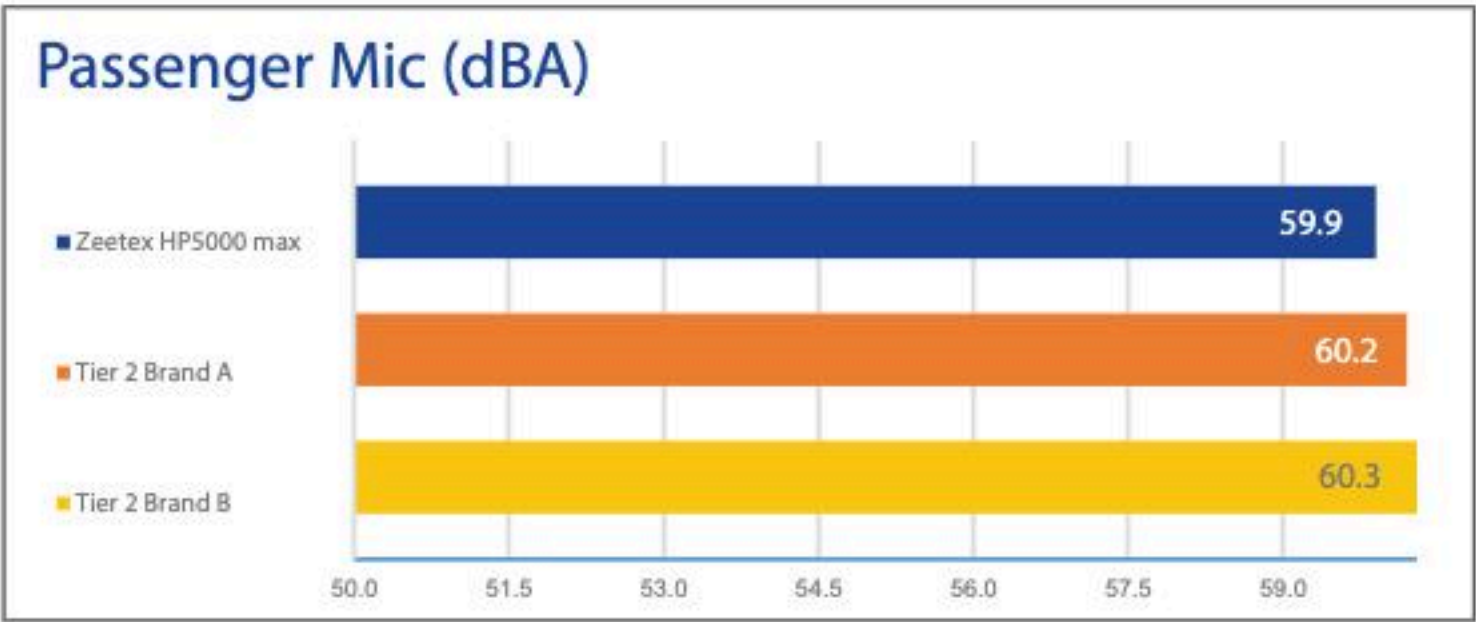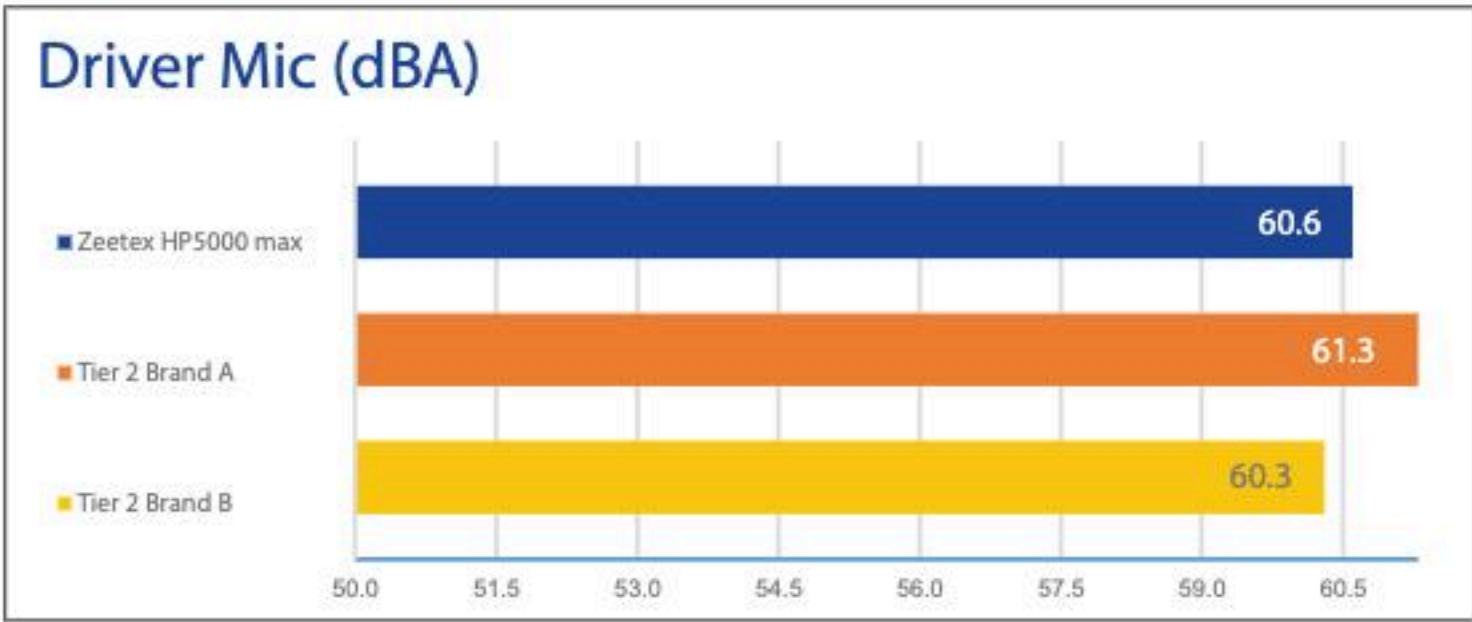


Internal Noise on Rough Road @ 60Km/h

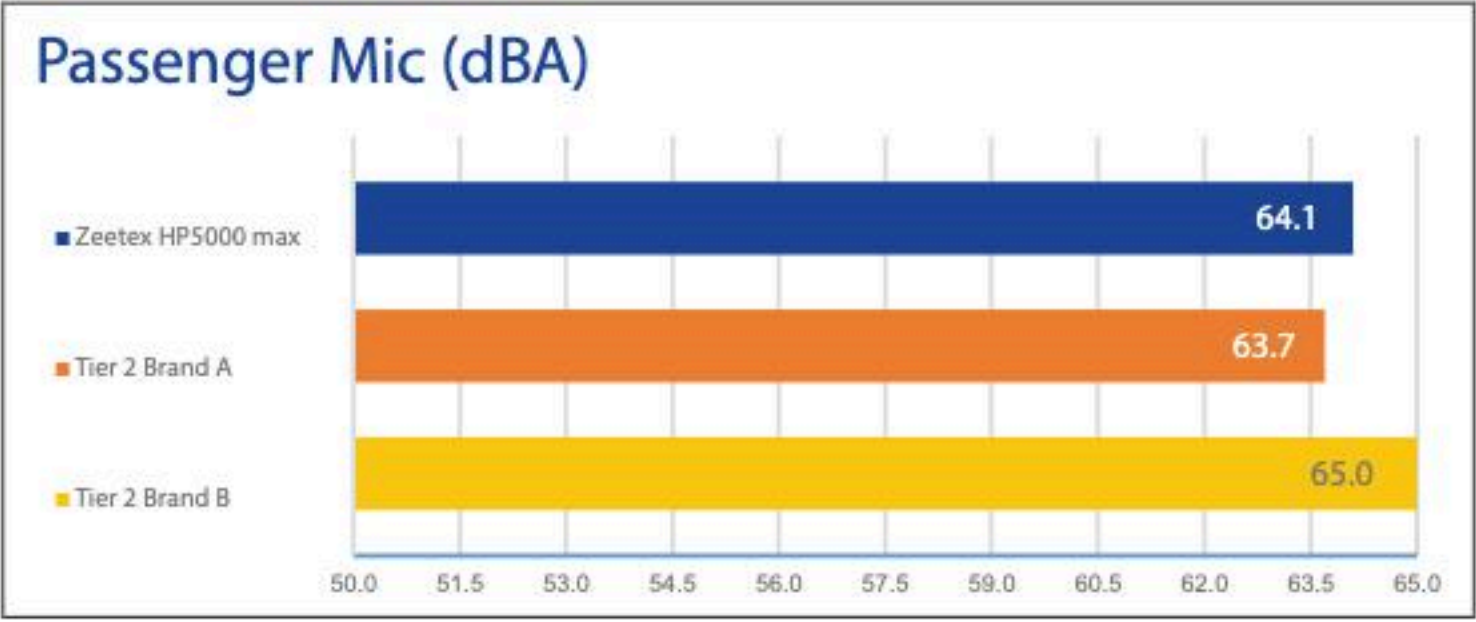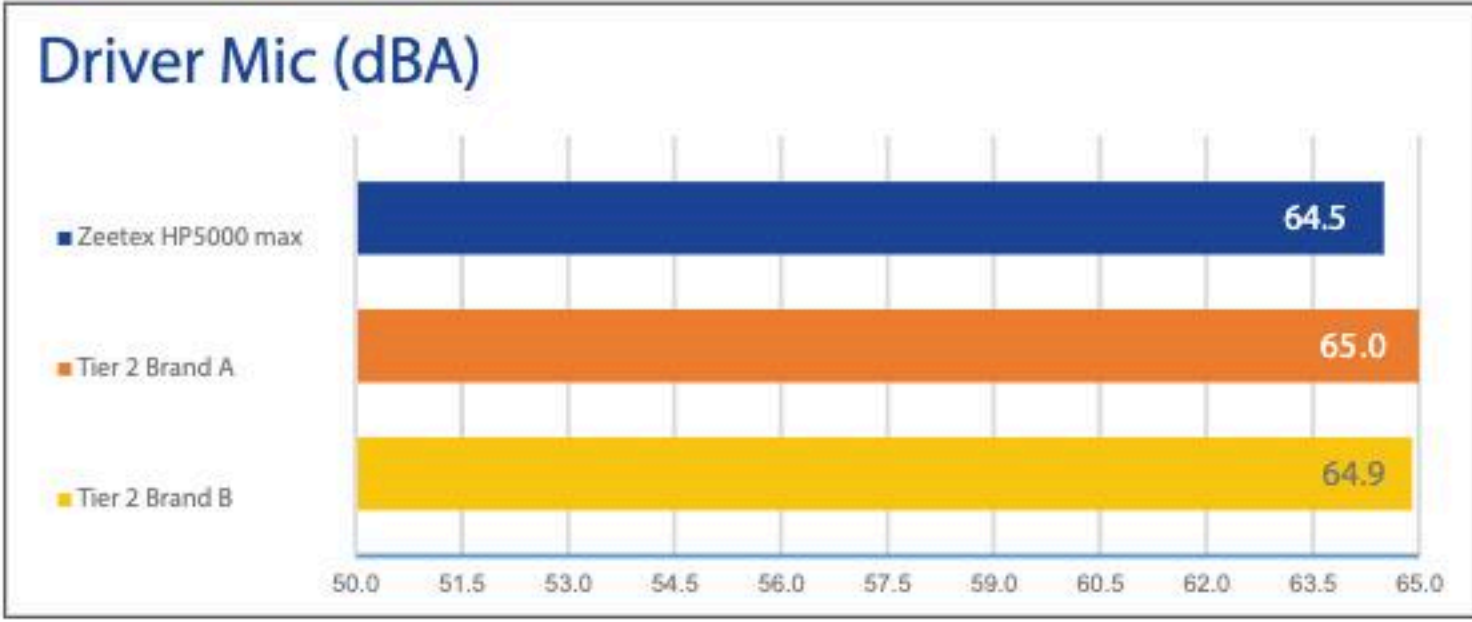


Internal Noise on Rough Road @ 80Km/h

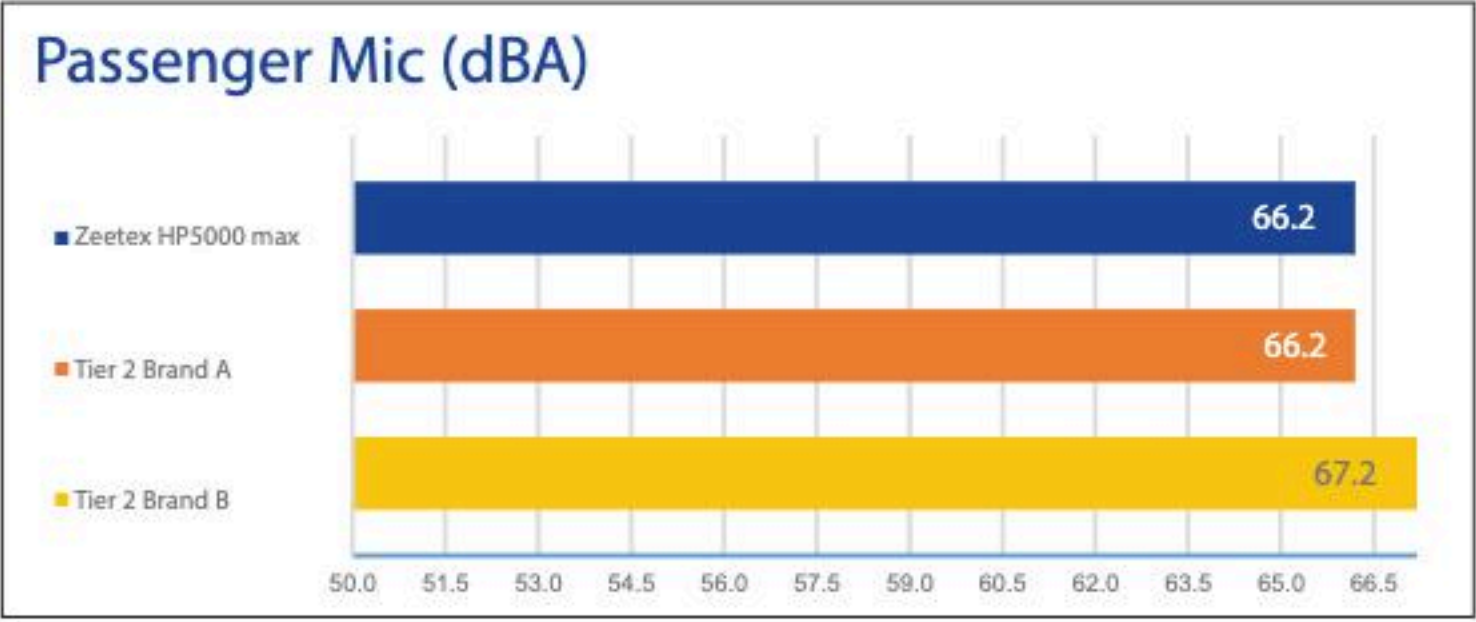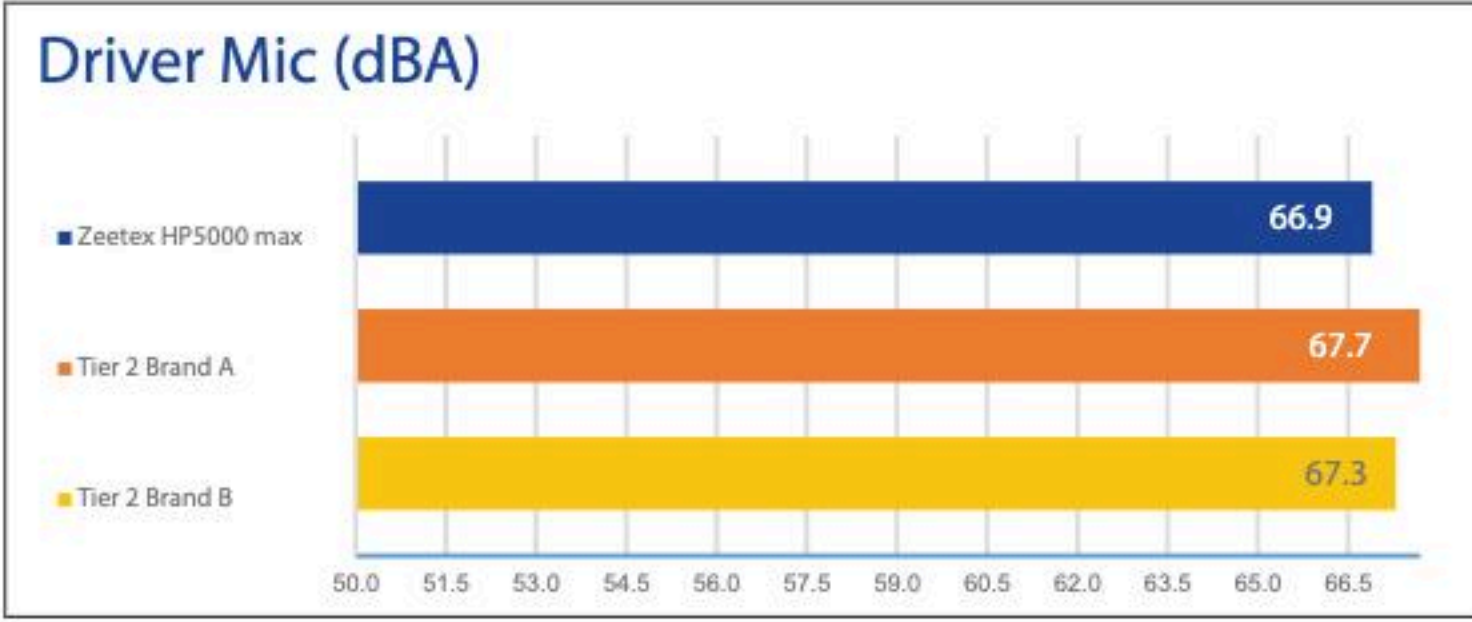


Dry Braking Distance in Meters

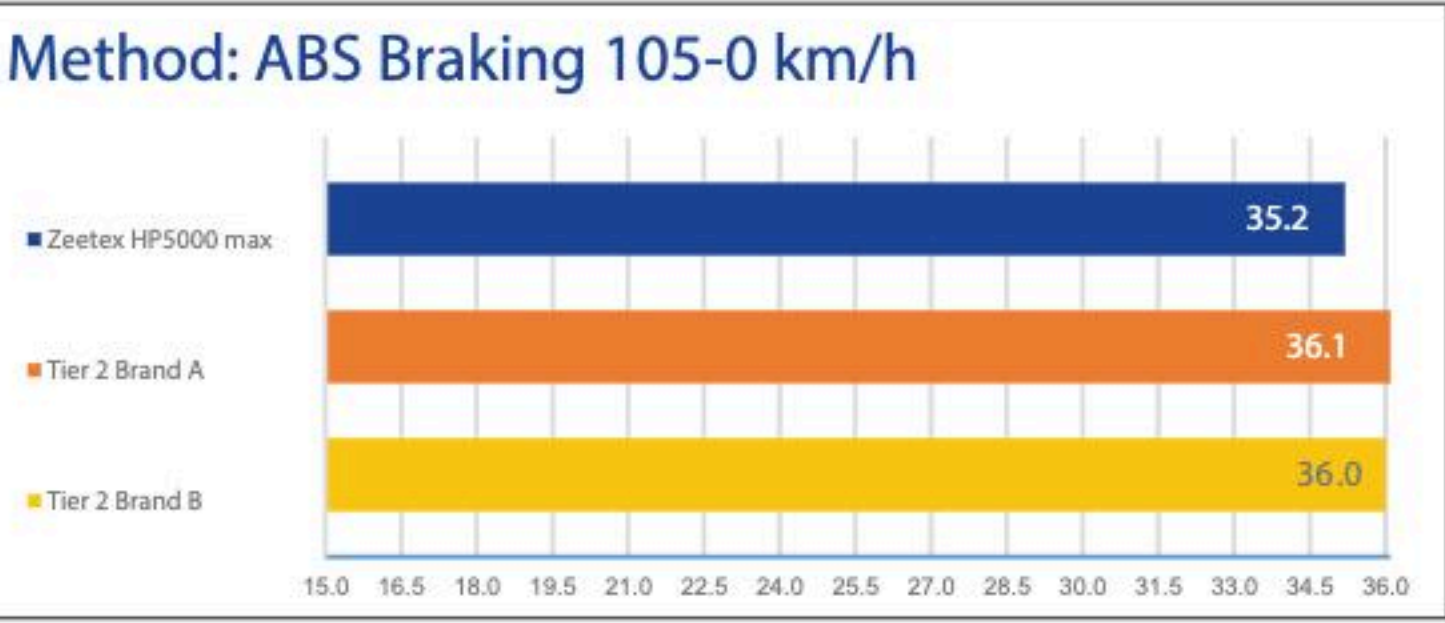

Dry Handling

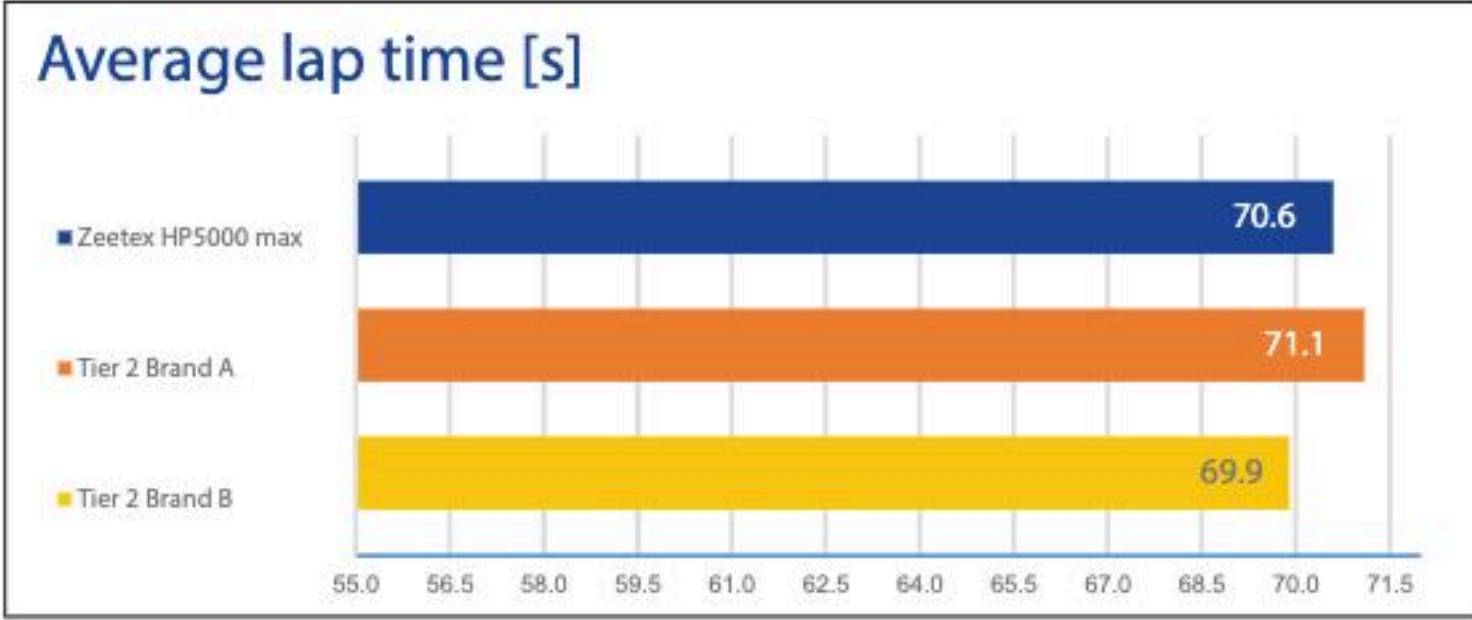

Wet Handling

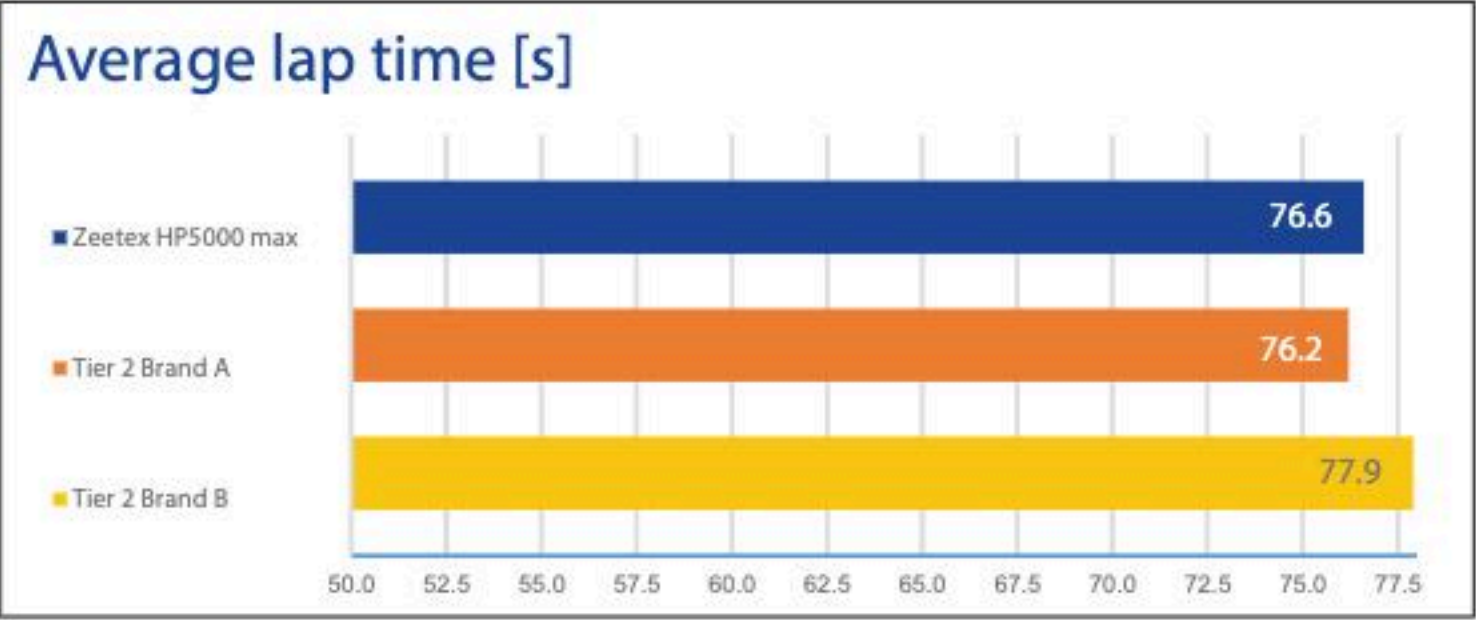


For High-performance and Luxury Vehicles

SUMMER RANGE UTQG420 A A

HP6000 eco



Serrations on the groove wall reduce pipe resonance, delivering an exceptionally silent ride

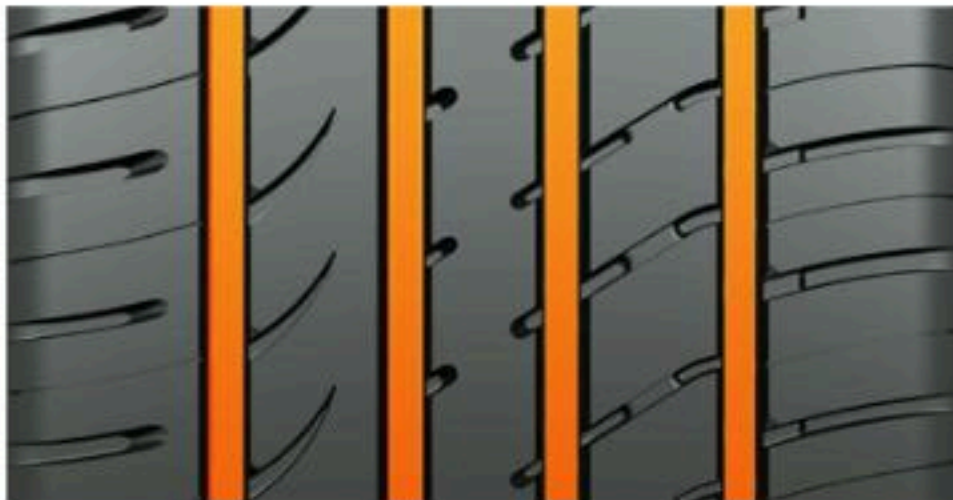

Absorption of road inputs delivers extra-ordinary driving comfort



Improved vehicle stability & reduced braking distance in wet & dry conditions

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
60 Series	215/60R17	96H	710	44	6.5	221	690	8.0
	225/60R17	99H	775	44	6.5	228	702	8.0
	235/60R18	103H	875	44	7.0	240	739	8.0
55 Series	205/55ZR16	91W	615	44	6.5	214	632	7.6
	215/55R16	97V XL	730	49	7.0	226	642	7.8
	225/55ZR16	95W	690	44	7.0	266	654	8.0
	205/55ZR17	95W XL	690	49	6.5	214	658	7.6
	215/55ZR17	98W XL	750	51	7.0	226	668	7.8
	225/55ZR17	101W XL	825	51	7.0	233	680	7.8
	235/55ZR17	103W XL	875	51	7.5	245	690	7.8
	215/55ZR18	99W XL	775	49	7.0	226	693	7.8
	225/55R18	98V	750	44	7.0	233	705	8.0
	235/55ZR18	104W XL	900	49	7.5	245	715	8.0
	235/55ZR19	101W	825	44	7.5	245	741	7.6
50 Series	195/50ZR16	88V XL	560	42	6.0	201	602	7.6
	205/50ZR16	91W XL	615	42	6.5	223	620	7.6
	205/50ZR17	93W XL	650	49	6.5	214	638	7.8
	215/50ZR17	95W XL	690	49	7.0	226	648	8.0
	225/50ZR17	98W XL	750	51	7.0	233	658	7.8
	235/50ZR18	101W XL	825	51	7.5	245	693	8.0
	255/50ZR19	107W XL	975	49	8.0	265	739	8.0
45 Series	205/45ZR16	87W XL	545	49	7.0	206	590	8.0
	205/45ZR17	88W XL	560	49	7.0	206	616	7.8
	215/45ZR17	91W XL	615	51	7.0	213	626	7.8
	225/45ZR17	94Y XL	670	49	7.5	225	634	7.8
	235/45ZR17	97W XL	730	51	8.0	236	644	7.8
	245/45ZR17	99W XL	775	51	8.0	243	652	8.0
	215/45ZR18	93W XL	650	49	7.0	213	651	7.6
	225/45ZR18	95Y XL	690	49	7.5	225	659	7.8
	235/45ZR18	98W XL	750	49	8.0	236	669	7.5
	245/45ZR18	100Y XL	800	51	8.0	243	677	7.8
	245/45ZR19	102W XL	850	50	8.0	243	703	7.6
	245/45ZR20	103W XL	875	50	8.0	243	728	7.6
	275/45ZR21	110W XL	1060	49	9.0	273	781	7.6
40 Series	205/40ZR17	84W XL	500	51	7.5	212	596	7.6
	225/40ZR18	92Y XL	630	51	8.0	230	637	7.8

For High-performance and Luxury Vehicles

SUMMER RANGE UTQG420 A A

HP6000 eco



Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
40 Series	235/40ZR18	95Y	XL	690	51	8.5	241	645	7.8
	245/40ZR18	97Y	XL	730	51	8.5	248	653	7.8
	255/40ZR18	99W	XL	775	49	9.0	260	661	7.6
	225/40ZR19	93W	XL	650	49	8.0	230	663	7.6
	235/40ZR19	96W	XL	710	49	8.5	241	671	7.6
	245/40ZR19	98W	XL	750	49	8.5	248	679	7.6
	255/40ZR19	100Y	XL	800	49	9.0	260	687	7.5
	275/40ZR19	105W	XL	925	49	9.5	278	703	7.6
35 Series	265/35ZR18	97W	XL	730	50	9.5	271	643	7.6
	235/35ZR19	91W	XL	615	49	8.5	241	647	8.0
	245/35ZR19	93W	XL	650	50	8.5	248	655	7.6
	275/35ZR19	100W	XL	800	49	9.5	278	675	7.6
30 Series	275/30ZR20	97W	XL	730	49	9.5	278	674	7.6

For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 400 A A

SU1000

The ZEETEX SU1000 is engineered with comfort in mind, working quietly and confidently on all road surfaces.



Serrations on the groove wall reduce pipe resonance, delivering an exceptionally silent ride



Absorption of road inputs delivers extra-ordinary driving comfort



Improved vehicle stability & reduced braking distance in wet & dry conditions

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	265/70R18	116H	1250	51	8.0	248	829	8.8
65 Series	235/65R17	104H	900	51	7.0	240	738	8.2
	245/65R17	107T	975	51	7.0	248	750	8.0
60 Series	245/60R18	105H	925	51	7.0	248	751	8.4
	285/60R18	120H XL	1400	51	8.5	292	799	9.0
	275/60R20	115H	1215	51	8.0	279	838	8.8
55 Series	235/55R18	104V XL	900	51	7.5	245	715	8.0
	255/55R18	109V XL	1030	51	8.0	265	737	8.4
	235/55R19	101H	825	51	7.5	245	741	8.0
	255/55R19	111V XL	1090	51	8.0	265	763	9.0
	275/55R19	111V	1090	51	8.5	284	785	8.8
	235/55R20	102H	850	51	7.5	245	766	8.0
	275/55R20	117V XL	1285	51	8.5	284	810	8.8
50 Series	245/50R20	102V	850	51	7.5	253	754	8.0
	255/50ZR19	107W XL	975	51	8.0	265	739	8.4
	265/50R20	112V XL	1120	51	8.5	277	774	8.4
	285/50R20	116V XL	1250	51	9.0	297	794	8.4
45 Series	245/45ZR20	103Y XL	875	51	8.0	243	728	8.0
	255/45R20	105V XL	925	51	8.5	255	738	8.2
	275/45R20	110V XL	1060	51	9.0	273	756	8.6
	285/45R22	114V XL	1180	51	9.5	285	815	8.8
40 Series	275/40ZR20	106Y XL	950	51	9.5	278	728	8.4
	305/40ZR22	114W XL	1180	51	11.0	313	803	9.0
35 Series	295/35R21	107V XL	975	51	10.5	301	739	9.0
	265/35ZR22	102W XL	850	51	9.5	271	745	8.2
	295/35R24	110V XL	1060	51	10.5	301	816	8.2
	305/35R24	114V XL	1180	51	11.0	313	824	9.0
30 Series	255/30ZR22	95W XL	690	51	9.0	260	713	8.0


For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG360 A A

SU1000 vfm



Serrations on the groove wall
reduce pipe resonance noise
making it an extremely silent
tire

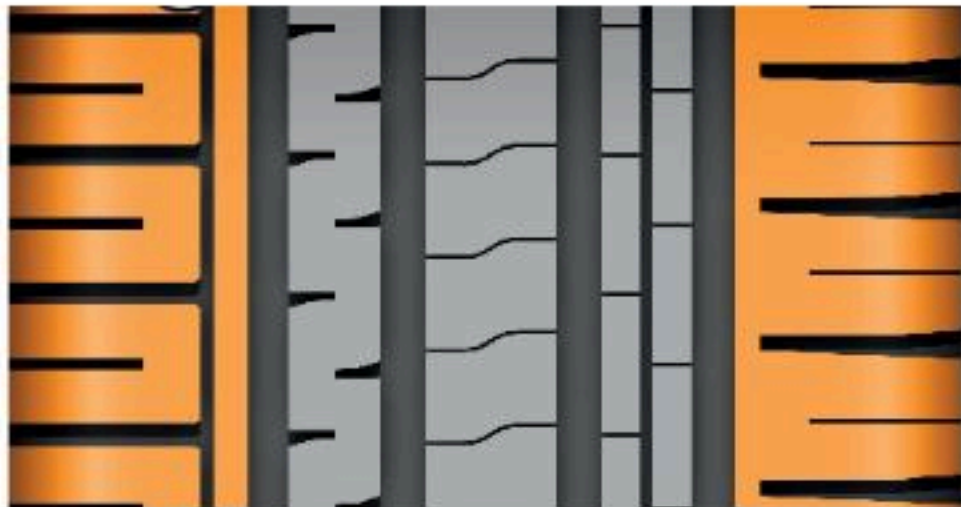

Improved vehicle stability &
reduced braking distance both
in dry & wet surfaces



Good absorption of road
inputs delivering extra-ordinary
driving comfort

Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
65 Series	215/65R16	102V	XL	850	50	6.5	221	686	7.9
	235/65R17	108V	XL	1000	50	7.0	240	738	7.9
60 Series	235/60R16	100V		800	44	7.0	240	688	7.9
	235/60R18	107W	XL	975	50	7.0	240	739	7.9
	245/60R18	105V		925	44	7.0	248	751	7.9
55 Series	235/55R17	103V	XL	875	50	7.5	245	690	7.9
	215/55R18	99V	XL	775	50	7.0	226	693	7.9
	225/55R18	98V		750	44	7.0	233	705	7.9
	235/55R18	104V	XL	900	50	7.5	245	715	7.9
	255/55R18	109W	XL	1030	50	8.0	265	737	7.9
	255/55R19	111W	XL	1090	50	8.0	265	763	7.9
50 Series	235/50R18	101W	XL	825	50	7.5	245	693	7.9
	255/50R19	107W	XL	975	50	8.0	265	739	7.9
	265/50R20	112V	XL	1120	50	8.5	277	774	7.9
45 Series	255/45R20	105V	XL	925	50	8.5	255	738	7.9
	275/45R20	110V	XL	1060	50	9.0	273	756	7.9



SU5000 max

THE NEXT-GEN SUV TIRE

For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 440 A A

SU5000 max

The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Positioning of extra wide ribs with four main grooves enhance road contact area for better performance and fuel efficiency



Impressively engineered with a modern sipe style and positioning for a quiet and comfortable drive



Sporty aesthetic and performance delivers a striking aesthetic seen on modern SUVs & Crossovers

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
65 Series	225/65R17	102H	850	44	6.5	228	724	8.0
	235/65R17	108V XL	1000	50	7.0	240	738	8.0
	275/65R18	116H	1250	44	8.0	279	815	8.0
60 Series	235/60R17	102V	850	44	7.0	240	714	8.0
	235/60R18	103V	875	44	7.0	240	739	8.0
	245/60R18	105V	925	44	7.0	248	751	8.0
	255/60R18	112W XL	1120	50	7.5	260	763	8.0
	265/60R18	110V	1060	44	8.0	272	775	8.0
	285/60R18	116V	1250	44	8.5	292	799	9.0
	275/60R20	115V	1215	44	8.0	279	838	9.0
55 Series	215/55R18	99V XL	775	50	7.0	226	693	7.8
	235/55R18	104Y XL	900	50	7.5	245	715	8.0
	255/55R18	109Y XL	1030	50	8.0	265	737	8.0
	235/55R19	105Y XL	925	50	7.5	245	741	8.0
	255/55R19	111W XL	1090	50	8.0	265	763	8.0
	275/55R19	111W	1090	44	8.5	284	785	8.3
	235/55R20	102W	850	44	7.5	245	766	8.0
	255/55R20	110Y XL	1060	50	8.0	265	788	8.0
	275/55R20	117V XL	1285	50	8.5	284	810	9.0
50 Series	235/50R19	103W XL	875	50	7.5	245	719	8.0
	255/50R19	107W XL	975	50	8.0	265	739	8.0
	265/50R19	110Y XL	1060	50	8.5	277	749	8.0
	245/50R20	105W XL	925	50	7.5	253	754	8.0
	255/50R20	109Y XL	1030	50	8.0	265	764	8.0
	265/50R20	111V XL	1090	50	8.5	277	774	8.0
	275/50R20	113W XL	1150	50	8.5	284	784	8.3
	285/50R20	116V XL	1250	50	9.0	297	794	9.0
	275/50R21	113Y XL	1150	50	8.5	284	809	8.3
	275/50R22	115V XL	1215	50	8.5	284	835	8.3

For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 440 A A

SU5000 max

The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
45 Series	245/45R20	103Y	XL	875	50	8.0	243	728	8.0
	255/45R20	105W	XL	925	50	8.5	255	738	8.0
	265/45R20	108Y	XL	1000	50	9.0	266	746	8.0
	275/45R20	110Y	XL	1060	50	9.0	273	756	8.3
	275/45R21	110Y	XL	1060	50	9.0	273	781	8.3
	285/45R22	114W	XL	1180	50	9.5	285	815	9.0
40 Series	275/40R20	106Y	XL	950	50	9.5	278	728	8.0
	265/40R21	105Y	XL	925	50	9.5	271	745	8.0
	295/40R21	111Y	XL	1090	50	10.5	301	769	8.3
	265/40R22	106Y	XL	950	50	9.5	271	771	8.0
	275/40R22	108Y	XL	1000	50	9.5	278	779	8.3
	285/40R22	110Y	XL	1060	50	10.0	290	787	8.3
	305/40R22	114W	XL	1180	50	11.0	313	803	9.0
	315/35R20	110Y	XL	1060	50	11.0	320	728	9.0
35 Series	295/35R21	107Y	XL	975	50	10.5	301	739	8.3
	265/35R22	102Y	XL	850	50	9.5	271	745	8.0
	285/35R22	106Y	XL	950	50	10.0	290	759	8.3

Upcoming sizes

Series	Size	Load Index / Speed Symbol	
60	205/60R17	97W	XL
55	225/55R18	102Y	XL
	225/55R19	103Y	XL
	245/55R19	107V	XL

For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 440 A A

SU5000 max

The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Performance results against Tier 2 brands tested in IDIADA, Spain

Tire size tested: 245/45R20 103Y


Internal Noise on Smooth Road @ 60Km/h



Internal Noise on Smooth Road @ 80Km/h




Internal Noise on Rough Road @ 60Km/h

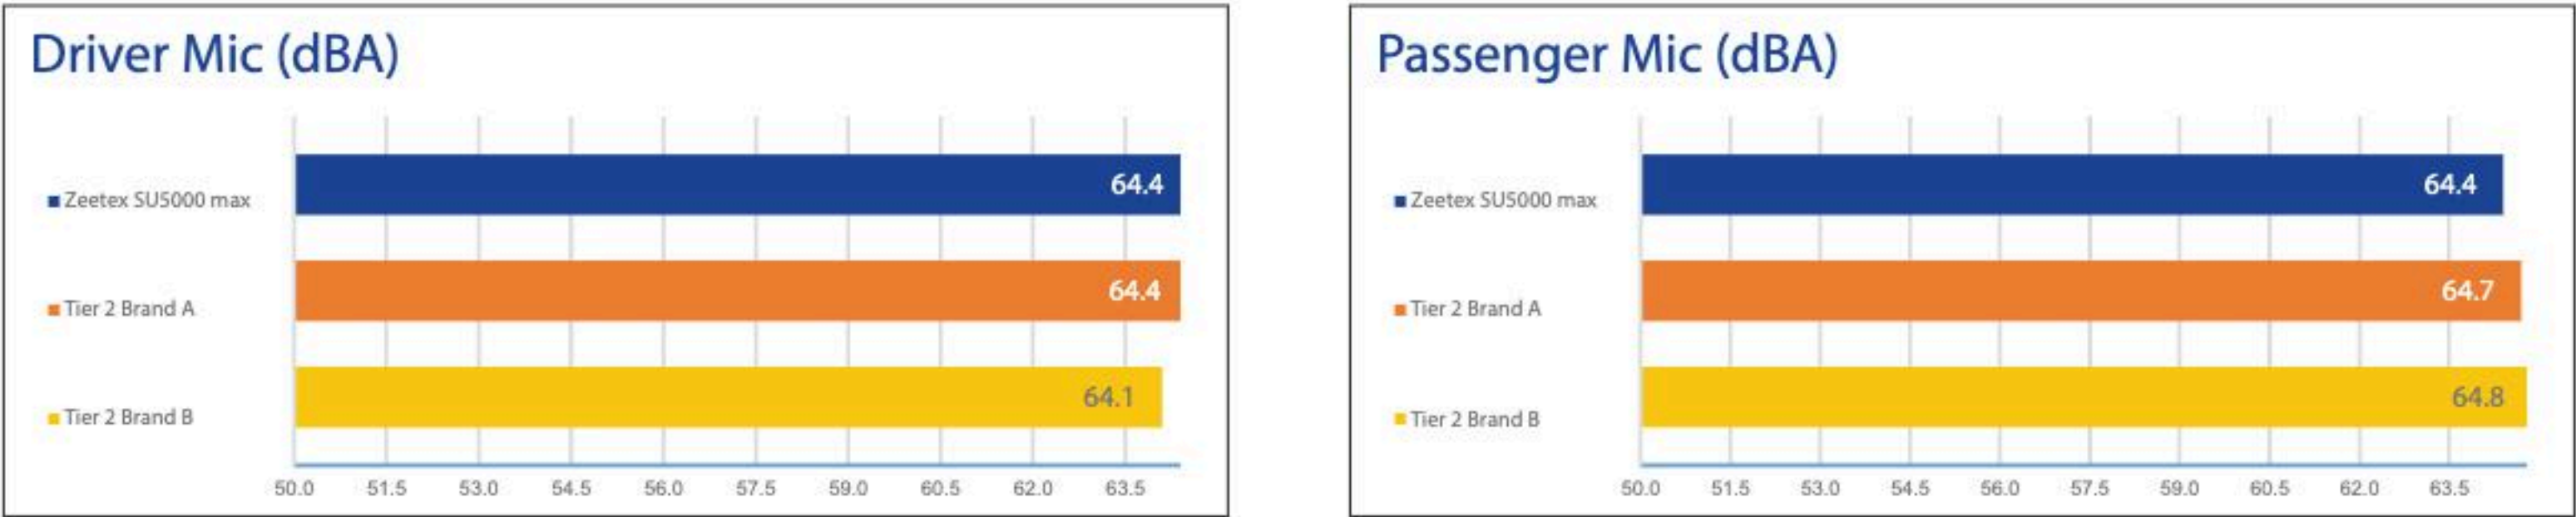


Internal Noise on Rough Road @ 80Km/h




Dry Braking Distance in Meters

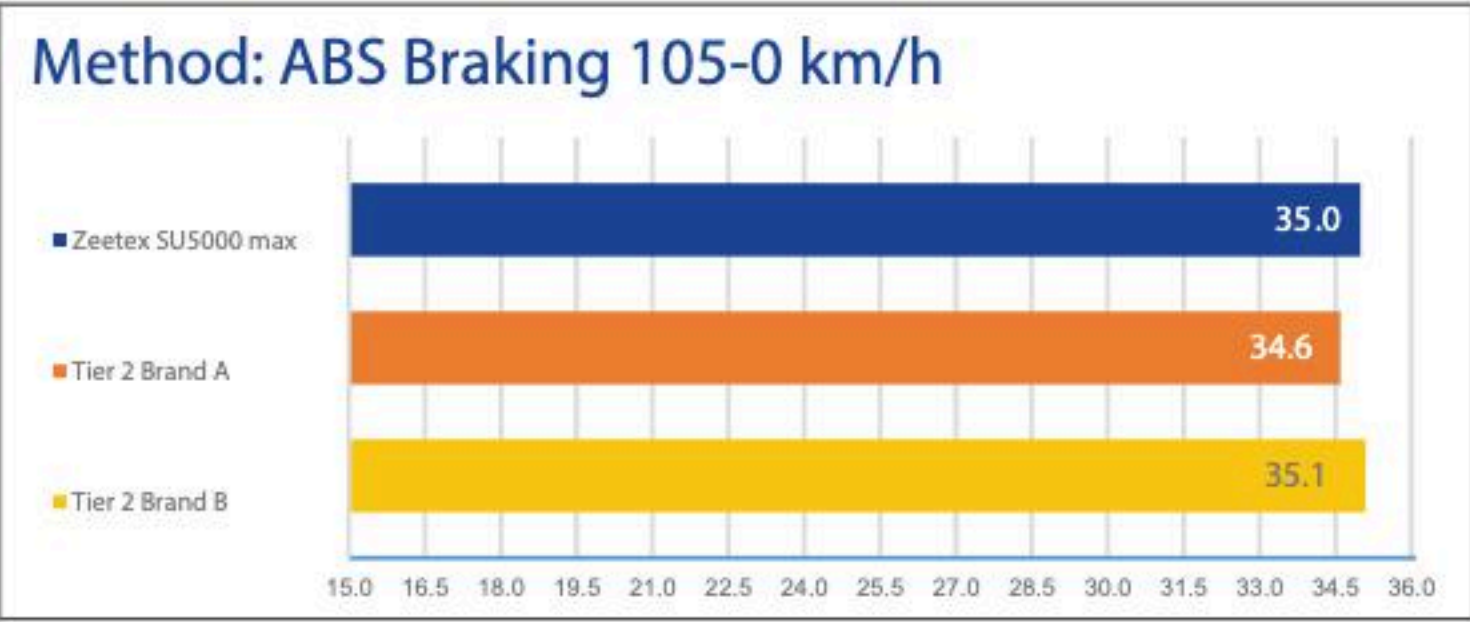

Dry Handling

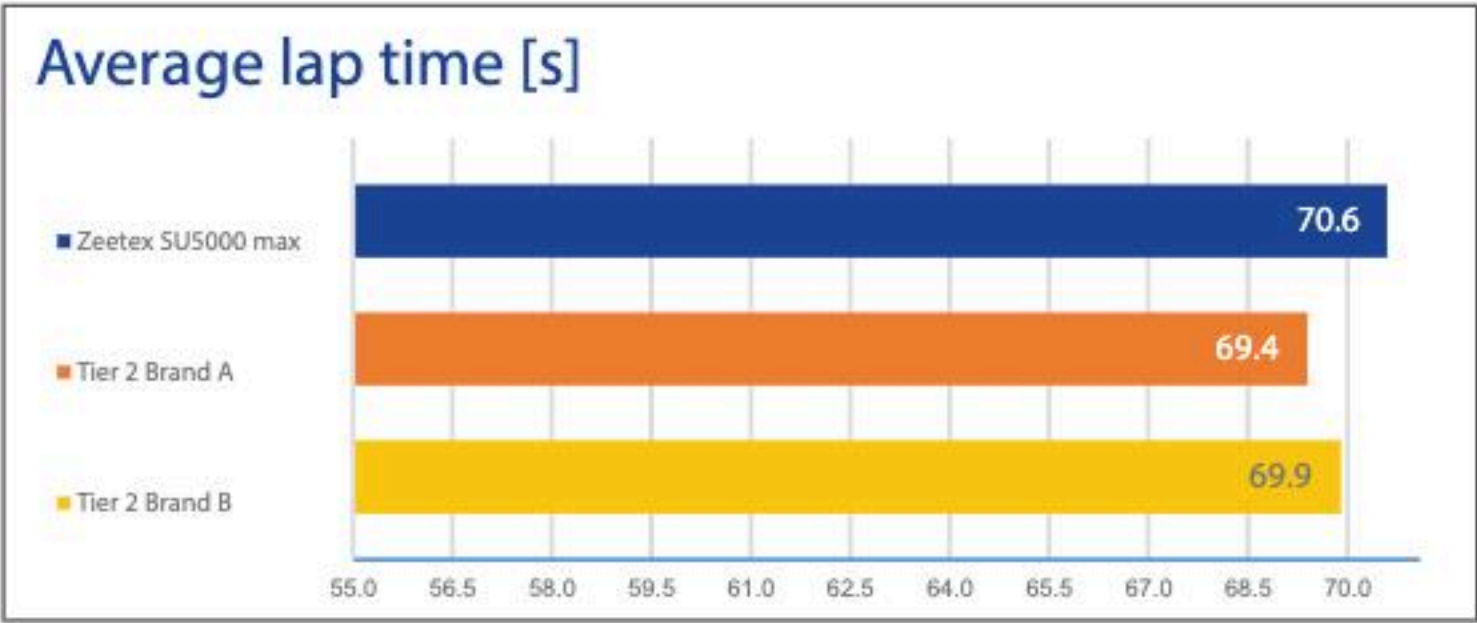

Wet Handling

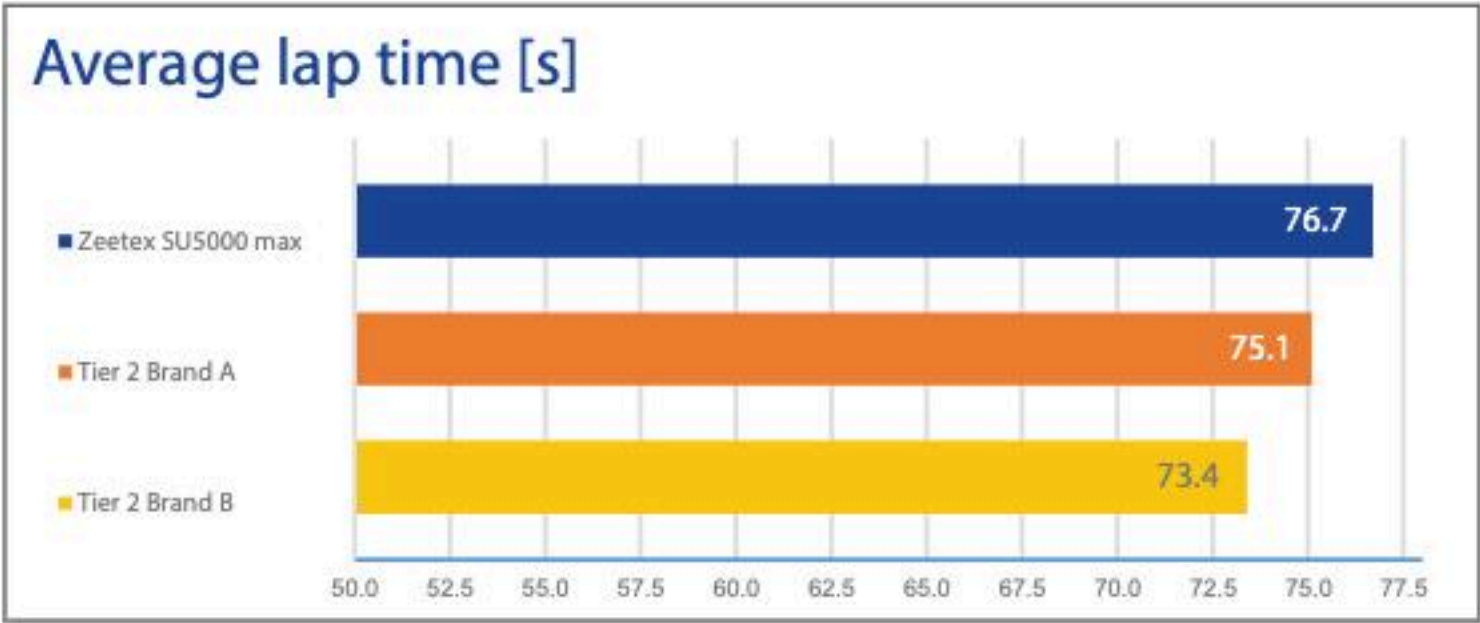

For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 300 AA A

SU6000 eco



Optimized construction
& tread design ensure wider footprint thereby having unparalleled road contact providing overall driving safety and stability



Specially engineered
sipes on the inner ribs reduce rolling resistance



Shoulder and inner ribs
with wider grooves retain excellent dry and wet braking performance and very good handling properties


Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
55 Series	255/55ZR18	109W	XL	1030	49	8.0	265	737	8.0
	225/55ZR19	99W		775	44	7.0	265	763	7.2
50 Series	265/50ZR20	111W	XL	1090	49	8.5	277	774	8.0
	235/50ZR17	100W	XL	800	49	7.5	245	668	7.2
45 Series	255/45ZR18	103W	XL	875	49	8.5	255	687	7.2
	275/45ZR20	110W	XL	1060	49	9.0	273	756	8.0
40 Series	245/40ZR20*	99W	XL	775	49	8.5	248	704	7.2
	265/40ZR20	104W	XL	900	49	9.5	271	720	8.0
	275/40ZR20	106W	XL	950	49	9.5	278	728	8.0
	265/40ZR21	105W	XL	925	49	9.5	271	745	8.0
35 Series	255/35ZR19	96W	XL	710	49	9.0	260	661	7.2
	285/35ZR22	106W	XL	950	49	10.0	290	759	8.0

* Newly added size


For Crossovers and Sports Utility Vehicles

SUMMER RANGE UTQG 500 A A


SU6001 eco

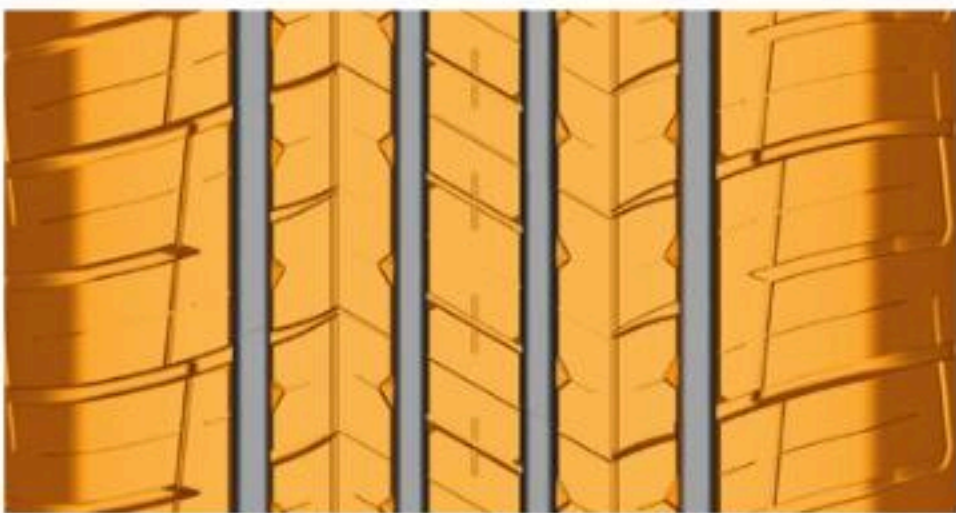

Optimized symmetrical tread design ensure wider footprint thereby having unmatched road contact providing overall driving safety and stability

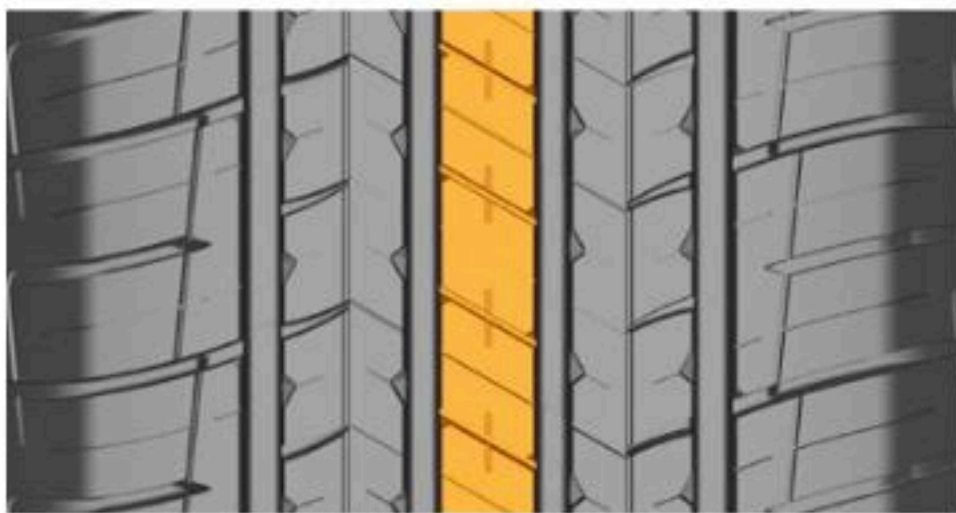

Rigid centre tread blocks provide precise steering fastness in the longitudinal drive

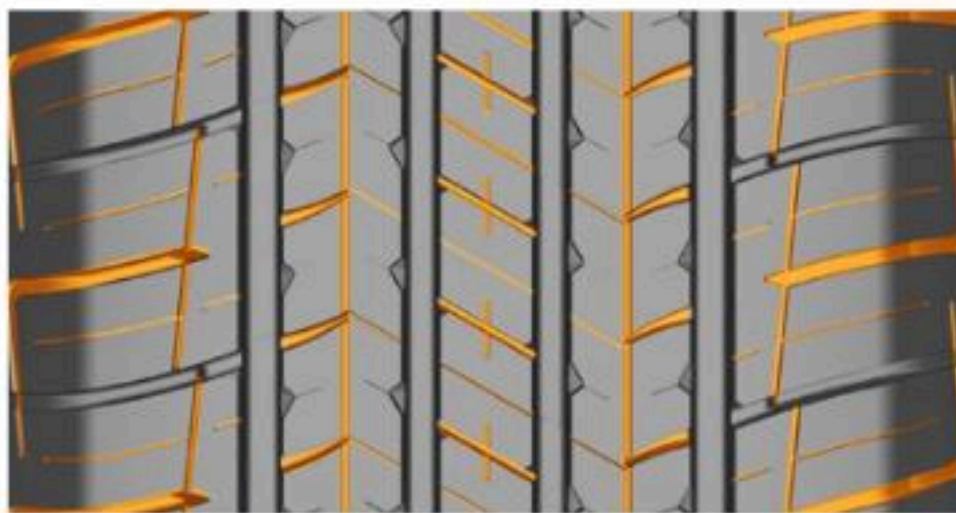

Multi typed sipes increase grip on wet and dry roads

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	235/75R15	105H	925	44	6.5	235	733	8.5
70 Series	225/70R16	103T	875	44	6.5	228	722	8.5
	235/70R16	106T	950	44	7.0	240	736	8.5
	245/70R16	111H	1090	50	7.0	248	750	8.8
	255/70R16	111H	1090	44	7.5	260	764	8.8
	265/70R16	112H	1120	44	8.0	272	778	8.8
65 Series	225/65R17	102H	850	44	6.5	228	724	8.5
	235/65R17	108H	1000	50	7.0	240	738	8.5
	245/65R17	111H	1090	50	7.0	248	750	8.8
	235/65R18	106H	950	44	7.0	240	763	8.5
60 Series	225/60R18	100H	800	44	6.5	228	727	8.5
	265/60R18	114H	1180	50	8.0	272	775	8.5

For 4x4's on Highway Terrain

SUMMER RANGE UTQG 540 A A

HT1000

The ZEETEX HT1000 is designed with a unique tread that offers low noise and superior handling on wet conditions to ensure an exceptionally comfortable highway ride.



Ultra-modern variable pitch tread design reduces road noise, creating additional driving comfort on highway terrain



Wavy sipes designed for outstanding braking performance on wet conditions



Wider circumferential & lateral grooves evacuate water quickly to overcome aquaplaning

							P METRIC	
Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	265/75R16	116T	1250	51	7.5	267	804	9.3
70 Series	215/70R16	100H	800	51	6.5	221	708	8.5
	225/70R16	103S	875	51	6.5	228	722	8.5
	235/70R16	106T	950	51	7.0	240	736	8.5
	245/70R16	107H	975	51	7.0	248	750	8.7
	265/70R16	112H	1120	51	8.0	272	778	8.5
	275/70R16	114T	1180	51	8.0	279	792	9.3
	245/70R17	110T	1060	51	7.0	248	776	8.5
	265/70R17	115H	1215	51	8.0	272	804	10.0
65 Series	235/65R16	103H	875	51	7.0	240	712	8.5
	225/65R17	102H	850	51	6.5	228	724	8.5
	265/65R17	112H	1120	51	8.0	272	776	9.3
	275/65R17	115H	1215	51	8.0	279	790	9.3
	285/65R17	116H	1250	51	8.5	292	802	9.3

									LT METRIC	
Series	Size	PR	Load Index / Speed Symbol	Max. Load (kgs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single	Dual	psi	inches	mm	mm	mm
Flotation	LT 31X10.50R15	6	109R	1030	-	51	8.5	268	781	13.0
85 Series	LT 215/85R16	10	115/112R	1215	1120	83	6.0	216	778	13.0
	LT 235/85R16	10	120/116R	1400	1250	83	6.5	235	806	13.0
75 Series	LT 225/75R16	10	115/112S	1215	1120	80	6.0	223	750	13.0
	LT 245/75R16	10	120/116S	1400	1250	80	7.0	235	806	13.0
	LT 265/75R16	10	123/120S	1550	1400	80	7.5	267	804	12.0
70 Series	LT 265/70R17	10	121/118S	1450	1320	80	8.0	272	804	13.0

For 4x4's on Highway Terrain

SUMMER RANGE UTQG 500 A B

HT1000 vfm



Ultra-modern "variable pitch" tread design offers low noise, meant for highway terrain



Wider circumferential grooves & lateral grooves evacuate water quickly defeating aquaplaning phenomena



Wavy sipes leading to outstanding braking performance on wet conditions and delivers enhanced ride comfort

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	235/75R15	105H	925	44	6.5	235	733	9.9
70 Series	215/70R16	100H	800	44	6.5	221	708	9.1
	225/70R16	103H	875	44	6.5	228	722	9.9
	235/70R16	106H	950	44	7.0	240	736	9.9
	245/70R16	111H XL	1090	50	7.0	248	750	9.9
	265/70R16	112H	1120	44	8.0	272	778	9.9
65 Series	225/65R17	102V	850	44	6.5	228	724	9.9
	265/65R17	112V	1120	44	8.0	272	776	9.9



HT5000 max

THE NEXT-GEN HIGHWAY TERRAIN TIRE

For 4x4's on Highway Terrain


SUMMER RANGE UTQG 500 A A

HT5000 max

This next-gen highway terrain tire is a trendsetter that features a unique asymmetrical pattern and a distinct sidewall design uncommon for a 4x4 tire. The HT5000 max is designed to maximize stability and handling while offering extra grip and a silent drive.



A unique asymmetrical tread design with a distinct sidewall enhances the appearance of any 4x4 vehicle

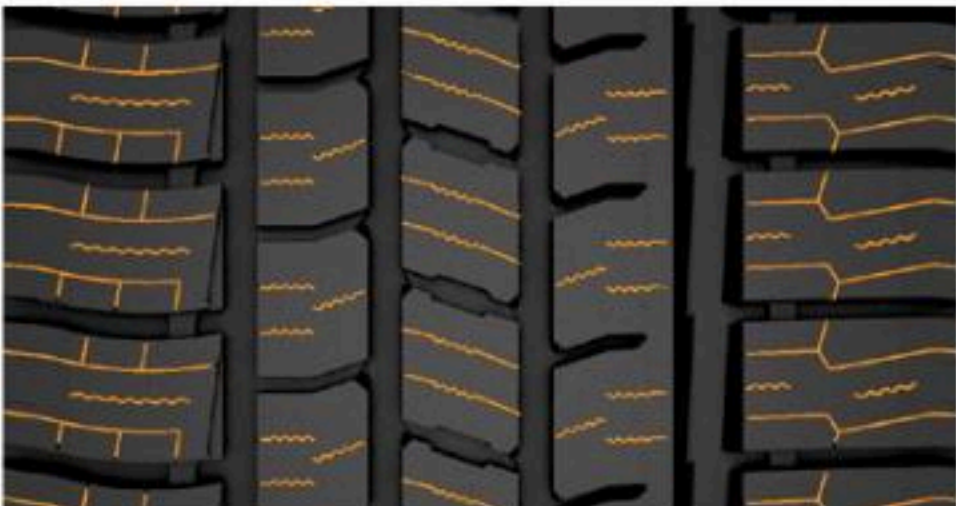

Zig-zag, multi-waves and straight sipes increase grip on wet and dry roads



Four circumferential main grooves offer better stability and handling and reduce noise while driving on highways

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	245/75R16	111T	1090	44	7.0	248	774	8.5
	265/75R16	116T	1250	44	7.5	267	804	8.5
70 Series	215/70R16	100H	800	44	6.5	221	708	8.5
	225/70R16	103H	875	44	6.5	228	722	8.5
	235/70R16	106H	950	44	7.0	240	736	8.5
	245/70R16	111H XL	1090	50	7.0	248	750	8.5
	255/70R16	111H	1090	44	7.5	260	764	8.5
	265/70R16	112H	1120	44	8.0	272	778	8.5
	265/70R17	115H	1215	44	8.0	272	804	8.5
	255/70R18	113H	1150	44	7.5	260	815	8.5
	265/70R18	116H	1250	44	8.0	272	829	8.5
65 Series	245/65R17	111H XL	1090	50	7.0	248	750	8.5
	265/65R17	112H	1120	44	8.0	272	776	8.5
	275/65R17	115H	1215	44	8.0	279	790	8.0
	285/65R17	116H	1250	44	8.5	292	802	8.3
	265/65R18	114H	1180	44	8.0	272	801	8.5

For 4x4's on Highway Terrain

SUMMER RANGE UTQG 500 A A

HT5000 max

This next-gen highway terrain tire is a trendsetter that features a unique asymmetrical pattern and a distinct sidewall design uncommon for a 4x4 tire. The HT5000 max is designed to maximize stability and handling while offering extra grip and a silent drive.



Performance results against Tier 2 brands tested in IDIADA, Spain

Tire size tested: 265/65R17 112H

Internal Noise on Smooth Road @ 60Km/h




Internal Noise on Smooth Road @ 80Km/h




Internal Noise on Rough Road @ 60Km/h




Internal Noise on Rough Road @ 80Km/h

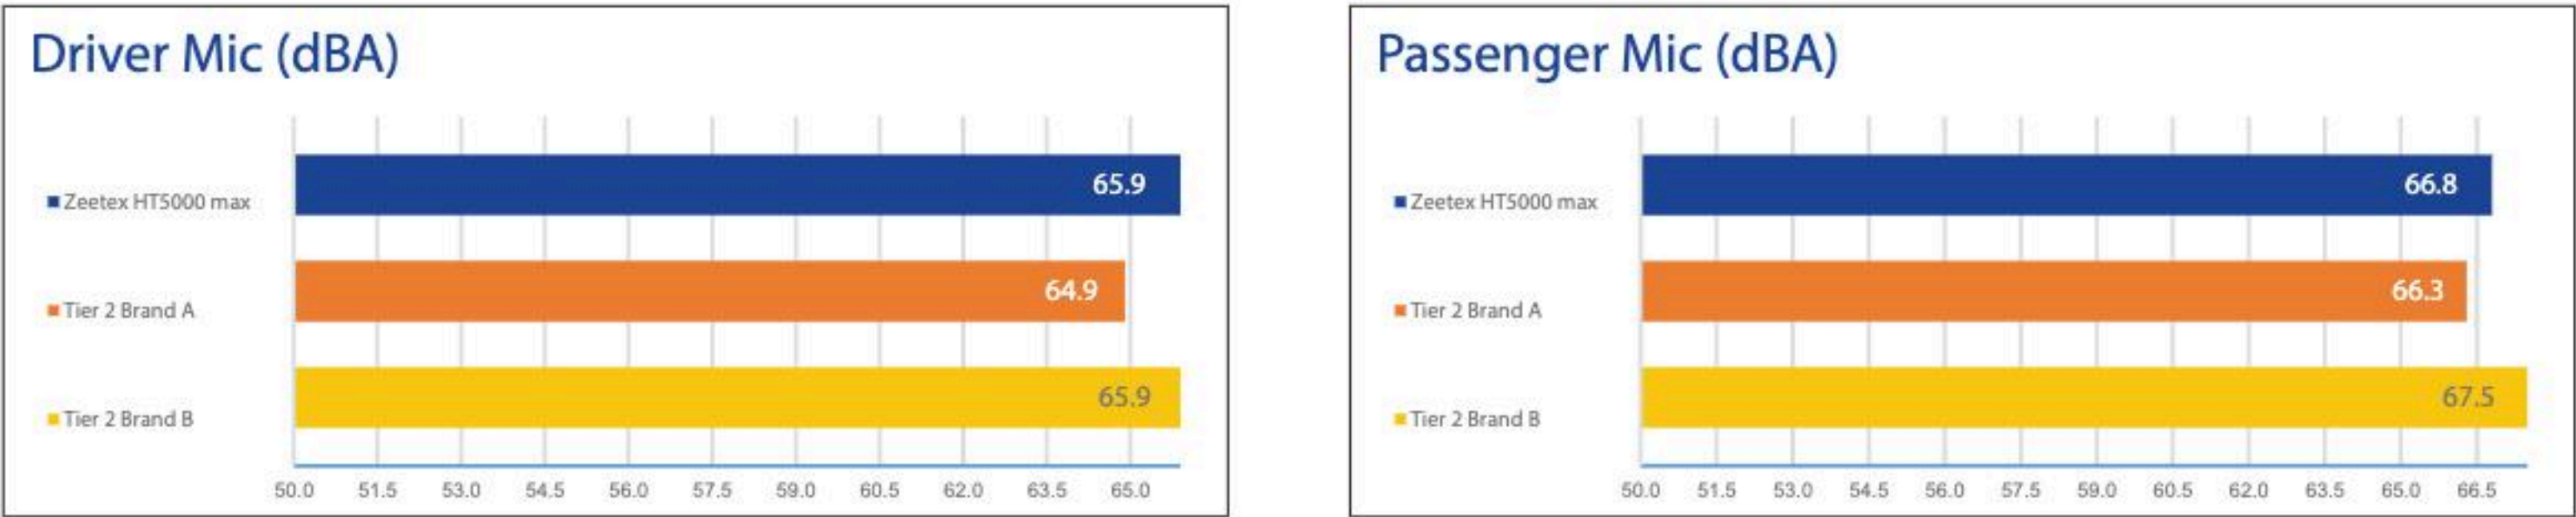

Dry Braking Distance in Meters

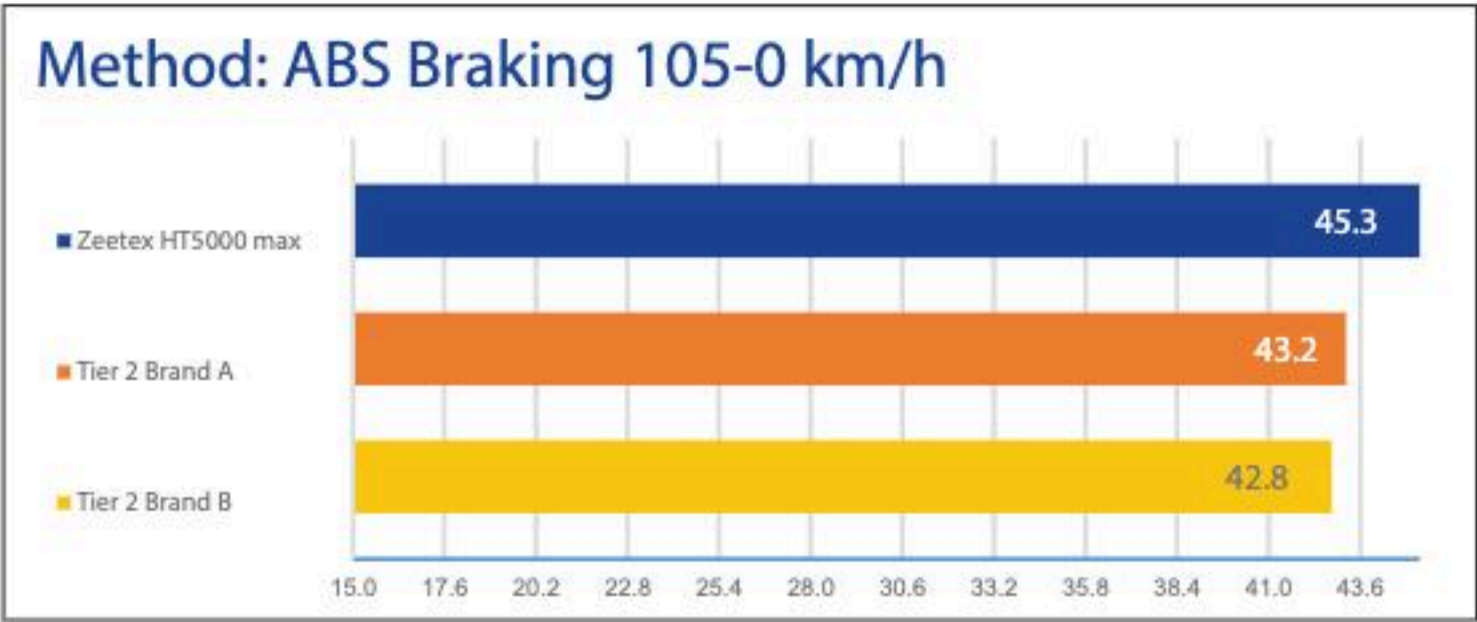

Dry Handling

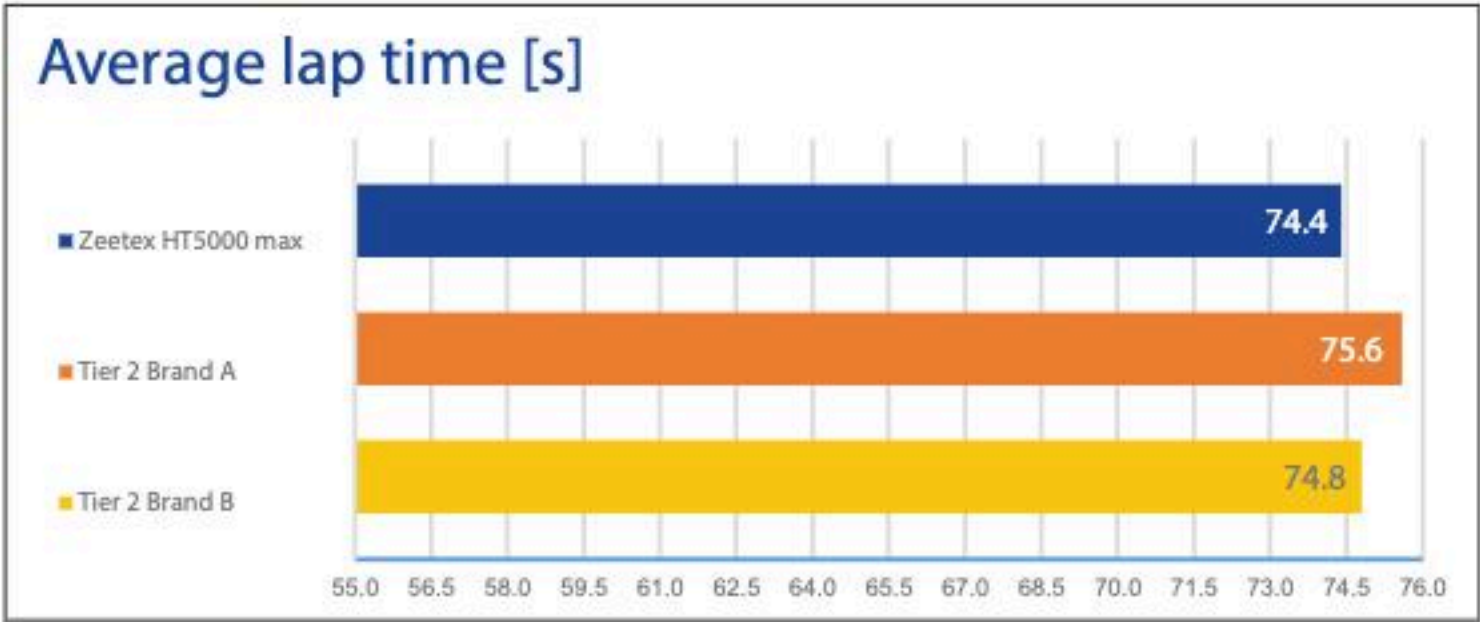

For 4x4's on Highway Terrain

SUMMER RANGE UTQG 400 A A


HT6000 eco



Symmetrical tread design with large shoulders blocks for optimized footprint and increased stability



Four zigzag grooves offers enhanced handling and drive comfort

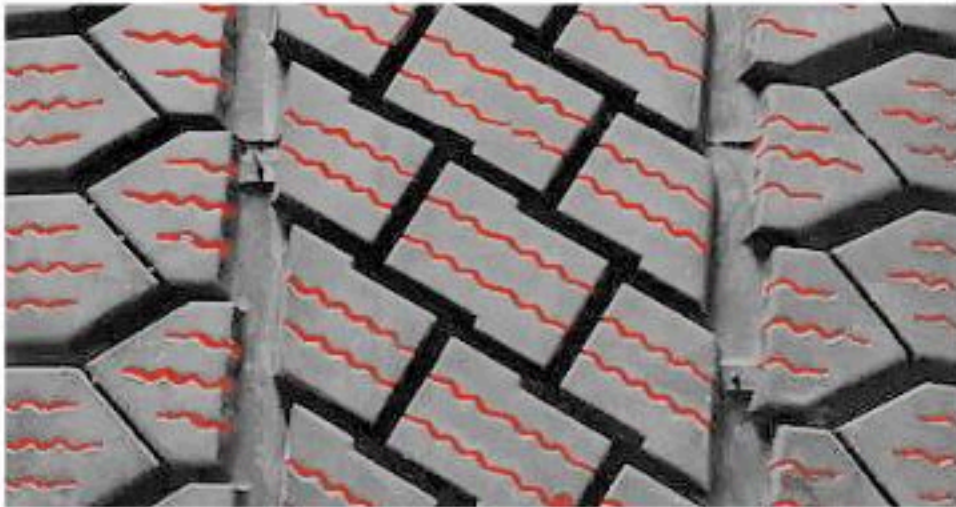


Multi-type sipes for optimal grip on different highway roads conditions

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	245/70R17	108H	1000	44	7.0	248	776	9.0
	265/70R17	113H	1150	44	8.0	272	804	9.0
65 Series	225/65R17	102H	850	44	6.5	228	724	9.0
	245/65R17	105H	925	44	7.0	248	750	9.0
	265/65R17	110H	1060	44	8.0	272	776	9.0
	285/65R17	115H	1215	44	8.5	292	802	9.0
	275/65R18	114H	1180	44	8.0	279	815	9.0
55 Series	275/55R20	117H XL	1285	50	8.5	284	810	9.0


For 4x4's on Highway Terrain

SUMMER RANGE UTQG 620 A B


HT6001 eco

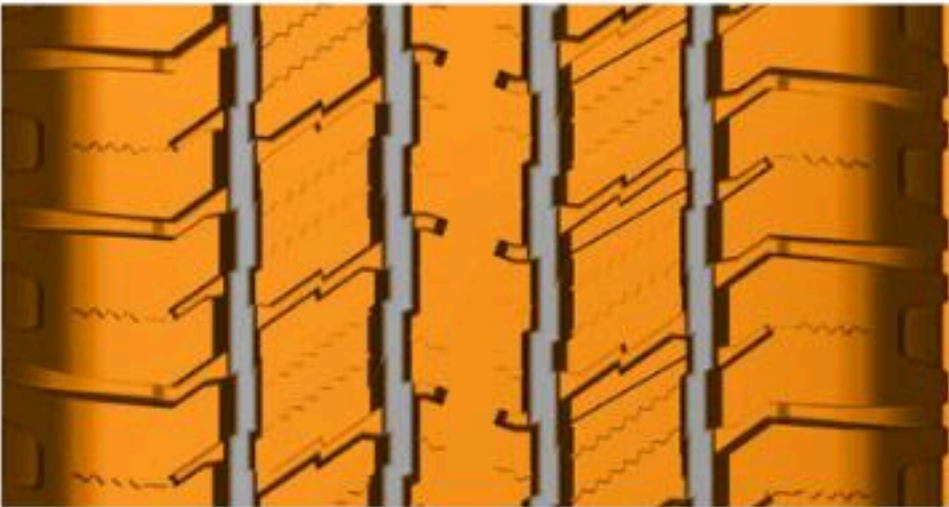

Optimized tread pattern
provide great ride comfort,
lower noise levels & handling
on the road

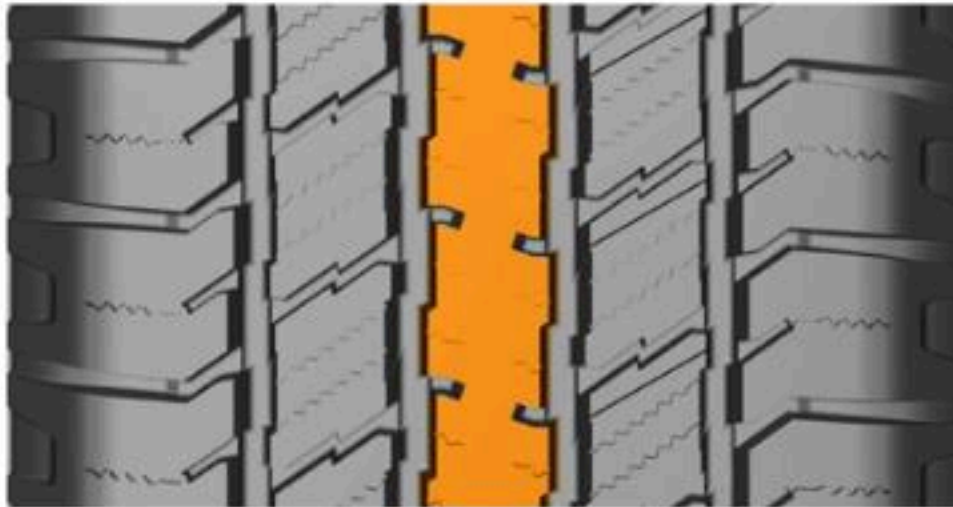

Solid center rib with optimal
provide steering stability
performance at high speed

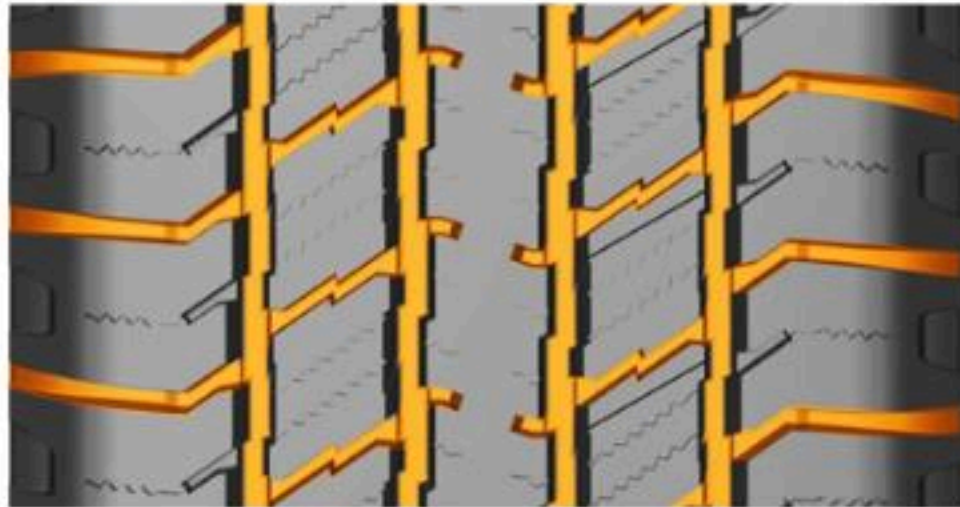

Wide open tread channels
to evacuate water rapidly for
better road grip


Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	235/75R15	108T XL	990	50	6.5	235	733	10.5
70 Series	225/70R16	103T	825	44	6.5	228	722	10.5
	245/70R16	111T XL	1090	50	7.0	248	750	10.5
	255/70R16	109T	1030	44	7.5	260	764	10.5

For 4x4's on All Terrain

SUMMER RANGE UTQG 500 A B

AT1000

The ZEETEX AT1000 is engineered with special base rubber to deliver optimal performance on all types of terrain while ensuring a quiet and comfortable ride.

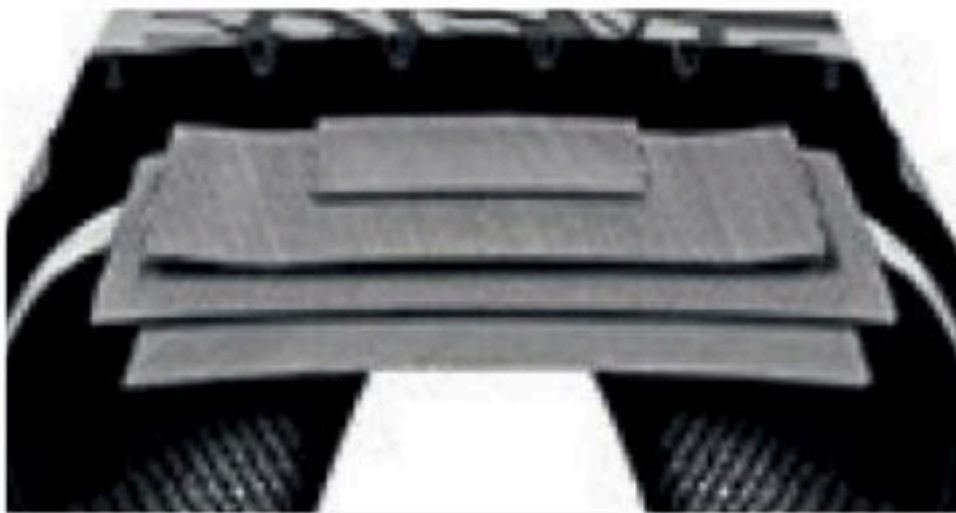

Cap-base construction with special base rubber delivers exceptional comfort and handling in both on & off-road conditions



Aggressive block design ensures better handling on all types of terrain while reducing road noise



Coupling blocks enhance dry grip and steering response; sipes enhance traction in wet conditions


							P METRIC	
Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
80 Series	195/80R15	96S	710	51	5.5	196	693	9.1
75 Series	215/75R15	100S	800	51	6.0	216	703	9.5
	235/75R15	105S	925	51	6.5	235	733	9.5
	245/75R16	111S	1090	51	7.0	248	774	9.5
70 Series	205/70R15	96T	710	51	6.0	209	669	10.0
	255/70R15	108S	1000	51	7.5	260	739	9.9
	255/70R16	111S	1090	51	7.5	260	764	9.5
	265/70R17	115S	1215	51	8.0	272	804	9.5
65 Series	215/65R16	98T	750	51	6.5	221	686	9.5
	255/65R16	109T	1030	51	7.5	260	738	9.5
	265/65R17	112S	1120	51	8.0	272	776	9.5

									LT METRIC	
Series	Size	PR	Load Index / Speed Symbol	Max. Load (kgs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single	Dual					
						psi	inches	mm	mm	mm
Flotation	LT 31X10.50R15	6	109Q	1030	-	51	8.5	268	775	11.9
85 Series	LT 235/85R16	10	120/116Q	1400	1250	80	6.5	235	806	11.9
80 Series	LT 205/80R16	8	110/108Q	1060	1000	80	5.5	203	734	9.5
	LT 235/80R17	10	120/117R	1400	1285	80	6.5	235	808	12.2
75 Series	LT 225/75R16	10	115/112R	1215	1120	80	6.0	223	744	13.0
	LT 245/75R16	10	120/116R	1400	1250	80	7.0	235	806	13.0
	LT 265/75R16	10	123/120Q	1550	1400	80	7.5	267	804	11.9
	LT 285/75R16	10	126/123R	1700	1550	80	8.0	286	834	13.0
	LT 245/75R17	10	121/118R	1450	1320	80	7.0	248	800	12.3
70 Series	LT 245/70R17	10	119/116R	1360	1250	80	7.0	248	776	13.0
	LT 265/70R17	10	121/118S	1450	1320	80	8.0	272	804	12.3
	LT 285/70R17	10	121/118R	1450	1320	80	8.5	292	833	13.0
	LT 275/70R18	10	125/122S	1650	1500	80	8.0	279	843	12.7
65 Series	LT 275/65R18	10	123/120S	1550	1400	80	8.0	279	815	12.4
	LT 275/65R20	10	126/123S	1700	1550	80	8.0	279	866	11.9
55 Series	LT 285/55R20	10	122/119R	1500	1360	80	9.0	297	822	11.9
	LT 305/55R20	10	121/118S	1450	1320	65	9.5	316	844	11.9


For 4x4's on Mud Terrain
SUMMER RANGE

MT1000

The ZEETEX MT1000 is built with stronger sidewall to provide a confident ride in all off-road conditions while minimizing impact damage.

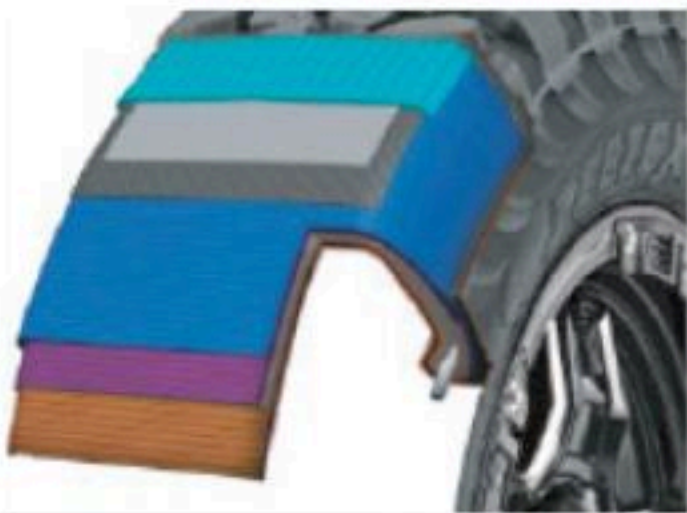

3 ply polyester construction leads to a stronger sidewall and offers extra-ordinary resistance against impacts in off-roads

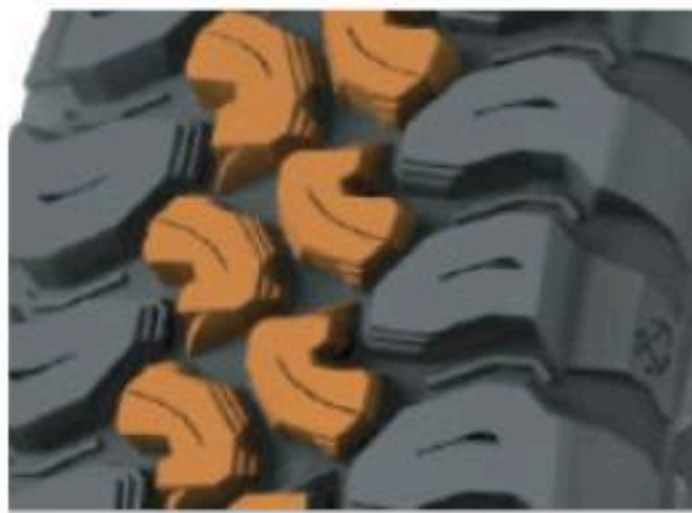

Anchor type aggressive tread blocks deliver remarkable off-road traction



Alternate scalloped shoulder lugs provide longer distance between shoulder blocks maximizing biting edges to increase traction in mud & rocks




Wide open shoulders and stepped block edges allow easy flushing of mud & silt

Series	Size	PR	Load Index / Speed Symbol	Max. Load (kgs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single	Dual					
75 Series	LT 235/75R15	6	104/101Q	900	825	51	9.5	235	736	13.7
Flotation	LT 35X12.50R17	10	125Q	1650	-	65	10.0	318	883	16.5
	LT 35X12.50R18	10	123Q	1550	-	65	10.0	318	883	16.5
	LT 33X12.50R20	10	114Q	1180	-	65	10.0	318	832	16.5
	LT 35X12.50R20	10	121Q	1450	-	65	10.0	318	883	16.5
	LT 37X13.50R20	10	127Q	1750	-	65	11.0	345	934	16.5

For 4x4's on Mud Terrain
SUMMER RANGE

MT6000 eco

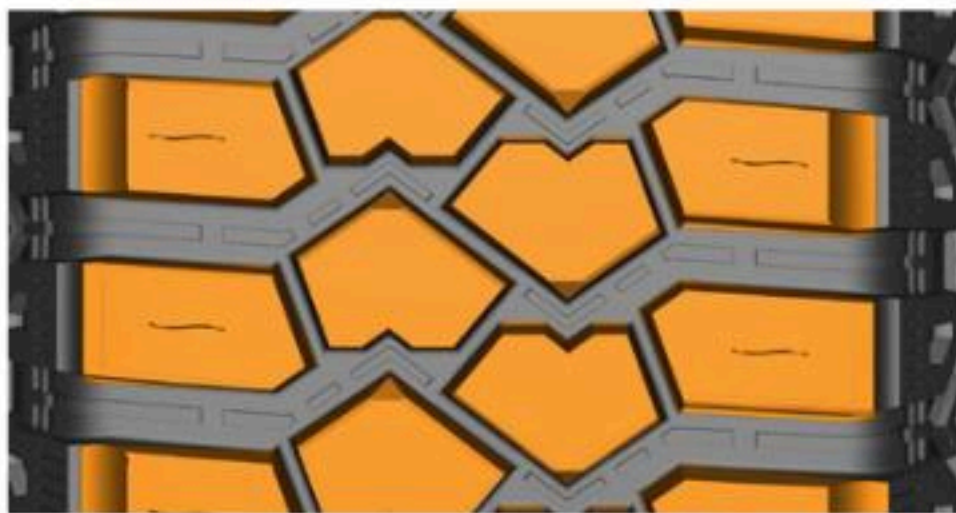

Aggressive tread blocks maintain great off-road traction & grip on mud and loose soil




Reinforced top sidewall with increased rubber thickness for optimal protection against critical sidewall failure zone and to improve the tear resistance



Cut & chip resistance tread rubber compound withstands off-road abuse while driving on extremely tough road conditions & mud terrains

Series	Size	PR	Load Index / Speed Symbol	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
75 Series	LT 265/75R16	10	123/120Q	1550	1400	80	7.5	267	804	16.5
	LT 285/75R16	10	126/123Q	1700	1550	80	8.0	286	834	16.5
70 Series	LT 265/70R17	10	121/118Q	1450	1320	80	8.0	272	778	16.5
	LT 285/70R17	10	121/118Q	1450	1320	80	8.5	292	832	16.5
Flotation	LT 33X12.50R17	8	114Q	1180	-	51	10.0	318	826	16.5
	LT 35X12.50R17	10	121Q	1450	-	65	10.0	318	877	16.5
	LT 35X12.50R18	10	123Q	1550	-	65	10.0	318	877	16.5

CT1000

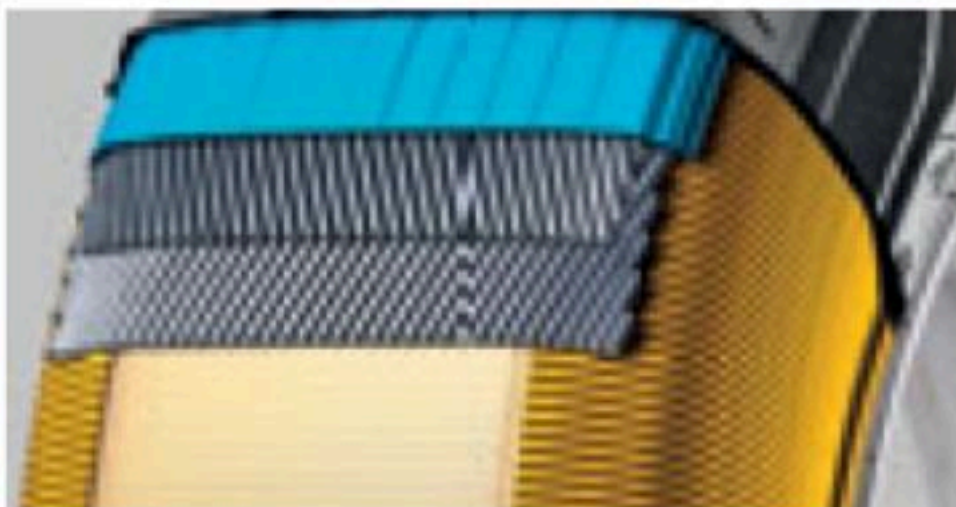

Most rugged casing construction to withstand severe load; superior compounding ensures longer mileage




Shoulders' profile ensures flat footprint, thereby offering extra-ordinary resistance against irregular wear




Extremely good handling & road grip in both dry & wet conditions

Series	Size	PR	Load Index / Speed Symbol	Max. Load (kgs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single	Dual	psi	inches	mm	mm	mm
LTRC	185R14C	8	102/100S	850	800	65	5.5	188	653	10.0
	195R14C	8	106/104S	950	900	65	5.5	198	666	9.0
	195R15C	8	106/104Q	950	900	65	5.5	198	690	9.0

CT3000

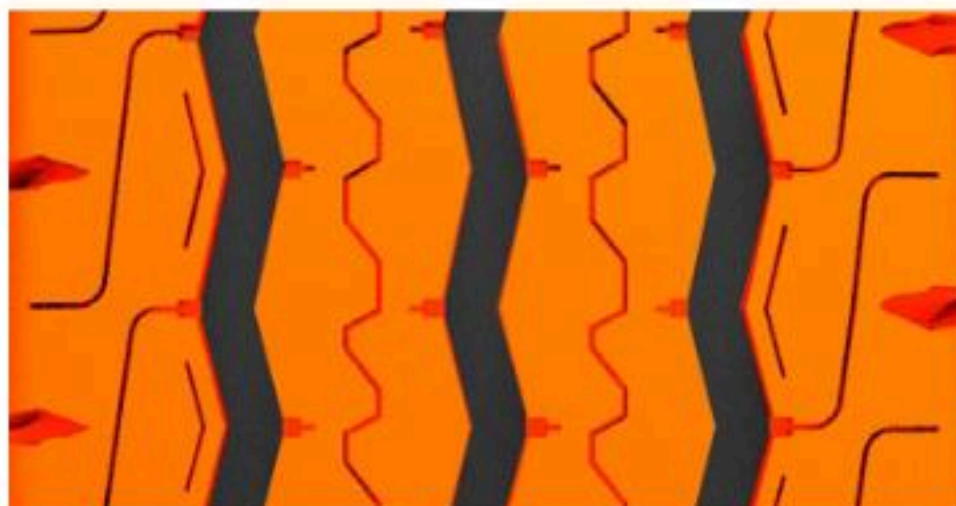

Rib type tread design with shoulder lugs provides better cornering, stability & resistance against irregular wear in the most demanding conditions

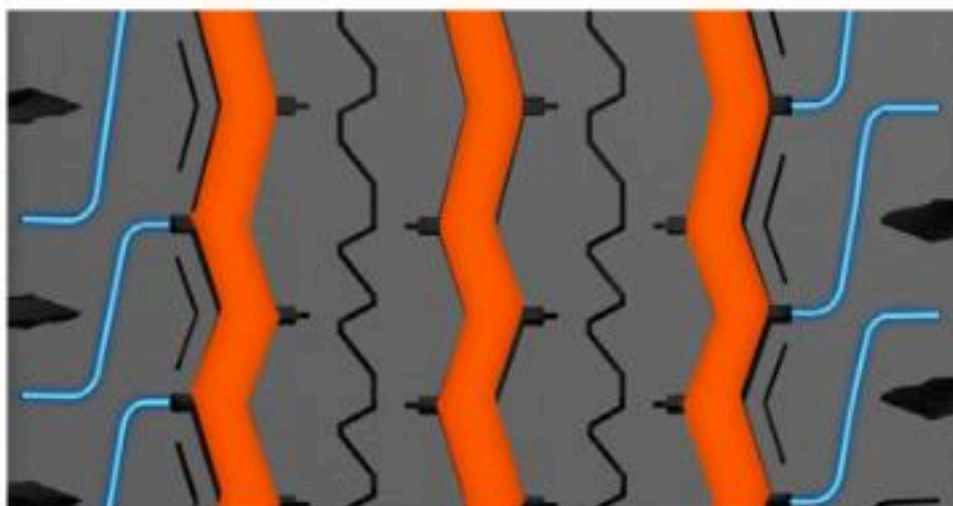

Circumferential zig-zag grooves & rib sipes give quicker water clearance & provides maximum on-road grip in both wet and dry conditions



Special compound for the belt edge reduces the heat & the rolling resistance during the tire service


Series	Size	PR	Load Index / Speed Symbol	Max. Load (kgs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single	Dual	psi	inches	mm	mm	mm
LTRC	195R14C*	8	106/104S	950	900	65	5.5	198	666	9.5
	195R15C*	8	106/104Q	950	900	65	5.5	198	690	9.7

*Available in both BSW & WSW sidewall styles


CT6000 eco



Rugged construction helps in withstanding challenging conditions in cargo transport

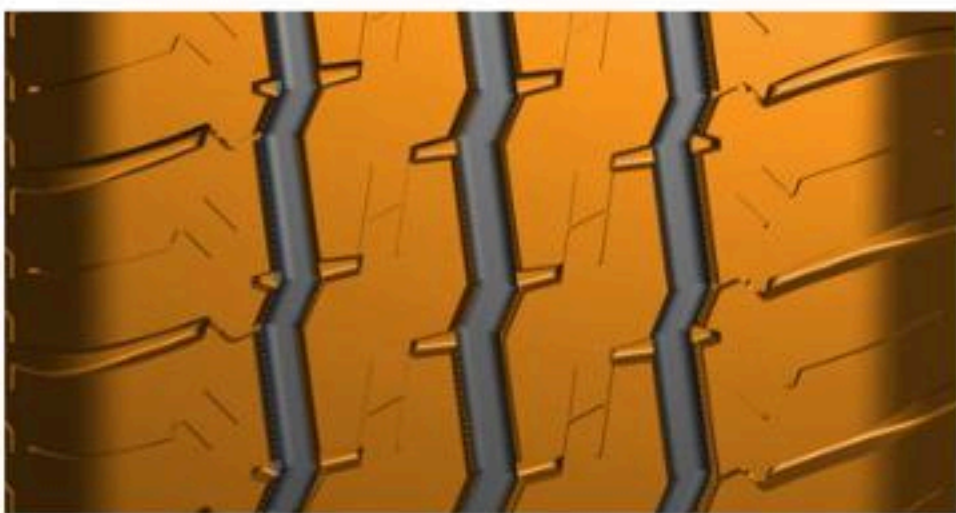

Specially designed tread pattern with shoulder lugs provides better cornering, stability & resistance against off-road abuse

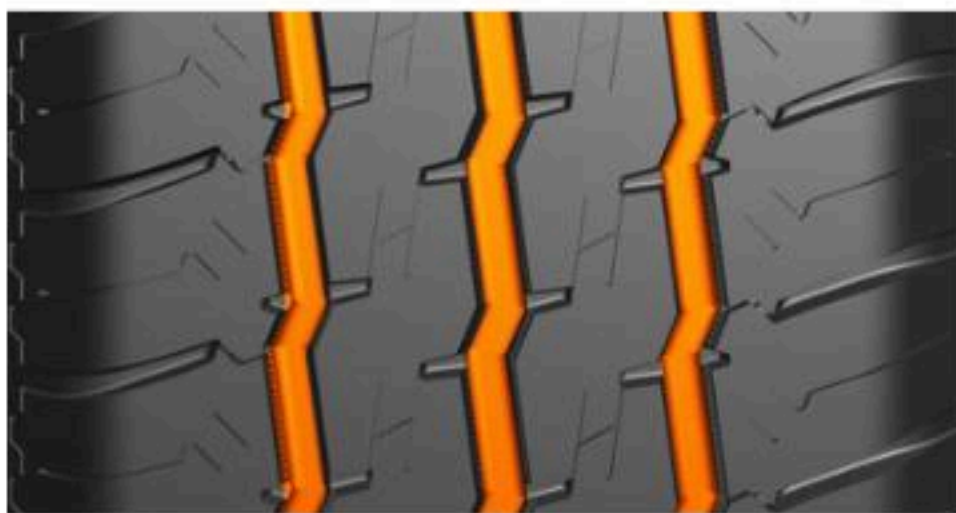

Zig-zag circumferential grooves help in quicker water evacuation to overcome aquaplaning and providing extra-ordinary road grip in wet conditions

Series	Size	PR	Load Index / Speed Symbol	Max. Load (kgs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single	Dual					
75 Series	185/75R16C	8	104/102T	900	850	69	5.0	184	684	8.0
	195/75R16C	8	107/105T	975	925	69	5.5	196	698	8.0
	205/75R16C	8	110/108T	1060	1000	69	5.5	203	714	8.0
	215/75R16C	8	113/111T	1150	1090	69	6.0	216	728	8.0
70 Series	175/70R14C	8	95/93T	690	650	54	5.0	177	602	8.0
	195/70R15C	8	104/102T	900	850	65	6.0	201	655	8.0
	215/70R15C	8	109/107T	1030	975	65	6.5	221	683	8.0
	225/70R15C	8	112/110T	1120	1060	65	6.5	228	697	8.0
65 Series	205/65R15C	6	102/100T	850	800	69	6.0	209	647	8.0
	195/65R16C	8	104/102T	900	850	69	6.0	201	660	8.0
	205/65R16C	8	107/105T	975	925	69	6.0	209	672	8.0
	215/65R16C	10	109/107T	1030	975	69	6.5	221	686	8.0
	225/65R16C	8	112/110T	1120	1060	69	6.5	228	698	8.0
	235/65R16C	10	115/113T	1215	1150	69	7.0	240	712	8.0
LTRC	185R14C	8	102/100T	850	800	65	5.5	189	652	8.0
	195R14C	8	106/104T	950	900	65	5.5	196	668	8.0


For Vans and Transport Vehicles

SUMMER RANGE


CT6001 eco



Wider tread design for excellent riding stability, which ensures safety and high mileage

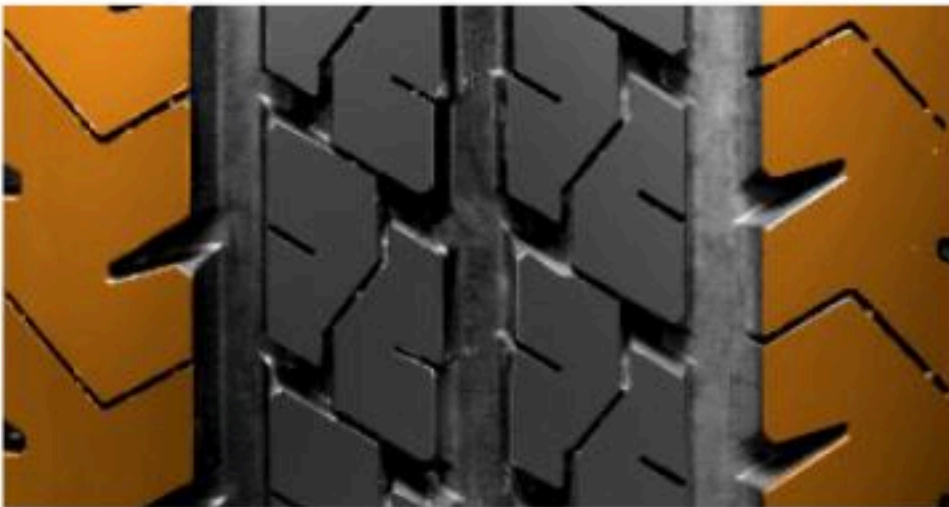

Optimal footprint due to wider shoulders' profile for enhanced stability

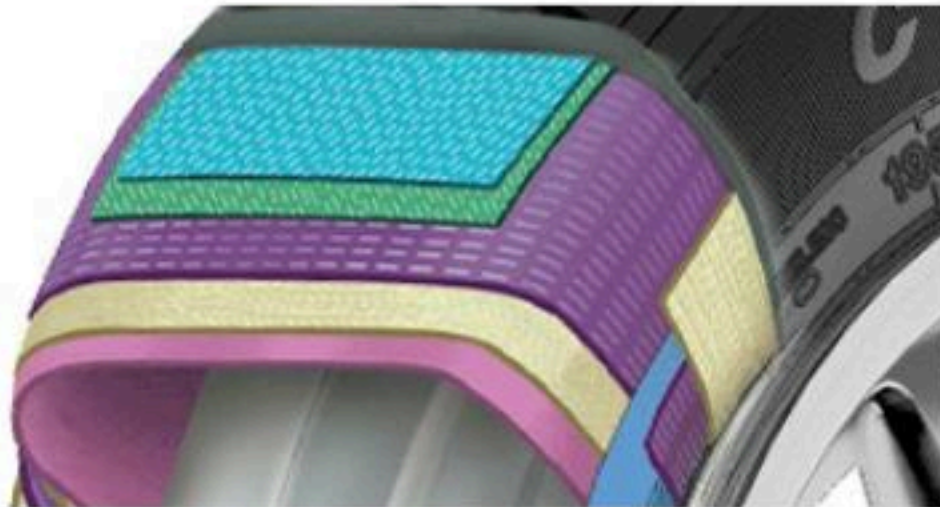

Heavy duty casing construction that can withstand overload; stone ejectors to prevent casing damage

Series	Size	PR	Load Index / Speed Symbol	Max. Load (kgs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single	Dual	psi	inches	mm	mm	mm
LTRC	195R15C	8	106/104R	950	900	65	5.5	196	690	9.0







ZEETEX

www.zeetex-mea.com



Zeetex MEA



@zeetexmea



Zeetex MEA