



ZEETEX

MAX

**PASSENGER CAR & LIGHT TRUCK TYRES
CATALOG (MAX RANGE)**



ZT5000 *max*

THE NEXT-GEN PASSENGER TIRE

For Passenger Cars


UTQG 500 A A

ZT5000 max


This next-gen passenger tire offers enhanced performance during wet conditions. A closed shoulder block design allows better steering response and tire longevity.



Wide positioning of four main grooves eject water at a faster rate for improved wet grip

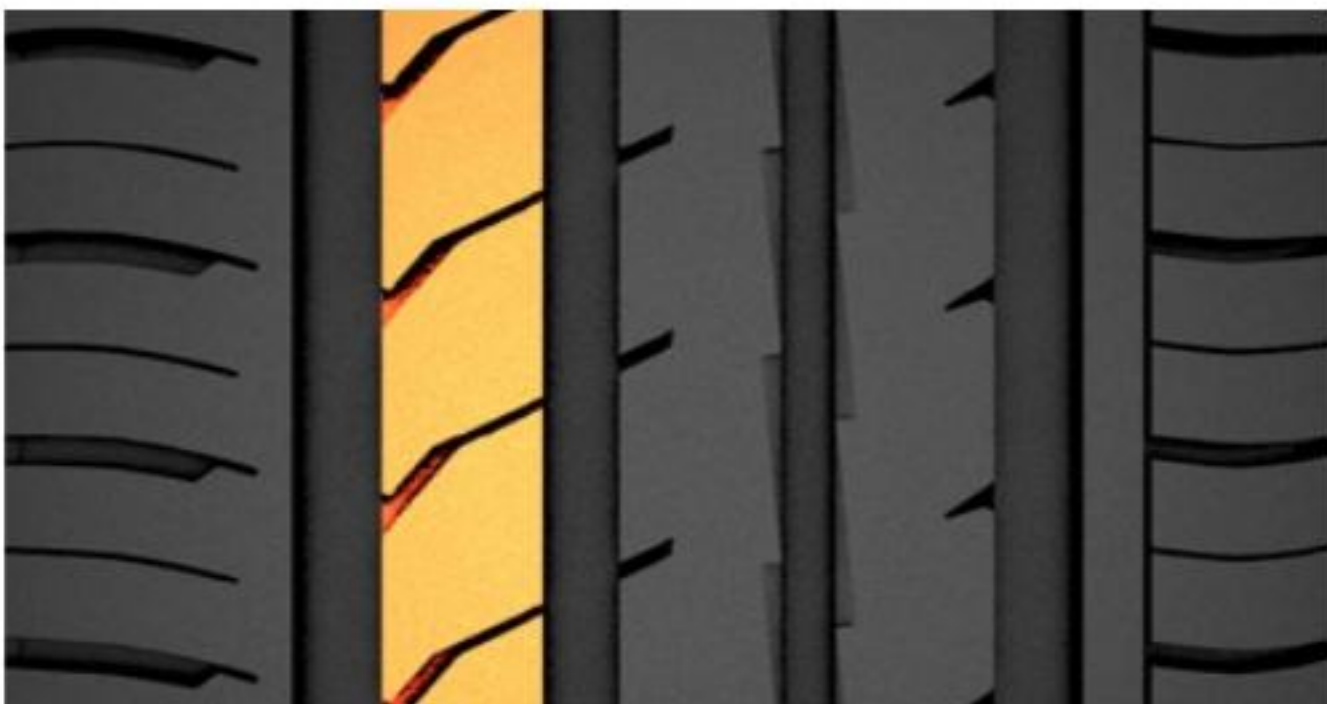

Angular sipes and rigid blocks on the inner side increase road grip and traction while cornering

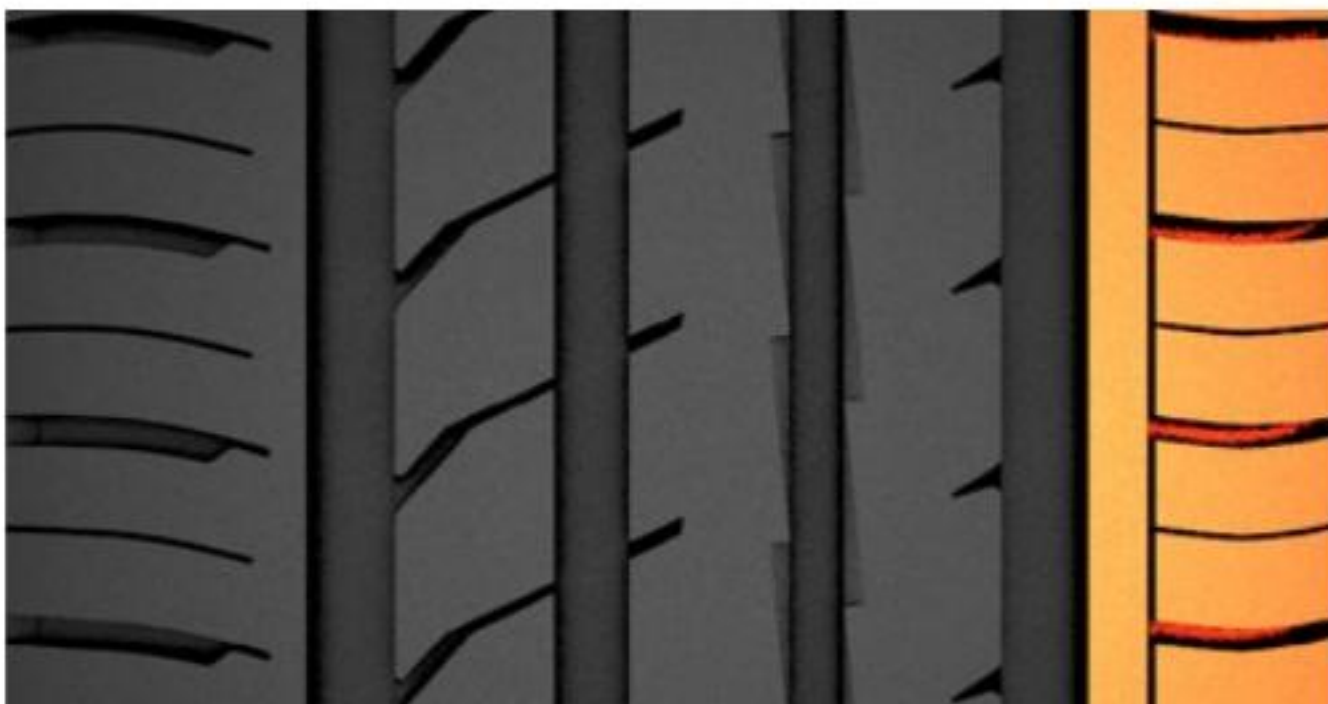


Closed shoulder blocks enhance steering response and stability while preventing irregular wear


Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
70 Series	175/70R14	88H	XL	560	50	5.0	177	602	7.6
	185/70R14	88H		560	44	5.5	189	616	7.6
	195/70R14	95H	XL	690	50	6.0	201	625	7.6
	205/70R15	96H		710	44	6.0	209	664	7.8
	215/70R15	98H		750	44	6.5	221	678	7.8
65 Series	165/65R14	79H		437	44	5.0	170	565	7.0
	175/65R14	82H		475	44	5.0	177	584	7.6
	185/65R14	86H		530	44	5.5	189	596	7.6
	185/65R15	88H		560	44	5.5	189	616	7.8
	195/65R15	91H		615	44	6.0	201	630	7.8
	205/65R15	94V		670	44	6.0	209	642	7.8
	205/65R16	95V		690	44	6.0	209	672	7.8
	215/65R16	98H		750	44	6.5	221	686	7.8
60 Series	175/60R15*	81H		462	44	5.0	177	586	7.8
	185/60R15	84H		500	44	5.5	189	598	7.8
	195/60R15	88H		560	44	6.0	201	610	7.8
	205/60R15	91V		615	44	6.0	209	622	7.8
	195/60R16	89H		580	44	6.0	201	640	7.8
	205/60R16	92V		630	44	6.0	209	648	7.8
	215/60R16	99V	XL	775	50	6.5	221	664	7.8
	225/60R16	102V	XL	850	50	6.5	228	671	7.8
	215/60R17	96H		710	44	6.5	221	690	7.8
	225/60R17	99V		775	44	6.5	228	697	8.3
55 Series	185/55R15*	82V		475	44	6.0	194	580	7.8

* Newly added size

ZT5000 max - GSO Ratings

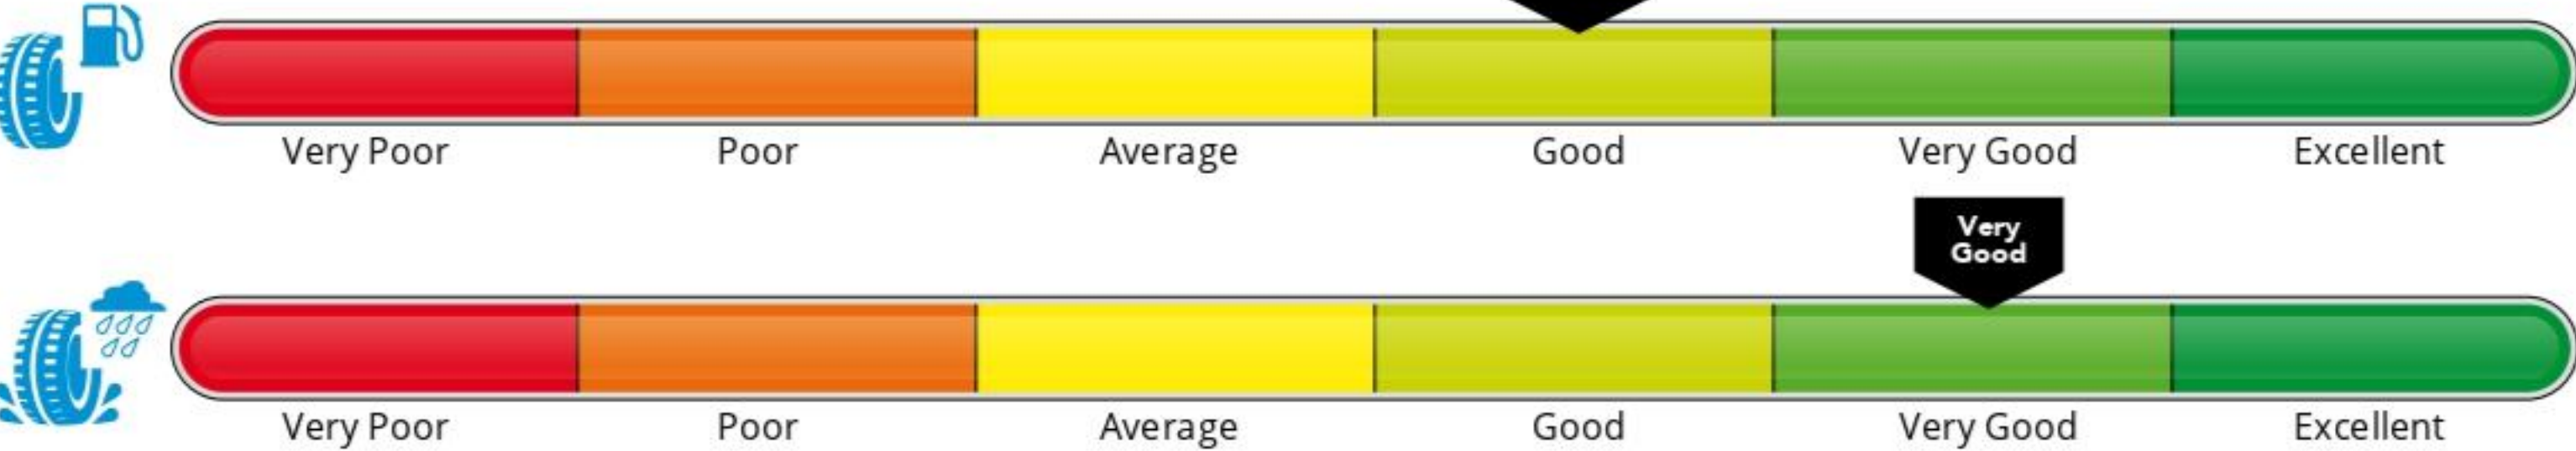

ZT5000 max - Noise Rating as per EU labeling

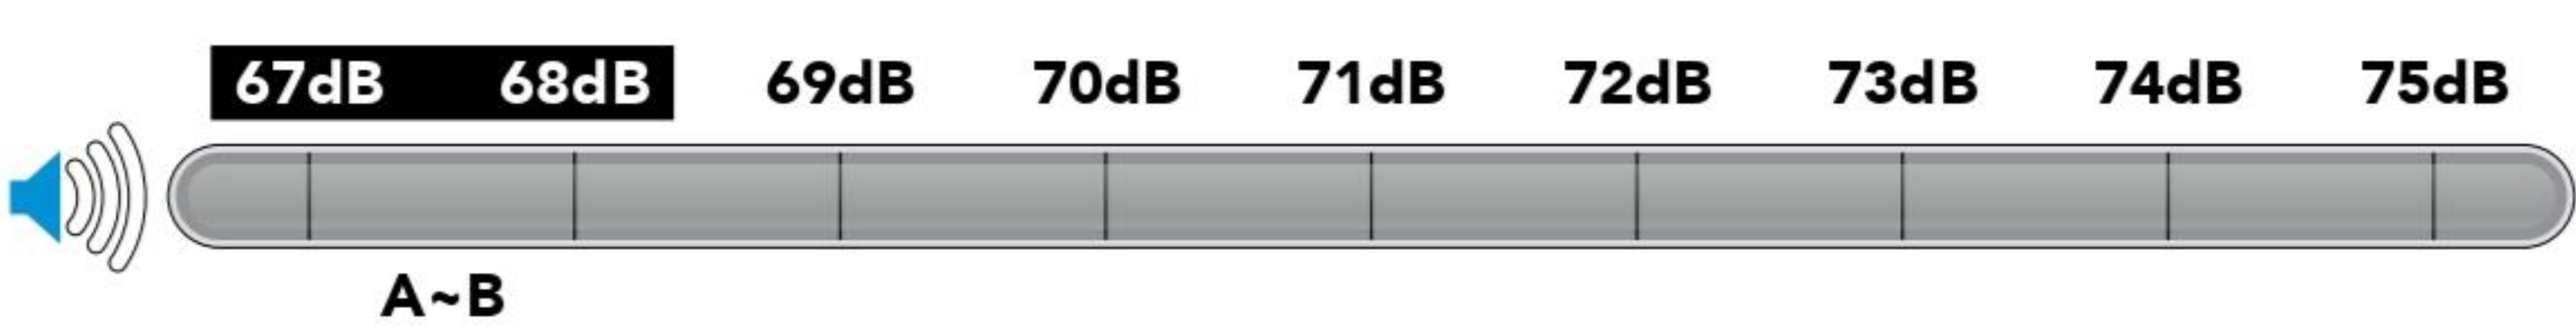

Pattern availability may slightly vary based on country, please reach out to your account manager for details.





HP5000 max

THE NEXT-GEN ULTRA-HIGH PERFORMANCE TIRE

For High-performance and Luxury Vehicles


UTQG 340 A A

HP5000 max

This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique “helical” main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.



Ultra-modern tread and sidewall design suitable for modern vehicles and roads

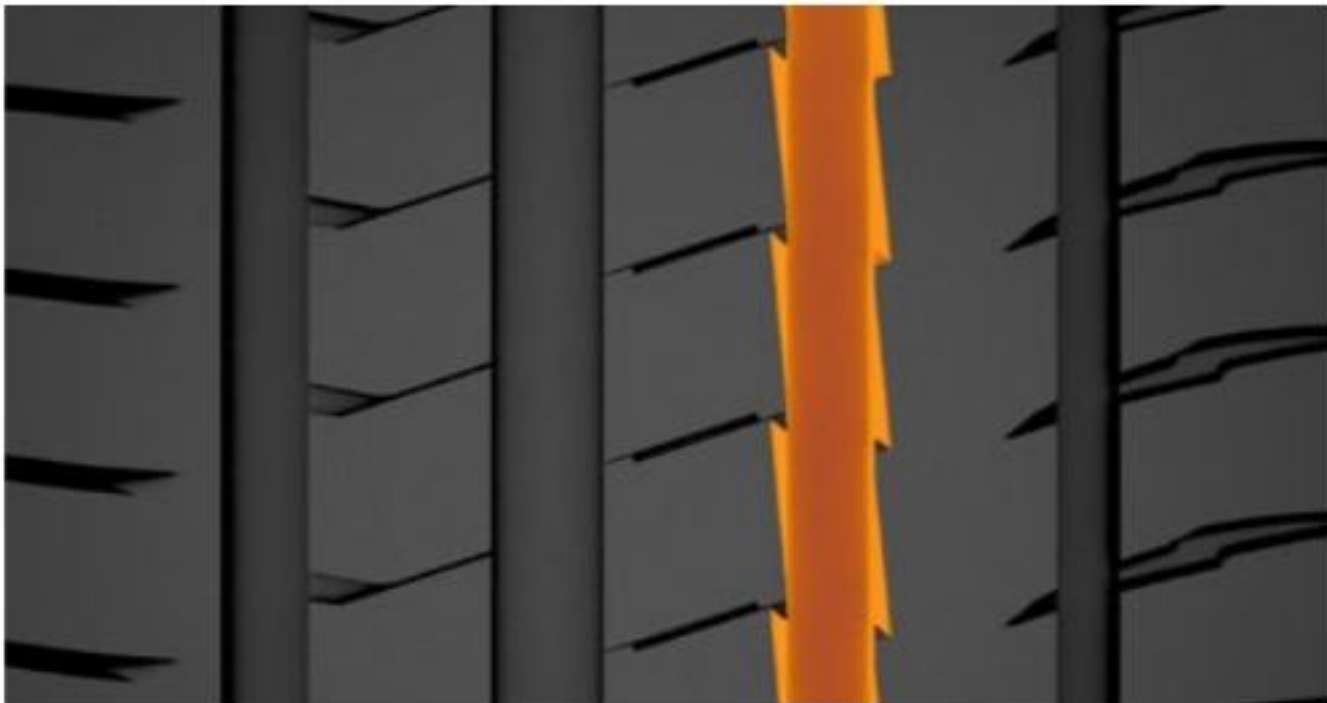

All new “helical” main groove combined with three main grooves allow rapid water ejection by adding an extra swirling effect



Soft tread appearance delivers a very quiet drive

Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
55 Series	195/55R15	89V	XL	580	50	6.0	206	593	7.8
	195/55R16	91V	XL	615	50	6.0	201	615	7.8
	205/55R16	94W	XL	670	50	6.5	214	632	7.8
	215/55R16	97W	XL	730	50	7.0	226	637	7.8
	205/55R17*	95V	XL	690	50	6.5	214	653	7.8
	205/55R17*	95W	XL						
	215/55R17	98W	XL	750	50	7.0	226	669	7.8
	225/55R17	101W	XL	825	50	7.0	233	675	7.8
	235/55R17*	103V	XL						
	235/55R17	103W	XL	875	50	7.5	245	685	7.8
50 Series	195/50R15*	82V		475	44	6.0	201	572	7.8
	195/50R16	88V	XL	560	50	6.0	201	597	7.8
	205/50R16	91W	XL	615	50	6.5	223	608	7.8
	205/50R17	93Y	XL	650	50	6.5	214	633	7.8
	215/50R17	95W	XL	690	50	7.0	226	648	7.8
	225/50R17	98W	XL	750	50	7.0	233	658	7.8
	225/50R18	99W	XL	775	50	7.0	233	678	7.8
	235/50R18	101Y	XL	825	50	7.5	245	688	7.8
45 Series	205/45R16	87W	XL	545	50	7.0	206	590	7.8
	205/45R17	88W	XL	560	50	7.0	206	616	7.8
	215/45R17	91Y	XL	615	50	7.0	213	626	7.8
	225/45R17	94Y	XL	670	50	7.5	225	634	7.8
	235/45R17	97Y	XL	730	50	8.0	236	644	7.8
	245/45R17	99Y	XL	775	50	8.0	243	652	7.8
	225/45R18	95Y	XL	690	50	7.5	225	659	7.8
	235/45R18	98Y	XL	750	50	8.0	247	669	7.8
	245/45R18	100Y	XL	800	50	8.0	243	677	7.8
	225/45R19*	96Y	XL	710	50	7.5	225	685	8.0
	245/45R19	102Y	XL	850	50	8.0	243	703	8.0

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For High-performance and Luxury Vehicles

UTQG 340 A A

HP5000 max

This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique “helical” main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.



Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
40 Series	245/40R17	95Y	XL	690	50	8.5	248	628	7.8
	225/40R18	92Y	XL	630	50	8.0	230	637	7.8
	235/40R18	95Y	XL	690	50	8.5	241	640	7.8
	245/40R18	97Y	XL	730	50	8.5	260	648	7.8
	225/40R19	93Y	XL	650	50	8.0	230	663	8.0
	235/40R19*	96Y	XL	710	50	8.5	241	666	8.0
	245/40R19	98Y	XL	750	50	8.5	260	677	8.0
	255/40R19	100Y	XL	800	50	9.0	260	687	8.0
	275/40R19	105Y	XL	925	50	9.5	278	703	8.0
	245/40R20	99Y	XL	775	50	8.5	248	699	8.0
	255/40R20	101Y	XL	825	50	9.0	260	707	8.0
35 Series	255/35R18	94Y	XL	670	50	9.0	260	630	7.8
	265/35R18	97Y	XL	730	50	9.5	283	636	8.0
	275/35R18	99Y	XL	775	50	9.5	288	650	8.0
	235/35R19	91Y	XL	615	50	8.5	257	642	8.0
	245/35R19	93Y	XL	650	50	8.5	248	650	8.0
	255/35R19	96Y	XL	710	50	9.0	260	661	8.0
	265/35R19	98Y	XL	750	50	9.5	271	669	8.0
	275/35R19	100Y	XL	800	50	9.5	278	670	8.0
	235/35R20	92Y	XL	630	50	8.5	241	667	8.0
	245/35R20	95Y	XL	690	50	8.5	257	675	8.0
	255/35R20	97Y	XL	730	50	9.0	260	681	8.0
	265/35R20	99Y	XL	775	50	9.5	271	690	8.0
	275/35R20	102Y	XL	850	50	9.5	278	695	8.0
	295/35R20	105Y	XL	925	50	10.5	301	709	8.3
	245/35R21	96Y	XL	710	50	8.5	248	705	8.0
30 Series	265/30R19	93Y	XL	650	50	9.5	271	643	8.0
	275/30R20	97Y	XL	730	50	9.5	287	675	8.0

HP5000 max - GSO Ratings



HP5000 max - Noise Rating as per EU labeling



Pattern availability may slightly vary based on country, please reach out to your account manager for details.





SU5000 max

THE NEXT-GEN SUV TIRE

For Crossovers and Sports Utility Vehicles

UTQG 440 A A

SU5000 max


The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Positioning of extra wide ribs with four main grooves enhance road contact area for better performance and fuel efficiency



Impressively engineered with a modern sipe style and positioning for a quiet and comfortable drive

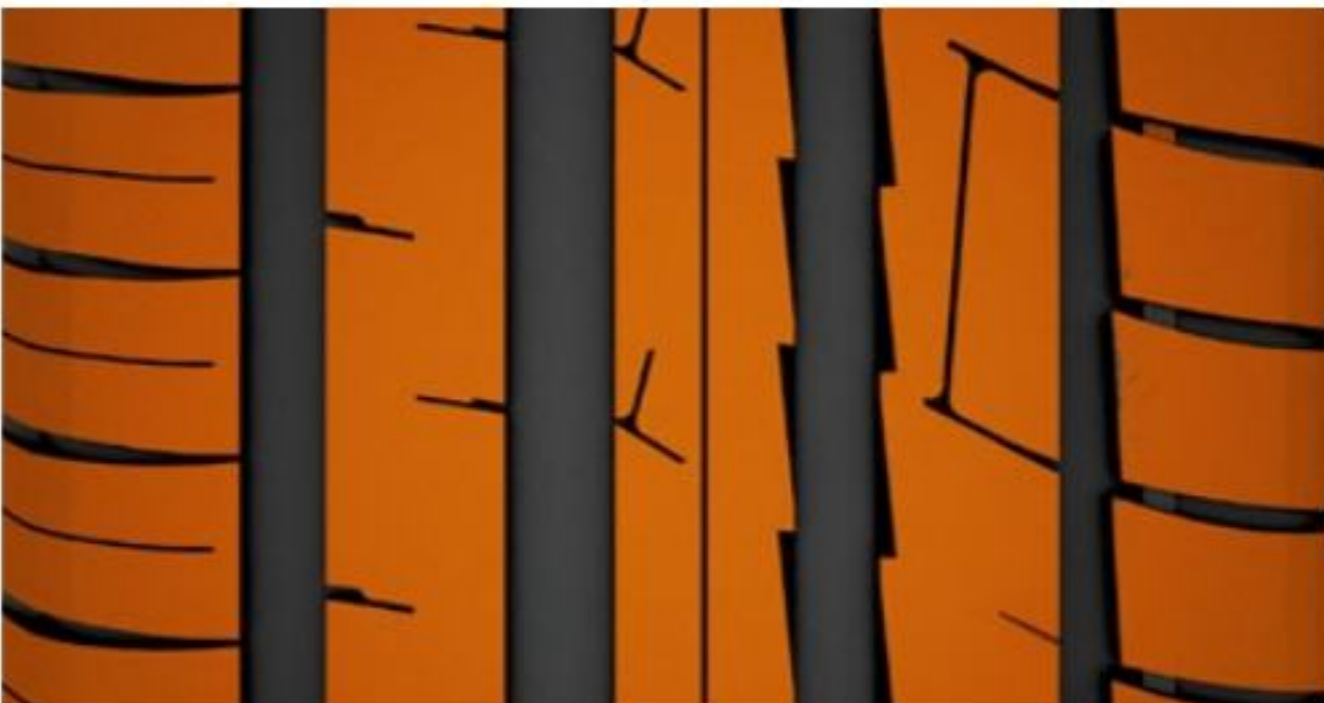

Sporty aesthetic and performance delivers a striking aesthetic seen on modern SUV's & Crossovers

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
65 Series	225/65R17	102H	850	44	6.5	230	719	8.0
	235/65R17	108V XL	1000	50	7.0	240	733	8.0
	275/65R18	116H	1250	44	8.0	279	810	8.0
60 Series	205/60R17*	97W XL	730	50	6.0	209	678	7.8
	235/60R17	102V	850	44	7.0	240	709	8.0
	235/60R18	103V	875	44	7.0	240	734	8.0
	245/60R18	105V	925	44	7.0	248	751	8.0
	255/60R18	112W XL	1120	50	7.5	260	763	8.0
	265/60R18	110V	1060	44	8.0	272	770	8.0
	285/60R18	116V	1250	44	8.5	310	799	9.0
	275/60R20	115V	1215	44	8.0	279	833	9.0
55 Series	215/55R18	99V XL	775	50	7.0	226	693	7.8
	215/55R18*	99W XL						
	225/55R18*	102Y XL	850	50	7.0	233	700	8.0
	225/55R18*	98V						
	235/55R18	104Y XL	900	50	7.5	245	710	8.0
	255/55R18	109Y XL	1030	50	8.0	265	732	8.0
	225/55R19*	103Y XL	875	50	7.0	233	731	8.0
	235/55R19	105Y XL	925	50	7.5	245	736	8.0
	255/55R19	111W XL	1090	50	8.0	265	763	8.0
	275/55R19	111W	1090	44	8.5	304	780	8.3
	235/55R20	102W	850	44	7.5	245	761	8.0
	255/55R20	110Y XL	1060	50	8.0	265	783	8.0
	265/55R20*	113V XL	1150	50	8.5	287	798	8.0
	275/55R20	117V XL	1285	50	8.5	290	805	9.0
50 Series	235/50R19	103W XL	875	50	7.5	245	719	8.0
	255/50R19	107W XL	975	50	8.0	265	734	8.0
	265/50R19	110Y XL	1060	50	8.5	277	744	8.0
	245/50R20	105W XL	925	50	7.5	253	749	8.0
	255/50R20	109Y XL	1030	50	8.0	265	759	8.0
	265/50R20	111V XL	1090	50	8.5	277	769	8.0
	275/50R20	113W XL	1150	50	8.5	301	779	8.3

* Newly added size

Pattern availability may slightly vary based on country, please reach out to your account manager for details.

For Crossovers and Sports Utility Vehicles

UTQG 440 A A

SU5000 max

The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
50 Series	285/50R20	116V	XL	1250	50	9.0	297	794	9.0
	275/50R21	113Y	XL	1150	50	8.5	284	809	8.3
	275/50R22	115V	XL	1215	50	8.5	284	830	8.3
45 Series	235/45R19*	99Y	XL	775	50	8.0	236	695	8.0
	245/45R20	103Y	XL	875	50	8.0	243	723	8.0
	255/45R20	105W	XL	925	50	8.5	268	734	8.0
	265/45R20	108Y	XL	1000	50	9.0	266	746	8.0
	275/45R20	110Y	XL	1060	50	9.0	273	751	8.3
	265/45R21*	108Y	XL	1000	50	9.0	266	766	8.0
	275/45R21	110Y	XL	1060	50	9.0	273	781	8.3
	285/45R22*	114W	XL	1180	50	9.5	285	815	9.0
40 Series	275/40R20	106Y	XL	950	50	9.5	278	728	8.0
	265/40R21	105Y	XL	925	50	9.5	282	740	8.0
	295/40R21	111Y	XL	1090	50	10.5	301	769	8.3
	265/40R22	106Y	XL	950	50	9.5	271	771	8.0
	275/40R22	108Y	XL	1000	50	9.5	278	779	8.3
	285/40R22	110Y	XL	1060	50	10.0	303	781	8.3
	305/40R22	114W	XL	1180	50	11.0	319	803	9.0
35 Series	315/35R20	110Y	XL	1060	50	11.0	320	728	9.0
	295/35R21	107Y	XL	975	50	10.5	301	739	8.3
	265/35R22	102Y	XL	850	50	9.5	271	740	8.0
	285/35R22	106Y	XL	950	50	10.0	297	758	8.3

* Newly added size

SU5000 max - GSO Ratings



SU5000 max - Noise Rating as per EU labeling



Pattern availability may slightly vary based on country, please reach out to your account manager for details.

SU5000 max

www.zestex.com



021287932NF2
02133420

TREADWEAR 111



AT5000 max


For 4x4's on All Terrain

SUMMER RANGE UTQG 500 A B

AT5000 max



Aggressive, interlocking center blocks Dense interlocking tread blocks improve on-road stability and handling while maintaining strong off-road traction in mud and dirt.

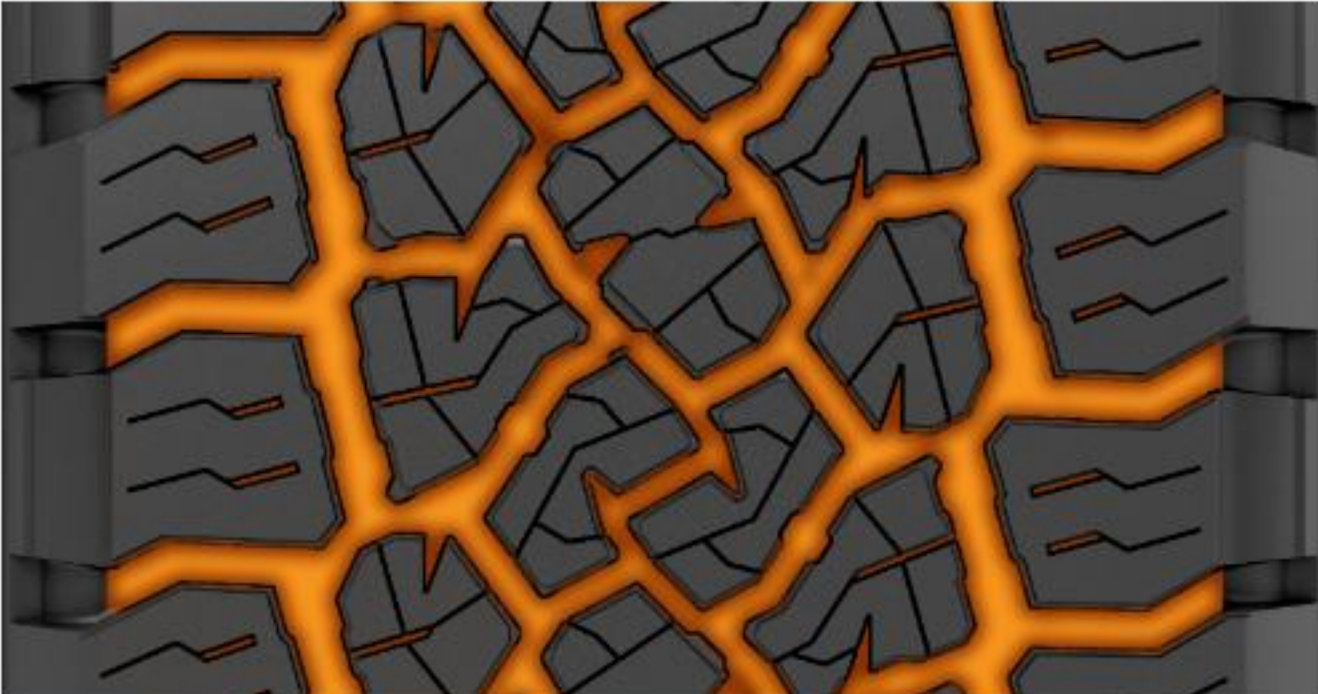

High void ratio and circumferential grooves Wide grooves and high void ratio enhance wet-road resistance and quickly evacuate mud and water for consistent traction.



Deep shoulder blocks with aggressive sidewall styling Larger, deeper shoulder blocks provide strong grip, better cornering traction, and effective self-cleaning to remove debris.

							P METRIC	
Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	265/70R16	116T XL	1250	50	8.0	272	778	10.4
	265/70R17	116T XL	1250	50	8.0	272	804	10.4
	285/70R17	117T	1285	44	8.5	292	832	10.4
65 Series	265/65R17	116T XL	1250	50	8.0	272	776	10.4
	265/65R18	114T	1180	44	8.0	272	801	10.4
	275/65R18	116T	1250	44	8.0	279	815	10.4
60 Series	265/60R18	110T	1060	44	8.0	272	770	10.4
	285/60R18	120S XL	1400	50	8.5	292	794	10.4
55 Series	275/55R20	117T XL	1285	50	8.5	284	810	10.4
50 Series	265/50R20	111T XL	1090	50	8.5	277	774	10.4

									LT METRIC	
Series	Size	PR	Load & Speed Index	Maximum Load (Single)	Maximum Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
85 Series	LT 235/85R16	10	120/116S	1380	1260	80	6.5	235	806	13.7
75 Series	LT 265/75R16	10	123/120S	1550	1400	80	7.5	267	804	13.7
	LT 285/75R16	10	126/123S	1700	1550	80	8.0	286	834	13.7
70 Series	LT 255/70R15	8	113/110S	1150	1060	65	7.5	260	739	13.7
	LT 265/70R17	10	121/118S	1450	1320	80	8.0	272	804	13.7
	LT 285/70R17	10	121/118S	1450	1320	80	8.5	292	832	13.7
	LT 315/70R17	10	126/123S	1700	1550	65	9.5	323	874	13.7
65 Series	LT 265/65R17	10	120/117S	1400	1285	80	8.0	272	775	13.7
	LT 285/65R18	10	125/122S	1650	1500	80	8.5	292	827	13.7
60 Series	LT 265/60R18	10	119/116S	1360	1250	80	8.0	272	770	13.7
	LT 285/60R18	10	122/119S	1500	1360	80	8.5	292	794	13.7

Pattern availability may slightly vary based on country, please reach out to your account manager for details.



ZEETEX

AT5000 max

ZEETEX

1001 00001

MADE IN THE USA




CT5000 max

For Vans and Transport Vehicles

SUMMER RANGE


CT5000 max

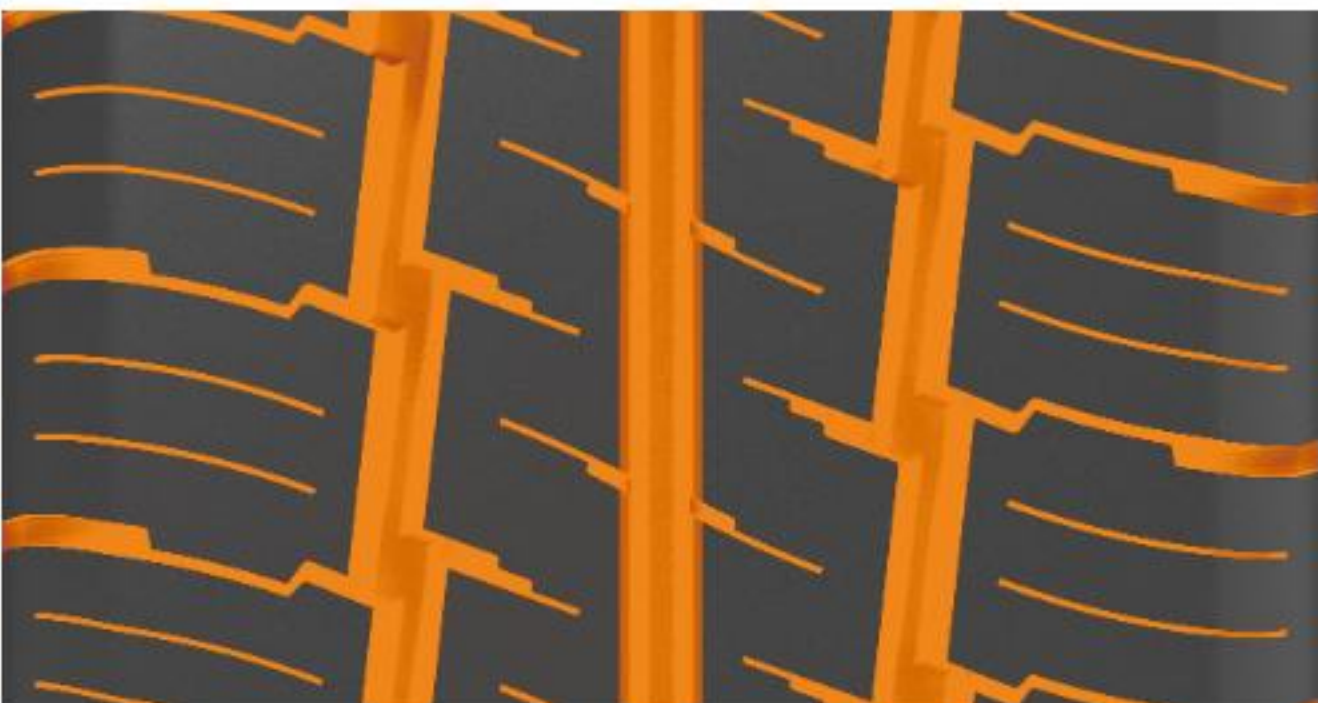

Deep circumferential grooves & multiple sipes
Deep grooves and dense sipes enhance water evacuation, reducing hydroplaning and improving traction on wet and dry roads.



Robust center ribs & interlocking shoulder blocks
Solid center ribs and interlocking shoulder blocks improve stability, load distribution, and steering response for heavy-duty use.

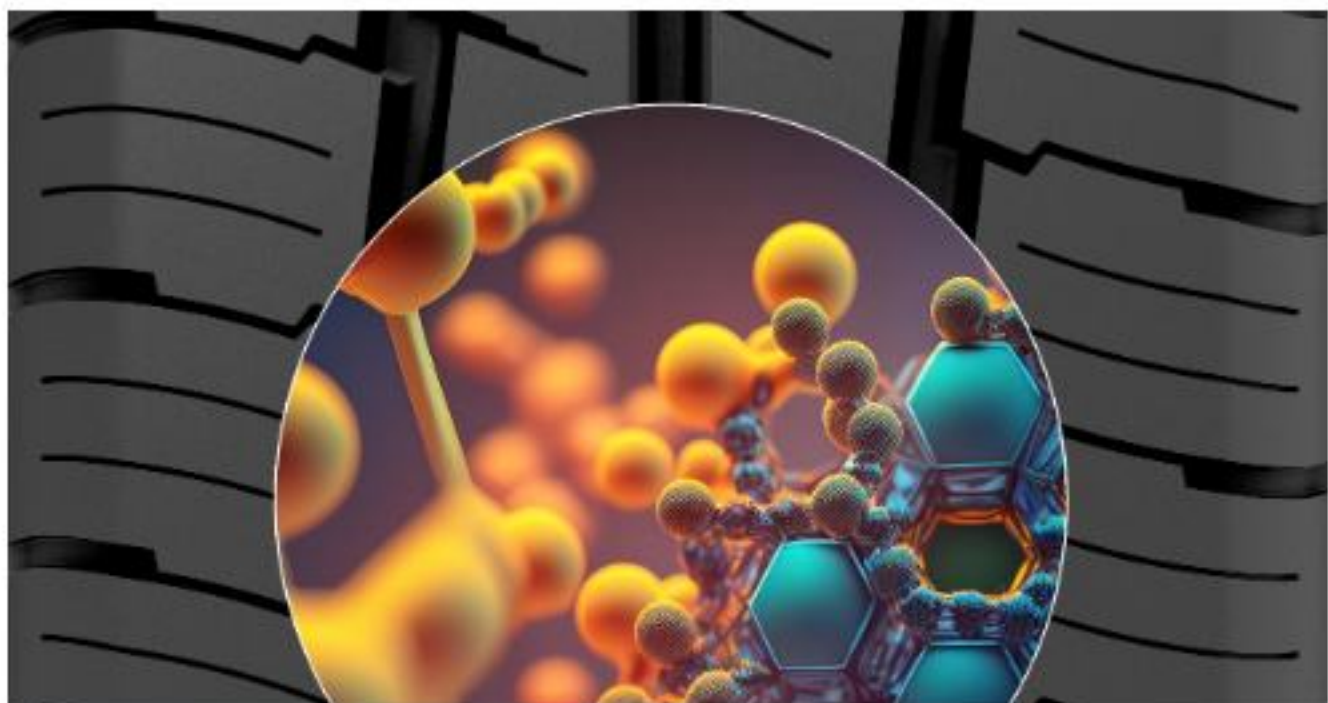

Optimized tread compound & block geometry
Uniform block design with a durable compound ensures even wear, longer tread life, and better fuel efficiency.

Series	Size	PR	Load & Speed Index	Maximum Load (Single)	Maximum Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
75 Series	205/75R14C	8	109/107S	1030	975	69	5.5	203	664	8.8
	205/75R16C	8	110/108T							
	205/75R16C	10	113/111T	1150	1090	77	5.5	203	714	8.8
70 Series	215/70R15C	8	109/107T	1030	975	65	6.5	221	678	8.8
	225/70R15C	8	112/110T	1120	1060	65	6.5	228	697	9.5
	215/70R16C	8	108/106T	1000	950	55	6.5	221	708	8.8
65 Series	215/65R16C	8	109/107T	1030	975	69	6.5	221	681	8.8
	235/65R16C	8	115/113T							
	235/65R16C	10	121/119R	1450	1360	83	7.0	240	712	8.8
LTRC	185R14C	8	102/100T	850	800	65	5.5	188	650	8.8
	195R14C	8	106/104T	950	900	65	5.5	198	666	8.8
	195R15C	8	106/104S	950	900	65	5.5	200	690	8.8
	205R16C	8	110/108T	1060	1000	65	6.0	208	736	8.8

Pattern availability may slightly vary based on country, please reach out to your account manager for details.



CT5000 max

ZETEX

ZETEX

185R14C



HT5000 max

THE NEXT-GEN HIGHWAY TERRAIN TIRE

For 4x4's on Highway Terrain
UTQG 500 A A

HT5000 max


This next-gen highway terrain tire is a trendsetter that features a unique asymmetrical pattern and a distinct sidewall design uncommon for a 4x4 tire. the HT5000 max is designed to maximize stability and handling while offering extra grip and a silent drive.



A unique asymmetrical tread design with a distinct sidewall enhances the appearance of any 4x4 vehicle




Zig-zag, multi-waves and straight sipes increase grip on wet and dry roads

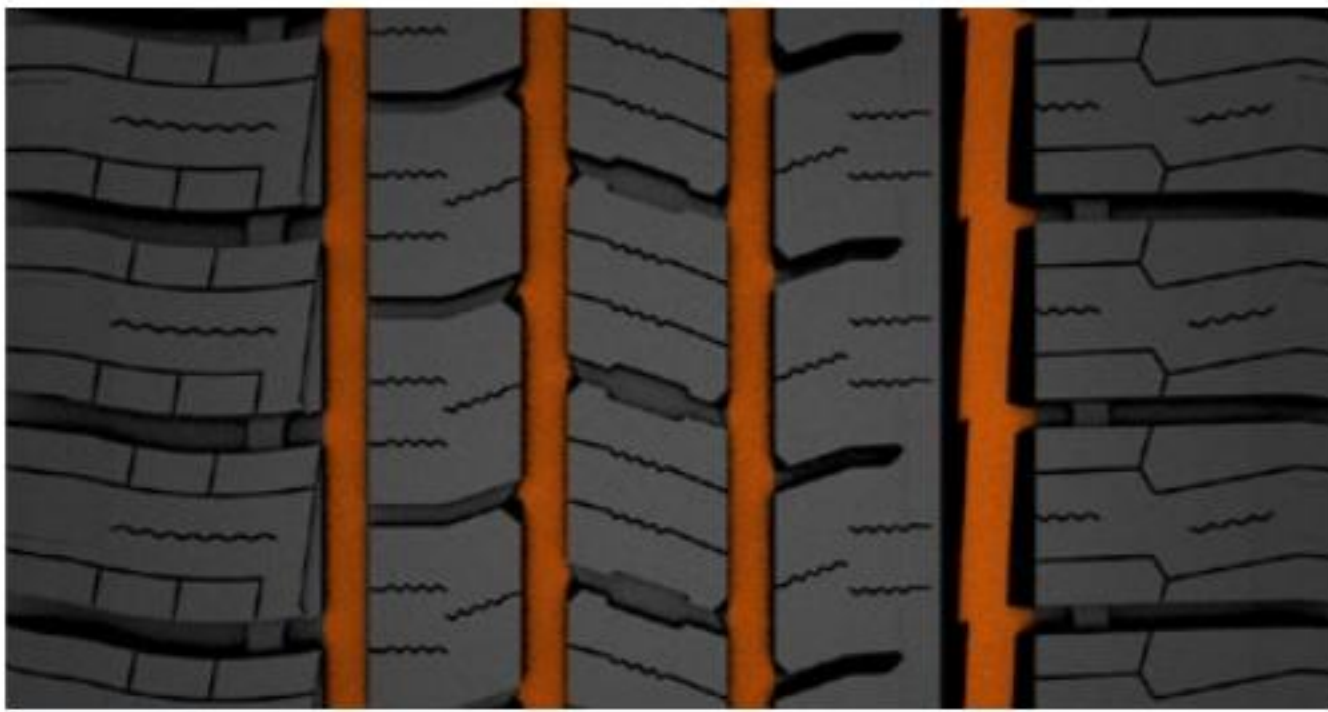


Four circumferential main grooves offer better stability and handling and reduce noise while driving on highways

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	245/75R16	111T	1090	44	7.0	248	769	8.5
	265/75R16	116T	1250	44	7.5	267	799	8.5
70 Series	215/70R16	100H	800	44	6.5	221	703	8.5
	225/70R16	103H	875	44	6.5	228	717	8.5
	235/70R16	106H	950	44	7.0	240	731	8.5
	245/70R16	111H XL	1090	50	7.0	248	745	8.5
	255/70R16	111H	1090	44	7.5	260	759	8.5
	265/70R16	112H	1120	44	8.0	272	773	8.5
	265/70R17	115H	1215	44	8.0	272	799	8.5
	255/70R18	113H	1150	44	7.5	260	810	8.5
	265/70R18	116H	1250	44	8.0	272	829	8.5
65 Series	245/65R17	111H XL	1090	50	7.0	248	745	8.5
	265/65R17	112H	1120	44	8.0	272	771	8.5
	275/65R17	115H	1215	44	8.0	279	790	8.0
	285/65R17	116H	1250	44	8.5	292	802	8.3
	265/65R18	114H	1180	44	8.0	272	796	8.5

HT5000 max - GSO Ratings

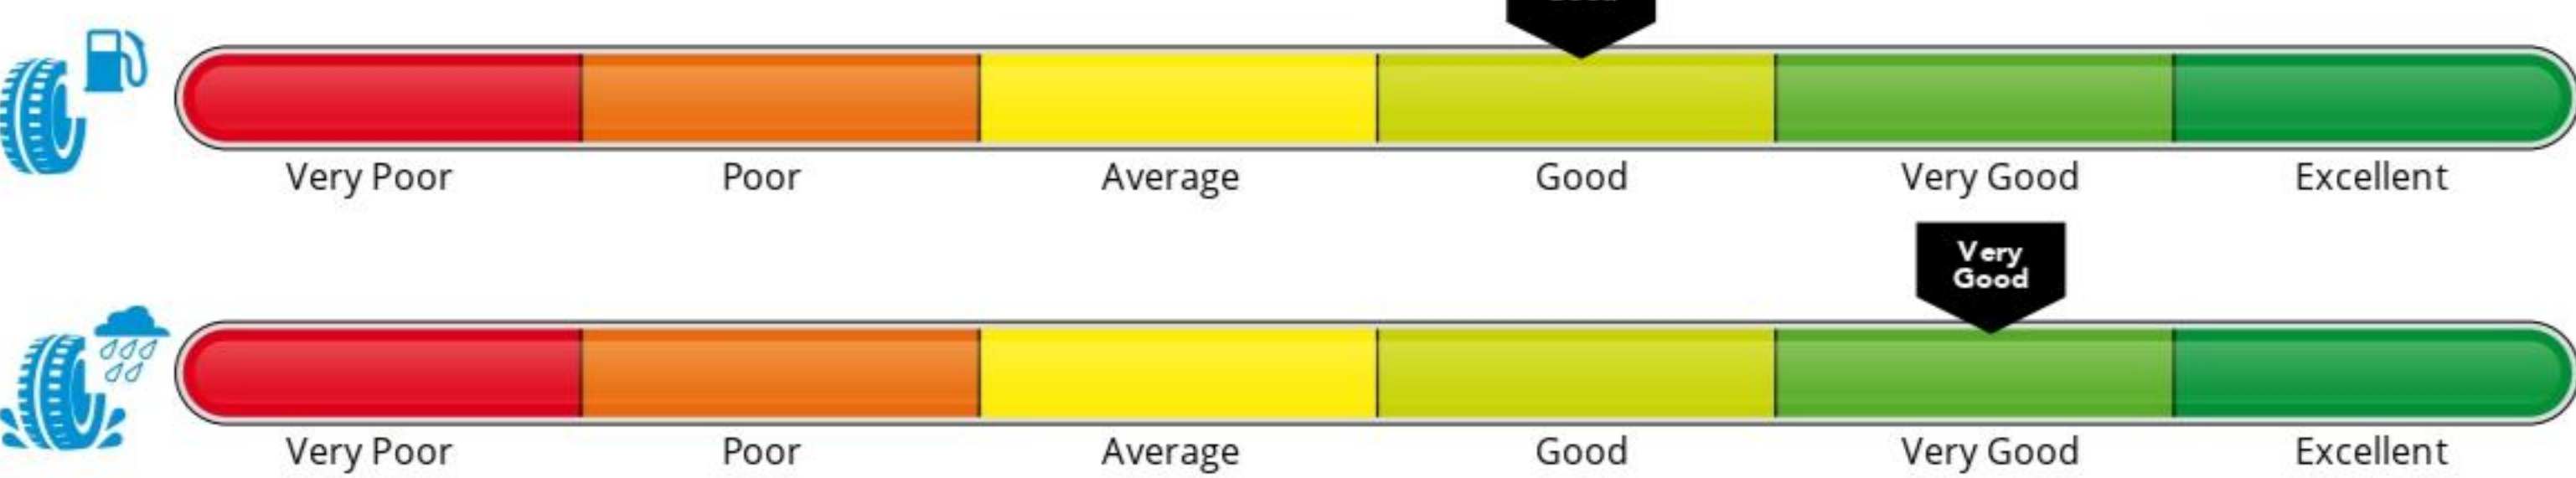

HT5000 max - Noise Rating as per EU labeling

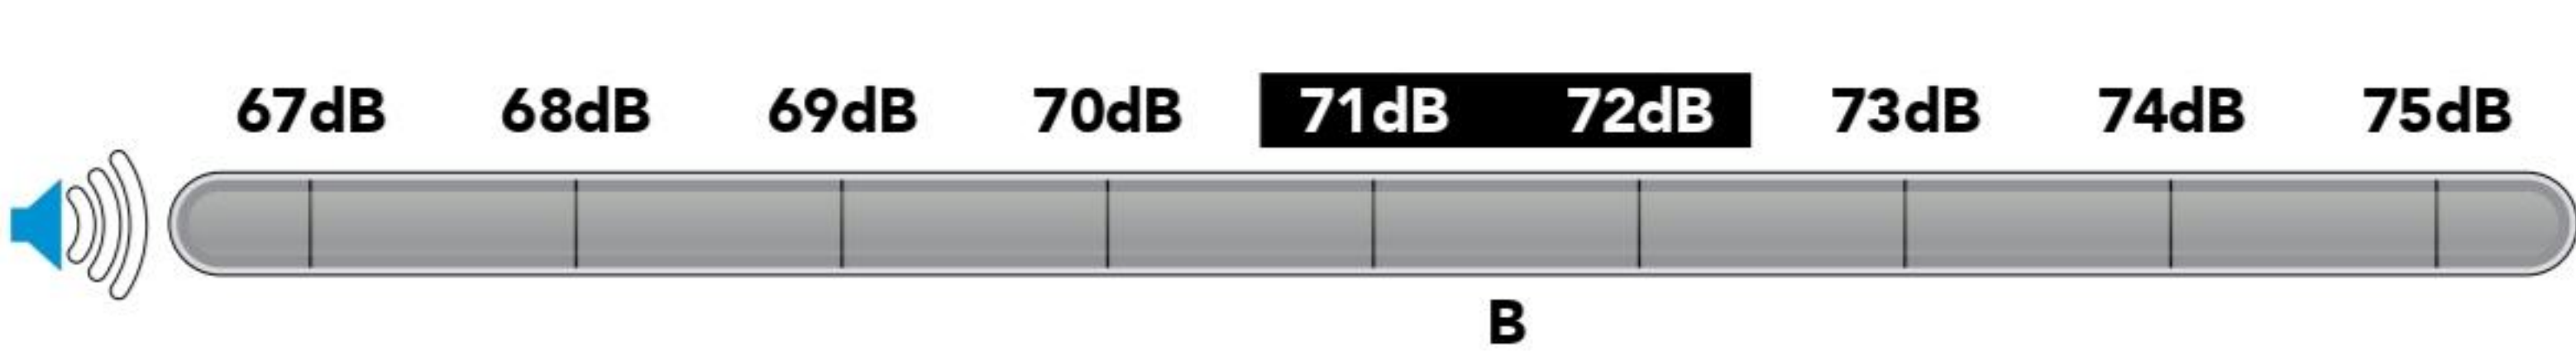

Pattern availability may slightly vary based on country, please reach out to your account manager for details.



**MAX RANGE OF ZEETEX IS BACKED BY UNIQUE &
SECOND TO NONE WARRANTY**

5 YEARS

WARRANTY PERIOD
5 YEARS

**100
DAYS**

NO QUESTIONS ASKED
REPLACEMENT WARRANTY



Jebel Ali Free Zone (South)
P.O.Box: 262176, Dubai, U.A.E., Ph: +97148073626

mea.zeetex.com



Zeetex MEA



@zeetexmea



Zeetex MEA